





SYSTEMFLO

SLB-C, SLB-S, SLB-N SERIES Catalog

VERTICAL MULTISTAGE CENTRIFUGAL PUMPS

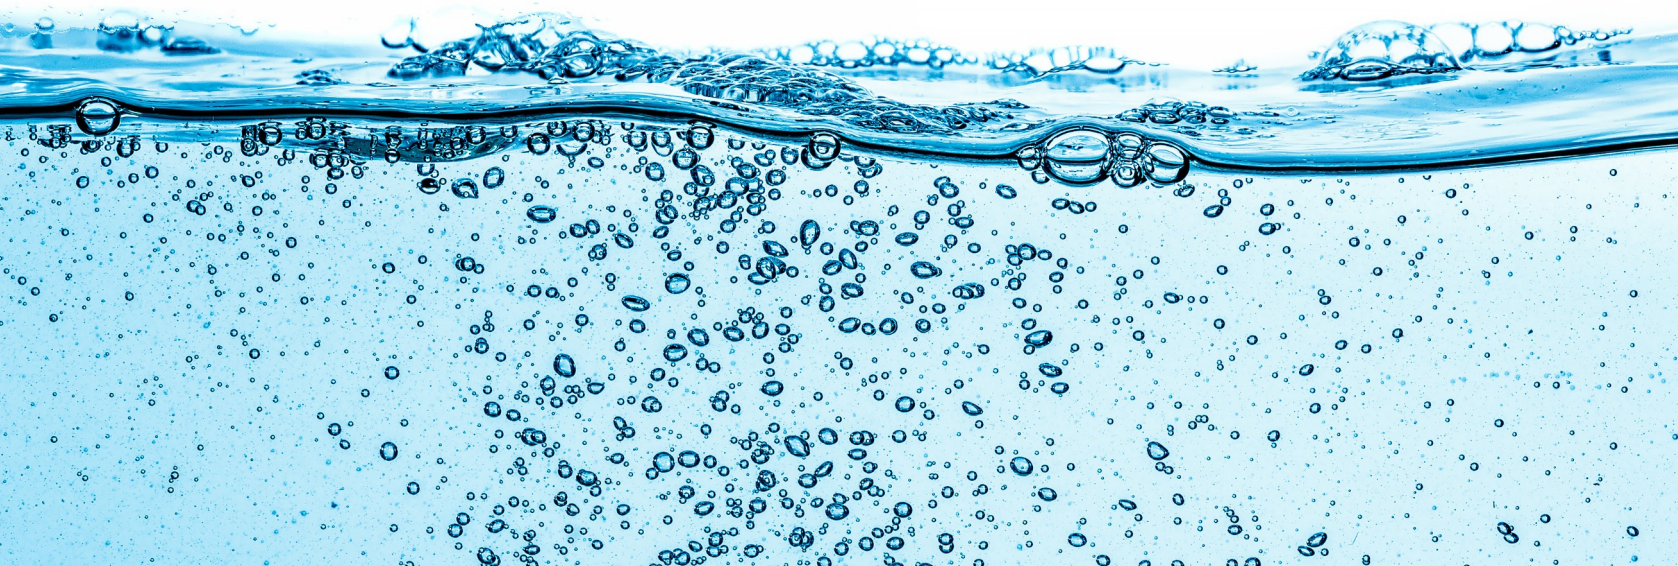

Performance Range

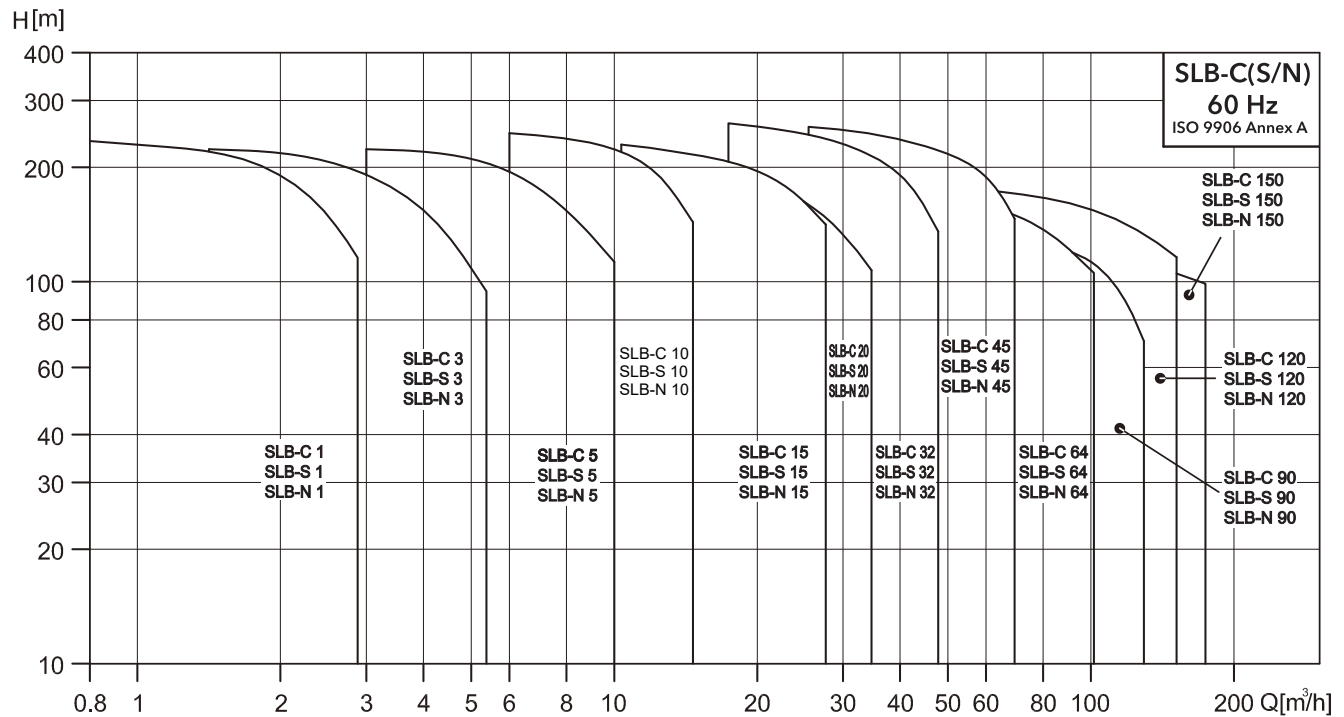

Product Data

Range	1	3	5	10	15	20
Nominal flow (m³/h)	1.2	3.6	6	12	18	24
Flow range (m³/h)	0.8-2.9	1.5-5.4	3-10	6-15.5	10.5-28	12.5-35
Max. pressure (bar)	23.5	23.3	23	24.5	23.5	20.5
Fluid temperature (°C)	-15 to +120					
Motor power (kW)	0.37-3.0	0.37-4.0	0.55-7.5	0.75-11	1.5-18.5	2.2-18.5
Version						
SLB-C: Cast iron and Stainless steel EN 1.4301/AISI 304	●	●	●	●	●	●
SLB-S: Stainless steel EN 1.4301 AISI 304	●	●	●	●	●	●
SLB-N: Stainless steel EN 1.4401/AISI 316	●	●	●	●	●	●
Motor						
Mains connection 1- (V/Hz)	0.37 ~ 0.75 kW 110 / 220 V					
	1.1 ~ 2.2 kW 220 ~ 240 V					
Mains connection 3-(V/Hz)	0.37 ~ 1.1 kW 220 ~ 255 / 380 ~ 440 V					
	1.5 ~ 18.5 kW 220 ~ 277 / 380 ~ 480 V					
Insulation class	F					
Enclosure class	IP 55					
Ambient temperature	50°C					
	SLB-C,SLB-S,SLB-N Pipe Connection					
Flange(ANSI)	1 1/4"	1 1/4"	1 1/4"	2"	2"	2"
Oval Flange	1"	1"	1 1/4"	1 1/2"	2"	2"
SLB-S,SLB-N Pipe Connection						
Victaulic-connections	1 1/4"	1 1/4"	1 1/4"	2"	2"	2"
Mechanical Seals						
SiC/SiC	Standard					
Seals						
EPDM	Standard					
Viton						

* Flange standards : Refer to dimensional drawings

Product Data

Range	32	45	64	90	120	150
Nominal flow (m³/h)	38	54	77	108	140	180
Flow range (m³/h)	18-48	26-70	36-102	54-146	60-160	78-180
Max. pressure (bar)	27	26	17.8	15.9	18.5	15.3
Fluid temperature (°C)	-15 to +120					
Motor power (kW)	2.2-30	5.5-45	7.5-45	11-45	18.5-75	18.5-75
	Version					
SLB-C: Cast iron and Stainless steel EN 1.4301/AISI 304	●	●	●	●	●	●
SLB-S: Stainless steel EN 1.4301 AISI 304	●	●	●	●	●	●
SLB-N: Stainless steel EN 1.4401/AISI 316	●	●	●	●	●	●
	Motor					
Mains connection 1- (V/Hz)	2.2 kW 220 ~ 240 V					
Mains connection 3-(V/Hz)	2.2 ~ 22 kW 220 ~ 277 / 380 ~ 480 V					
	30 ~ 37 kW 220 / 440 V					
	45 ~ 75 kW 208 ~ 230 / 460 V					
Insulation class	F					
Enclosure class	IP 55					
Ambient temperature	50°C					
	SLB-C,SLB-S,SLB-N Pipe Connection					
Flange	2 1/2"	3"	4"	4"	5"	5"
	SLB-S,SLB-N Pipe Connection					
Victaulic-connections	N/A	N/A	N/A	N/A	N/A	N/A
	Mechanical Seals					
SiC/SiC	Standard					
	Seals					
EPDM	Standard					
Viton						

* Flange standards : Refer to dimensional drawings

Pump

The SLB-C,SLB-S and SLB-N pumps are non-self priming vertical multistage pump of in-line design with flange oval and Victaulic of equally sized suction and discharge ports.

Stage construction with stainless steel impellers, chambers and pressure casing.

All pumps are equipped with a cartridge type mechanical seal for easy maintenance.

SLB-C,SLB-S and SLB-N pumps have different pump sizes and various numbers of stages to provide the flow and the pressure required.

Applications

WATER SUPPLY AND PRESSURE BOOSTING	IRRIGATION AND AGRICULTURE
Pressure boosting in buildings, hotels, residential complexes	Greenhouses
Pressure booster stations, supply of water networks	Sprinkler irrigation
Pressure boosting for industrial water supply	Field irrigation (flooding)
LIGHT INDUSTRY	WATER TREATMENT
Washing and cleaning systems	Water softeners and de-mineralization
Car washing facilities	Reverse Osmosis systems
Fire fighting systems	Distillation systems
Process water systems	Filtration
Machine tools (cooling lubricants)	Ultra-filtration systems
HEATING, VENTILATION AND AIR-CONDITIONING	
Boilers	
Induction heating	
Heat exchangers	
Refrigerators	
Cooling towers and systems	
Temperature control systems	

Pump Nameplate Information

Type	①				
Model	②				
f	③	Hz	P2	④	kW
n	⑤	min ⁻¹	H _{max}	⑥	m
Q	⑦	m ³ /h	H	⑧	m
p _{max} /t _{max}	⑨		bar/°C	⑩	
Serial No.	⑪				

- ① Pump Type - Seal Type
- ② Pump Model
- ③ Frequency
- ④ Rated Power
- ⑤ Speed
- ⑥ Maximum Head
- ⑦ Capacity
- ⑧ Head Range
- ⑨ Max. Operating Pressure / Max. temperature
- ⑩ Rotating Direction
- ⑪ Serial number


① INDUCTION MOTOR		C _{US}	
TYPE	②	FR. ③	POLES 2 IEC 60034
OUTPUT	④ HP kW	RATING CONT. INS. ⑤	IP ⑥
⑦ Hz	Δ ⑧ V	⑨ A	E.F.F.% ⑩
	Y V	A rpm	⑪
BEARINGS	⑫		WEIGHT kg
SER.NO.	⑬		DATE

- ① Phase
- ② Motor Model
- ③ Frame
- ④ Rated Power
- ⑤ Insulation
- ⑥ Ingress Protection
- ⑦ Frequency
- ⑧ Voltage
- ⑨ Ampere
- ⑩ Efficiency
- ⑪ Revolutions Per Minute
- ⑫ Bearing Type
- ⑬ Serial Number

Mechanical Seals

Standard Cartridge type mechanical seal made of Silicon Carbide/Silicon Carbide/EPDM or Viton.
Based on the type of application, alternative materials are available for the seal and the elastomers.
The cartridge type mechanical seal can be replaced in minutes without special tools and without dismantling the pump.

List of Materials	
Q : Silicon carbide	E:EPDM
U:Tungsten carbide	V:Viton
B:Carbon	C:Seal Type
H:Seal Type	



Seal Type			
SLB-C SLB-S SLB-N	1,3,5,10,15, 20,32,45,64,90	120,150	
		0.5-6.0HP	75-100HP
Seals Face Material			
QQ	●	●	●
UU	○	○	-
QB	○	○	-
UB	○	○	-
Secondary Seal Material			
E	●	●	●
V	○	○	○

● Std. ○ Opt. - N/A

Minimum inlet pressure - NPSHA

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump.

The maximum suction lift "H" in feet can be calculated as follows:

$$H = P_b - \text{NPSHR} - H_f - H_v - H_s$$

P_b = Barometric pressure in feet absolute.

(Barometric pressure can be set to 33.9 feet.

At sea level. In closed systems, P_b indicates system pressure in feet.)

NPSHR = Net Positive Suction Head Required in feet.

(To be read from the NPSHR curve at the highest flow the pump will be delivering.)

H_f = Friction loss in suction pipe in feet.

(At the highest flow the pump will be delivering.)

H_v = Vapor pressure in feet.

(To be read from the vapor pressure scale.

" H_v " depends on the liquid temperature " T_m ".)


H_s = Safety margin = minimum 2.0 feet.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" feet.

If the "H" calculated is negative, an inlet pressure of minimum "H" feet is required.

Note: In order to avoid cavitation never, select a pump whose duty point lies too far to the right on the NPSHR curve.

Always check the NPSHR value of the pump at the highest possible flow.

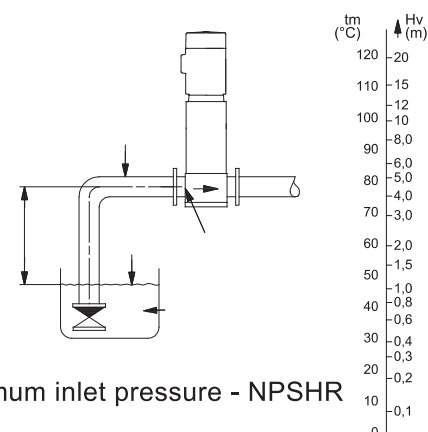

Minimum inlet pressure - NPSHR

Motor

- Squirrel cage , aluminum casing up to 22 kW, totally enclosed, fan-cooled, 2-pole induction motor.
- Electrical data
Enclosure class: IP55
Insulation class: F
- The motors have efficiency values that fall within the range normally referred to as high efficiency.
- Ambient temperature: Max. +50°C

Motor Data

Motor Type				Nominal current in [A]			
Pole	HP	kW	Flange	Frame	Phase	110/220V	220-240V
2	0.5	0.37	B14	71A	1Ø	6.2 / 3.1	-
	0.75	0.55		71B		8.0 / 4.0	-
	1.0	0.75		80A		10.4 / 5.2	-
	1.5	1.1		80B		-	7.6 / 8.9
	2.0	1.5		90S		-	9.6 / 9.7
	3.0	2.2		90L		-	13.8 / 12.5
Pole	HP	kW	Flange	Frame	Phase	△220-255V	Y380-440V
2	0.5	0.37	B5	71A	3Ø	1.7 - 1.7	1.0 - 1.0
	0.75	0.55		71B		2.4 - 2.4	1.4 - 1.4
	1.0	0.75		80A		3.1 - 3.1	1.8 - 1.8
	1.5	1.1		80B		4.0 - 3.5	2.3 - 2.0
Pole	HP	kW	Flange	Frame	Phase	△220-277V	Y380-480V
2	2.0	1.5	B5	90S	3Ø	5.7 - 5.4	3.3 - 3.1
	3.0	2.2		90L		8.1 - 7.2	4.7 - 4.2
	4.0	3		100L		11.1 - 9.7	6.4 - 5.6
	5.5	4		112M		14.3 - 13.1	8.3 - 7.6
	7.5	5.5		132S		19.2 - 16.9	11.1 - 9.8
	10.0	7.5		132S		25.4 - 22.1	14.7 - 12.8
	15.0	11.0		160M		37.0 - 33.9	21.4 - 19.6
	20.0	15.0		160M		49.2 - 41.4	28.5 - 23.9
	25.0	18.5		160L		59.7 - 49.3	34.5 - 28.5
	30.0	22.0		180M		70.4 - 58.5	40.7 - 33.8
Pole	HP	kW	Flange	Frame	Phase	△220 V	Y440 V
2	40	30	B5	200L	3Ø	95.7	47.9
	50	37		200L		117.30	67.9
Pole	HP	kW	Flange	Frame	Phase	△208-230V	Y460 V
2	60	45	B5	225M	3Ø	150.0 - 136.0	67.8
	75	55		250M		183.0 - 166.0	82.9
	100	75		280S		248.0 - 224.0	112.0

Maximum Inlet Pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the maximum permissible operating pressure. If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

Pump type	Flange & PJE				Oval Flange		
	Stages	Max. Operating Pressure	Stages	Max. Inlet Pressures	Stages	Max. Operating Pressure	Max. Inlet Pressures
SLB-C(S/N) 1	2 - 36	25 bar	2- 36	10 bar	2 - 23	16 bar	10 bar
SLB-C(S/N) 3	2 - 36	25 bar	2 - 29	10 bar	2 - 23	16 bar	10 bar
			31 - 36	15 bar	-	-	-
SLB-C(S/N) 5	2 - 36	25 bar	2 - 16	10 bar	2 - 22	16 bar	10 bar
			18 - 36	15 bar	-	-	-
SLB-C(S/N) 10	1 - 16	16 bar	1-6	8 bar	1 - 16	16 bar	8 bar
	17 - 22	25 bar	7 - 22	10 bar	-	-	-
SLB-C(S/N) 15	1 - 10	16 bar	1 - 3	8 bar	1 - 7	10 bar	8 bar
	12 - 17	25 bar	4 - 17	10 bar	-	-	-
SLB-C(S/N) 20	1 - 10	16 bar	1 - 3	8 bar	1 - 7	10 bar	8 bar
	12 - 17	25 bar	4 - 17	10 bar	-	-	-
SLB-C(S/N) 32	(1-1) - 7	16 bar	(1-1) - 4	4 bar			
	(8-2) - 14	30 bar	(5-2) - 10	10 bar			
			(11-2) - 14	15 bar			
SLB-C(S/N) 45	(1-1) - 5	16 bar	(1-1) - 2	4 bar			
	(6-2) - 11	30 bar	(3-2) - 5	10 bar			
	(12-2) - (13-2)	33 bar	(6-2) - (13-2)	15 bar			
SLB-C(S/N) 64	(1-1) - 5	16 bar	(1-1) - (2-2)	4 bar			
	(6-2) - (8-1)	30 bar	(2-1) - (4-2)	10 bar			
			(4-1) - (8-1)	15 bar			
SLB-C(S/N) 90	(1-1) - 4	16 bar	(1-1) - 1	4 bar			
	(5-2) - 6	30 bar	(2-1) - (3-2)	10 bar			
			3 - 6	15 bar			
SLB-C(S/N) 120	1 - 7	30 bar	1 - (2-1)	10 bar			
			2 - (5-1)	15 bar			
			(6-1) - 7	20 bar			
SLB-C(S/N) 150	(1-1) - 6	30 bar	(1-1) - 1	10 bar			
			(2-1) - (4-2)	15 bar			
			(5-2) - 6	20 bar			

* Rule to follow : The inlet pressure+the pressure against a closed valve < Max.Operating pressure.

Example Of Operating And Inlet Pressures

The values for operating and inlet pressures shown in the tables must not be considered individually but must always be compared, see the following examples:

Example 1:

The following pump type has been selected: SLB 3-29

Max. operating pressure: 25 bar

Max. inlet pressure: 10 bar

Discharge pressure against a closed valve: 18.6 bar , (see p.18)

This pump is not allowed to start at an inlet pressure of 10 bar , but at an inlet pressure of 25 bar - 18.6 bar = 6.4 bar.

Example 2:

The following pump type has been selected:SLB 10-2

Maximum operating pressure: 16 bar.

Maximum inlet pressure: 8 bar.

Discharge pressure against a closed valve: 2 bar. (See p.26)

This pump is allowed to start at an inlet pressure of 8 bar, as the discharge pressure against a closed valve is only 2 bar, which results in an operating pressure of 8 bar + 2 bar = 10 bar.

On the contrary, the maximum operating pressure of this pump is limited to 16 bar as a higher operating pressure will require an inlet pressure of more than 8 bar.

Pumped Liquids

SLB-C(S/N) pumps can handle a wide variety of liquids, each with its own characteristic.

SLB-C(S)

Non-corrosive liquids

For fluid transfer, circulation and pressure boosting of cold or hot clean water.

SLB-N

Industrial liquids

Light acids

The fluids covered in the list are not complete. Data on the application limits of different pump materials when handling any of the listed fluids are considered to be the best choices.

However, the table is intended as a general guide only, and cannot replace actual testing of the pumped fluids and pump materials under specific working conditions.

When choosing the pump version, sufficient attention should be given to the flow medium, such as density, solidification point, viscosity as well as ex-protection requirement. The limits of applicability of the pumps, based on pressure and temperature must also be considered.



• Recommended

Pumped Fluid	Fluid Concentration,temperature	SLB-C(S)		SLB-N	
		EPDM	Viton	EPDM	Viton
Acetic acid anhydride	25°C			•	
Alkaline cleaner		•			
Aluminium sulphate	10%,25°C				•
Ammonia water (A.hydroxide)	20%,40°C	•			
Ammonia hydrogen carbonate	10%,40°C	•		•	
Benzoic acid	10%,90°C				•
Boric acid	Unsaturated solution,60°C				•
Butanol	60°C	•			
Calcium acetate	30%, 50°C Saturated solution, 50°C	•			
Calcium hydroxide	1%, 20°C	•			
Chromic acid	90°C				•
Condensate	Unsaturated solution,60°C	•			
Copper sulphate	50°C			•	
Deionic (fully desalinated water)	100%,20°C	•			
Ethanol	40%,70°C	•	•	•	•
Ethylene glycol/Diethylene glycol Fixer	25°C				•
Formic acid	5%,20°C			•	
Fruit juice	50°C				•
Glycerine	50%,50°C	•			
Heating oil (Light)		•			
Hydraulic oil	100%,100°C		•		
Isopropanol		•			
Lactic acid	10%,20°C		•		
Linoleic acid	100%,20°C				•
Linseed oil	60°C		•		
Liqueur	60°C				•
Maize oil	80°C		•		

Pumped Liquids

Pumped Fluid	Fluid Concentration,temperature	SLB-C(S)		SLB-N	
		EPDM	Viton	EPDM	Viton
Maleic acid	50%,50°C				•
Methanol	100%,20°C	•			
Motor oil	100%,80°C	•			
Oil-water-mixture	100°C		•		
Oxalic acid	1%,20°C			•	
Peanut oil	100%,80°C		•		
Phosphoric acid	20%,20°C			•	
Polyglycols	90°C		•		•
Polyethylene glycols	40%,70°C	•			
Potassium carbonate	10%,60°C	•			
Potassium hydrogen carbonate	10%,60°C	•			
Potassium permanganate	5%,20°C			•	
Potassium sulphate	Unsaturated solution,80°C			•	
Rapeseed oil	100%,80°C		•		
Silicone oil	100%		•		
Sodium carbonate	10%,60°C			•	
Sodium hydroxide	25%,50°C			•	
Sodium nitrate	Unsaturated solution,80°C			•	
Sodium phosphate	5%,100°C			•	
Sodium sulphate	10%,60°C			•	
Sulphuric acid	5%,25°C				•
Water		•SLB-S		•	
Swimming pool water	35°C			•	
Deionized Distilled water	50°C			•	
Decarbonated water	50°C			•	
Soft water				•	
Heating water				•	
Boiler water				•	
Pure water				•	
Rinsing water		•SLB-S		•	



Material Construction

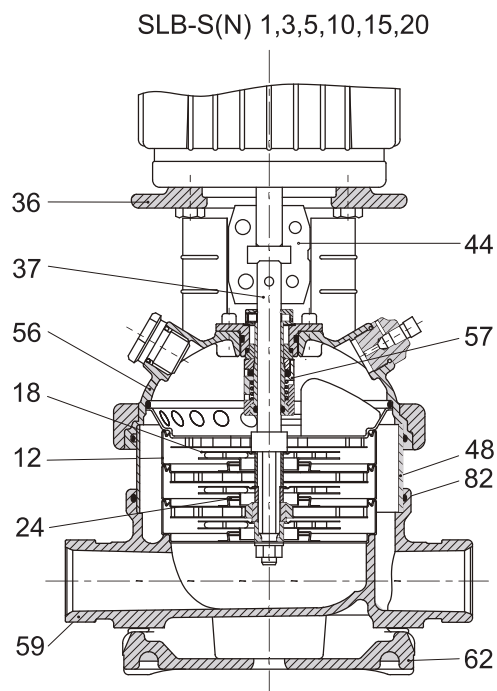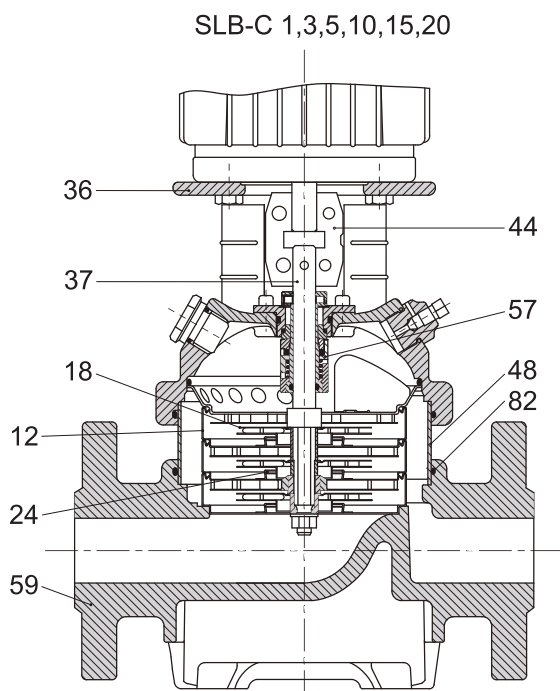

Materials

Pos.	Name	Material	SLB-C 1,3,5,10,15,20		SLB-S 1,3,5,10,15,20		SLB-N 1,3,5,10,15,20	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-200	ASTM 25B	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12
56	Pump head cover	Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer Sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	PTFE						
59	Base	Cast Iron	EN-GJL-200	ASTM 25B	N/A			
		Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJL-200	ASTM 25B	EN-GJL-200	ASTM 25B
44	Coupling	Fe-Cu-C	SINT C11	MPIF FC0525	SINT C11	MPIF FC0525	SINT C11	MPIF FC0525
57	Mechanical seal	Cartridge type						


Material Construction

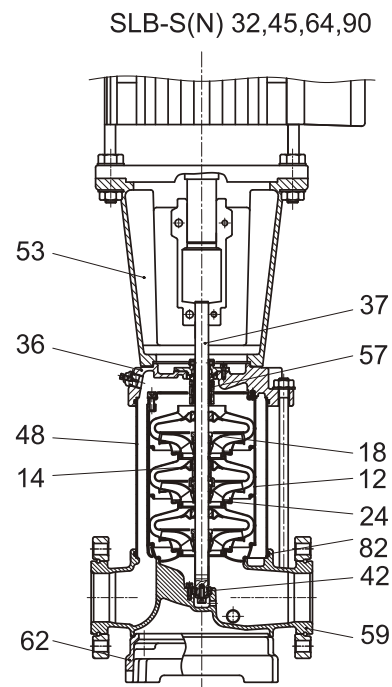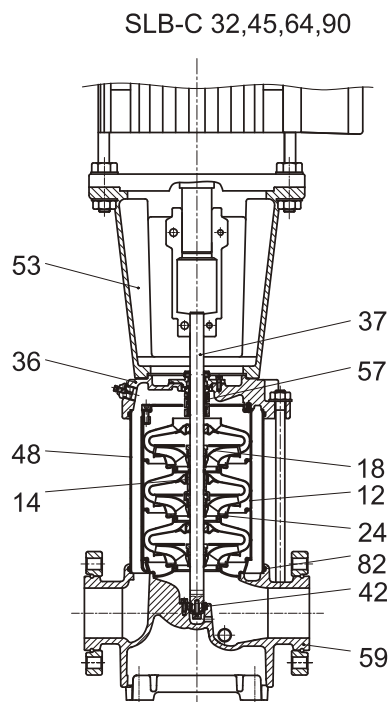

Materials

Pos.	Name	Material	SLB-C 32,45,64,90		SLB-S 32,45,64,90		SLB-N 32,45,64,90	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-250	ASTM 35B				
		Stainless steel			1.4301	AISI 304	1.4401	AISI 316
53	Motor Bracket	Cast Iron	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer Sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	Carbon Fiber + POB + PTFE						
59	Base	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
		Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
57	Mechanical seal	Cartridge type						
14	Bearing ring		Bronze				POB+Graphite+PTFE	
42	Bottom Bearing ring	Tungsten carbide/ Tungsten carbide						


Material Construction

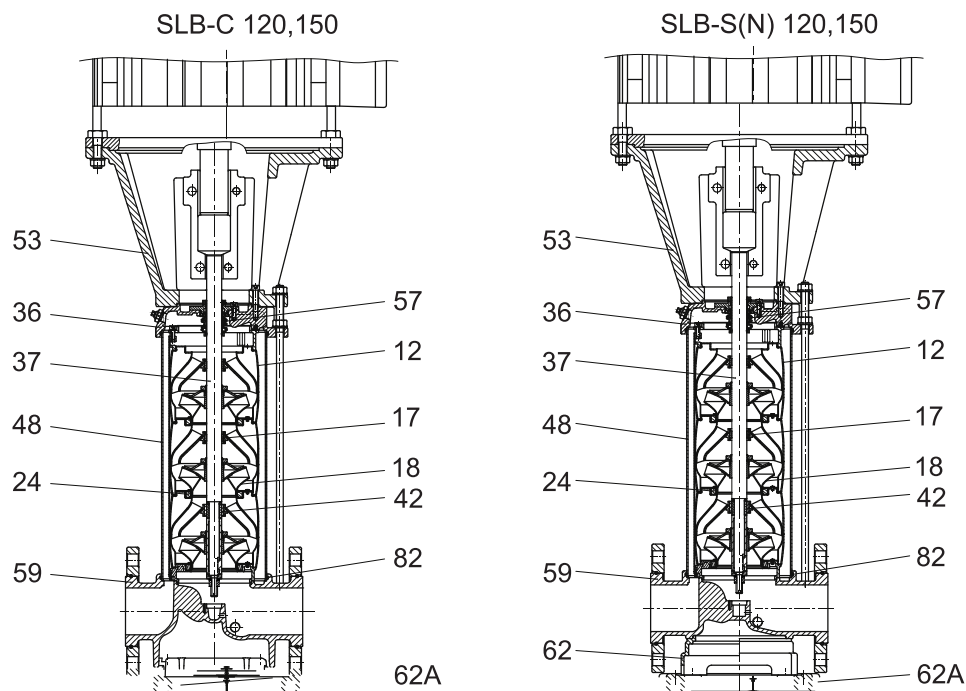


Materials

Pos.	Name	Material	SLB-C 120,150		SLB-S 120,150		SLB-N 120,150	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
		Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
53	Motor Bracket (15HP~60HP)	Cast Iron	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
	Motor Bracket (75HP~100HP)	Cast Iron	EN-GJL-450-10	ASTM 65-45-12	EN-GJL-450-10	ASTM 65-45-12	EN-GJL-450-10	ASTM 65-45-12
17	Bearing ring	PTFE						
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer Sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	EPDM						
59	Base	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
			N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJL-450-10	ASTM 65-45-12	EN-GJL-450-10	ASTM 65-45-12
62A	Base plate	Cast Iron	EN-GJL-450-10	ASTM 65-45-12	EN-GJL-450-10	ASTM 65-45-12	EN-GJL-450-10	ASTM 65-45-12
57	Mechanical seal	Cartridge type						
42	Bottom Bearing ring	SiC / SiC						

Performance Range

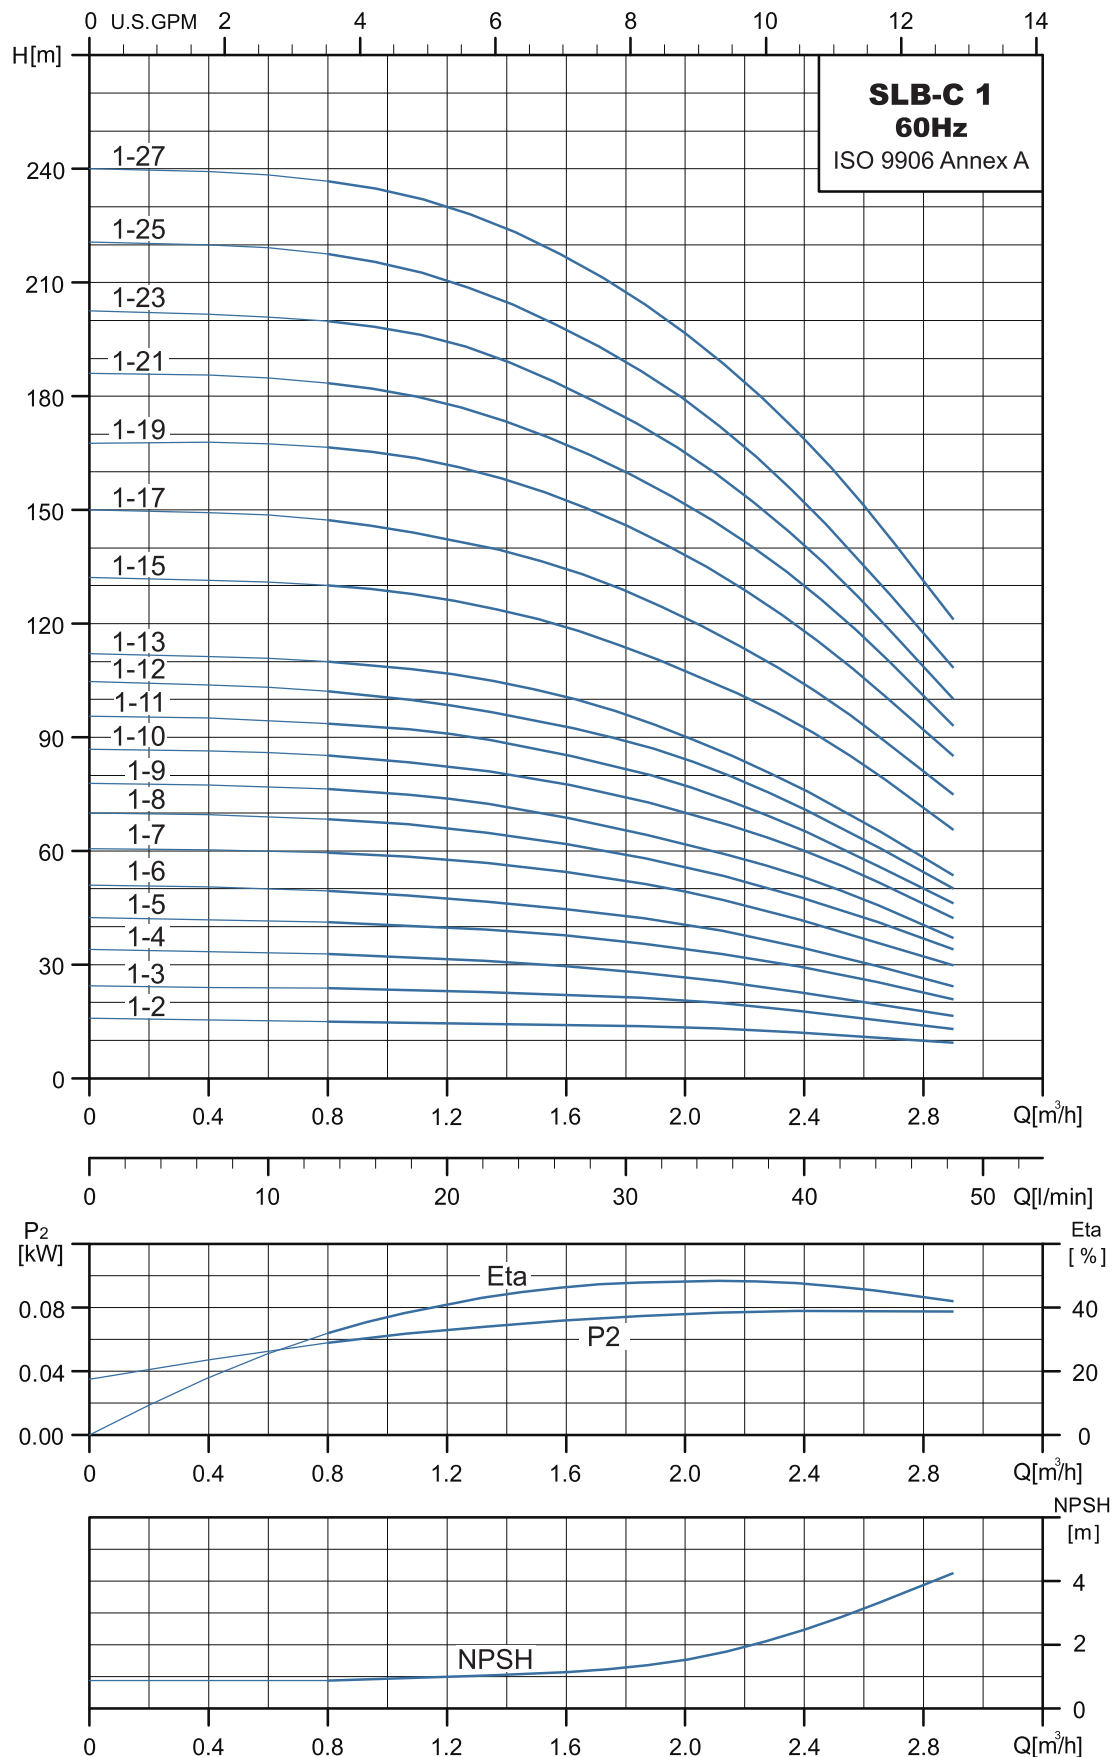


Dimensions and Weights

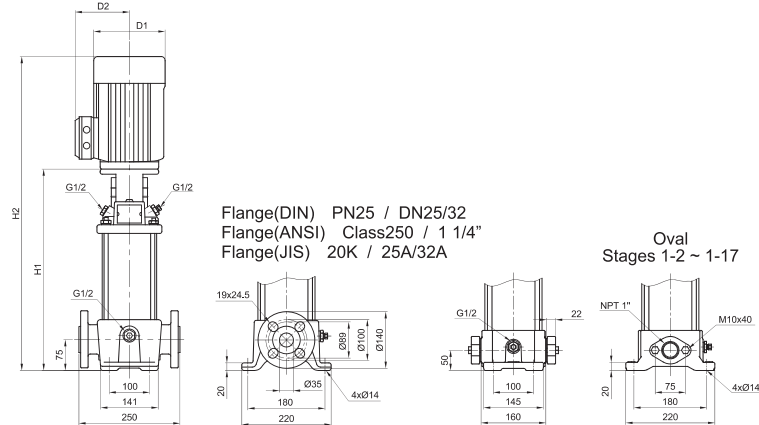


Pump Type	Dimension[mm]						Net Weight [kg]	
	flange		OVAL		D1	D2	flange	OVAL
	H1	H2	H1	H2				
SLB-C 1-2	279	474	254	449	141	115	23.4	19.3
SLB-C 1-3	279	474	254	449	141	115	23.4	19.3
SLB-C 1-4	297	492	272	467	141	115	23.8	19.7
SLB-C 1-5	315	510	290	485	141	115	24.7	20.6
SLB-C 1-6	333	528	308	503	141	115	25.0	20.9
SLB-C 1-7	357	592	332	567	141	115	27.5	23.4
SLB-C 1-8	375	610	350	585	141	115	27.9	23.8
SLB-C 1-9	393	628	368	603	141	115	28.3	24.2
SLB-C 1-10	411	700	386	675	177	141	35.4	31.3
SLB-C 1-11	429	718	404	693	177	141	35.8	31.7
SLB-C 1-12	447	736	422	711	177	141	36.1	32.0
SLB-C 1-13	465	754	440	729	177	141	36.5	32.4
SLB-C 1-15	517	812	492	787	177	141	41.3	37.2
SLB-C 1-17	553	848	528	823	177	141	42.0	37.9
SLB-C 1-19	589	884	-	-	177	141	44.6	-
SLB-C 1-21	625	920	-	-	177	141	45.3	-
SLB-C 1-23	661	956	-	-	177	141	46.1	-
SLB-C 1-25	697	992	-	-	177	141	46.8	-
SLB-C 1-27	737	1053	-	-	197	147	56.5	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø		3Ø			
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 1-2	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 1-3	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 1-4	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 1-5	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-
SLB-C 1-6	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-
SLB-C 1-7	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 1-8	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 1-9	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 1-10	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 1-11	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 1-12	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 1-13	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 1-15	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 1-17	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 1-19	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 1-21	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 1-23	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 1-25	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 1-27	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6

Performance Range

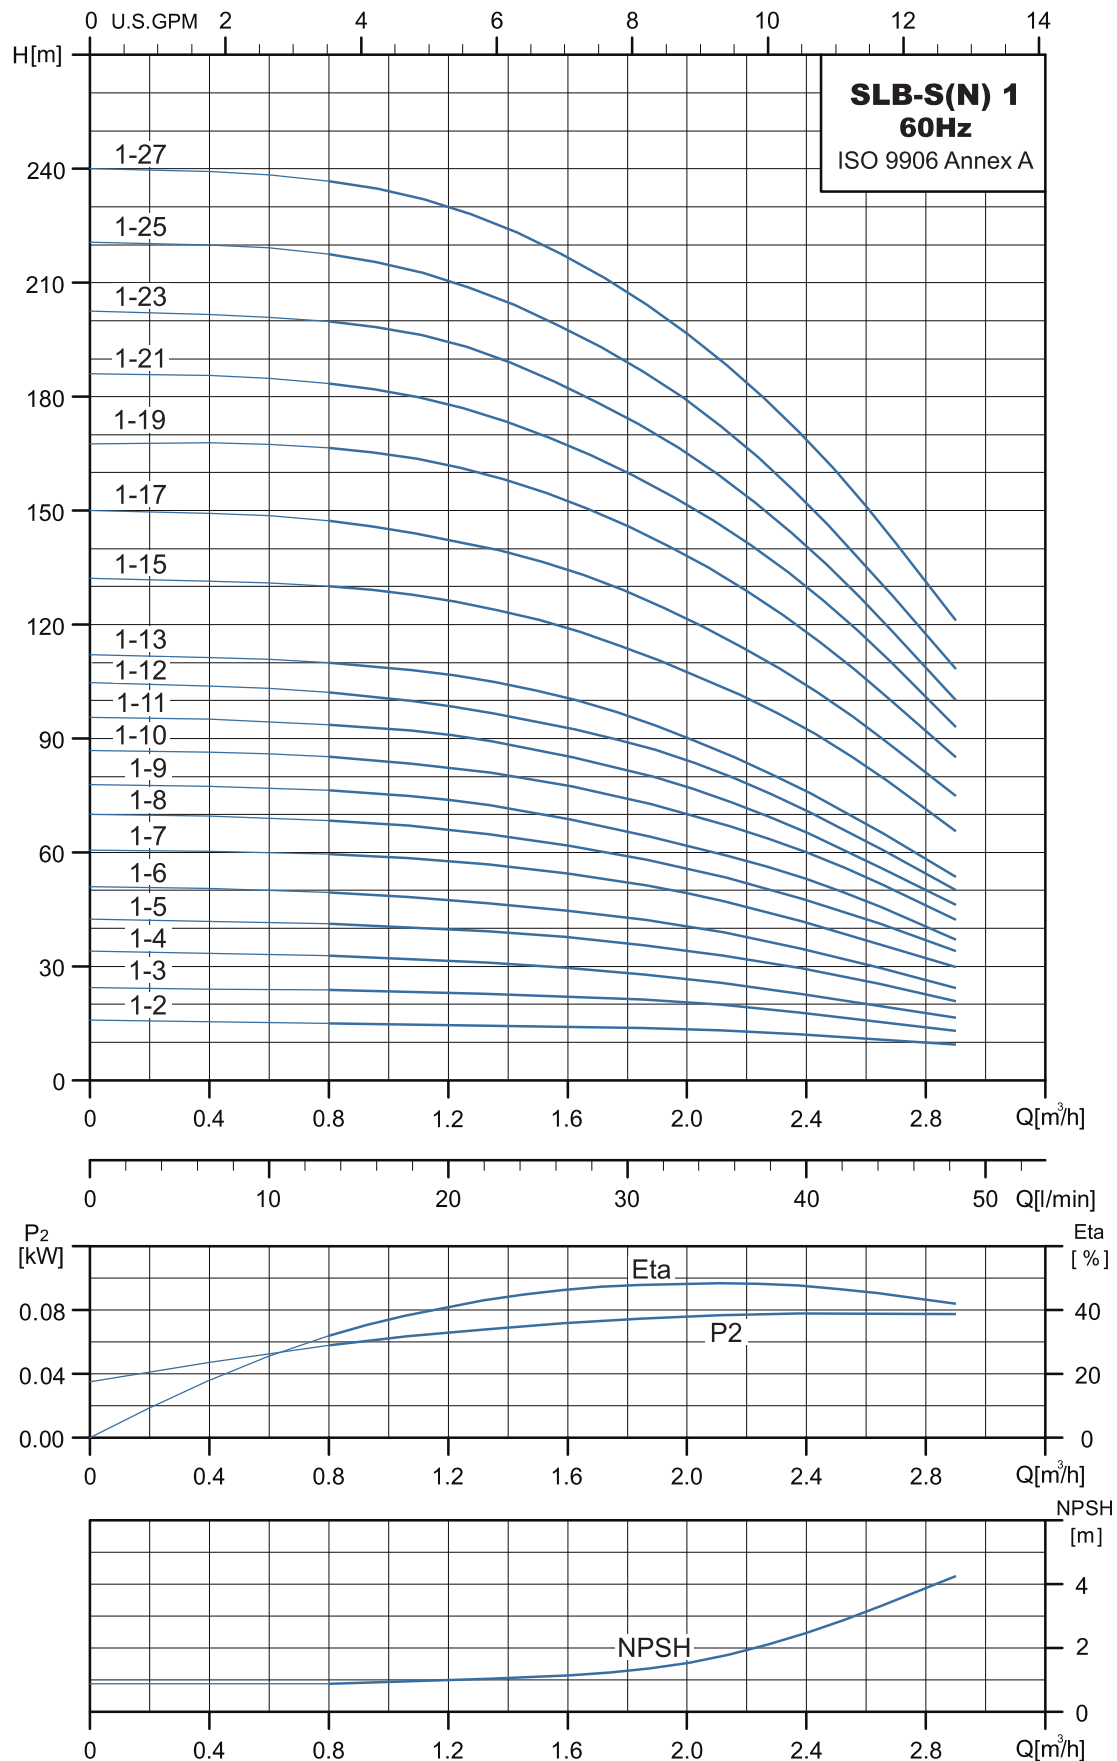


Dimensions and Weights

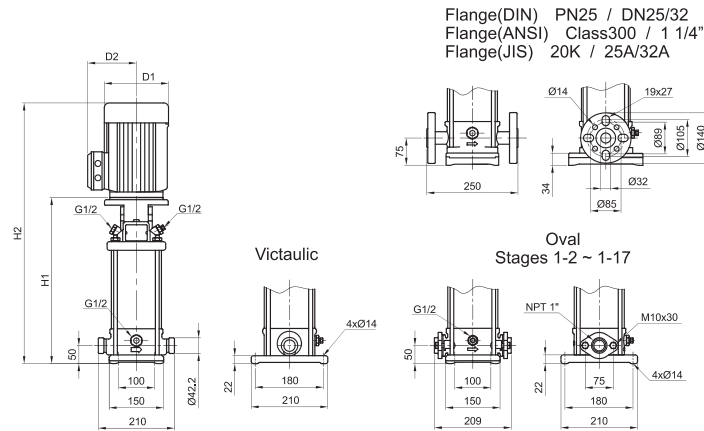


Pump Type	Dimension[mm]								Net Weight [kg]		
	Vactaulic		flange		OVAL		D1	D2	Vactaulic	flange	OVAL
	H1	H2	H1	H2	H1	H2					
SLB-S(N) 1-2	257	452	282	477	257	452	141	115	19.3	20.2	17.1
SLB-S(N) 1-3	257	452	282	477	257	452	141	115	19.3	20.3	17.1
SLB-S(N) 1-4	275	470	300	495	275	470	141	115	19.7	20.6	17.5
SLB-S(N) 1-5	293	488	318	513	293	488	141	115	20.6	21.5	18.4
SLB-S(N) 1-6	311	506	336	531	311	506	141	115	20.9	21.9	18.7
SLB-S(N) 1-7	335	570	360	595	335	570	141	115	23.3	24.2	21.1
SLB-S(N) 1-8	353	588	378	613	353	588	141	115	23.7	24.6	21.5
SLB-S(N) 1-9	371	606	396	631	371	606	141	115	24.0	25.0	21.9
SLB-S(N) 1-10	389	678	414	703	389	678	177	141	31.1	32.1	29.0
SLB-S(N) 1-11	407	696	432	721	407	696	177	141	31.5	32.5	29.4
SLB-S(N) 1-12	425	714	450	739	425	714	177	141	32.3	32.8	29.7
SLB-S(N) 1-13	443	732	468	757	443	732	177	141	37.1	33.2	30.1
SLB-S(N) 1-15	495	790	520	815	495	790	177	141	37.9	38.1	35.0
SLB-S(N) 1-17	531	826	556	851	531	826	177	141	36.9	38.8	35.7
SLB-S(N) 1-19	567	862	592	887	-	-	177	141	40.4	41.3	-
SLB-S(N) 1-21	603	898	628	923	-	-	177	141	41.2	42.1	-
SLB-S(N) 1-23	639	934	664	959	-	-	177	141	41.9	42.9	-
SLB-S(N) 1-25	675	970	700	995	-	-	177	141	42.6	43.6	-
SLB-S(N) 1-27	716	1032	741	1057	-	-	197	147	51.9	52.9	-

Pump Type	Motor		Nominal Current [A]						
	P2		1Ø		3Ø				
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V	
SLB-S(N) 1-2	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-	
SLB-S(N) 1-3	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-	
SLB-S(N) 1-4	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-	
SLB-S(N) 1-5	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-	
SLB-S(N) 1-6	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-	
SLB-S(N) 1-7	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-	
SLB-S(N) 1-8	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-	
SLB-S(N) 1-9	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-	
SLB-S(N) 1-10	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 1-11	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 1-12	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 1-13	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 1-15	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1	
SLB-S(N) 1-17	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1	
SLB-S(N) 1-19	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 1-21	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 1-23	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 1-25	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 1-27	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	

Performance Range

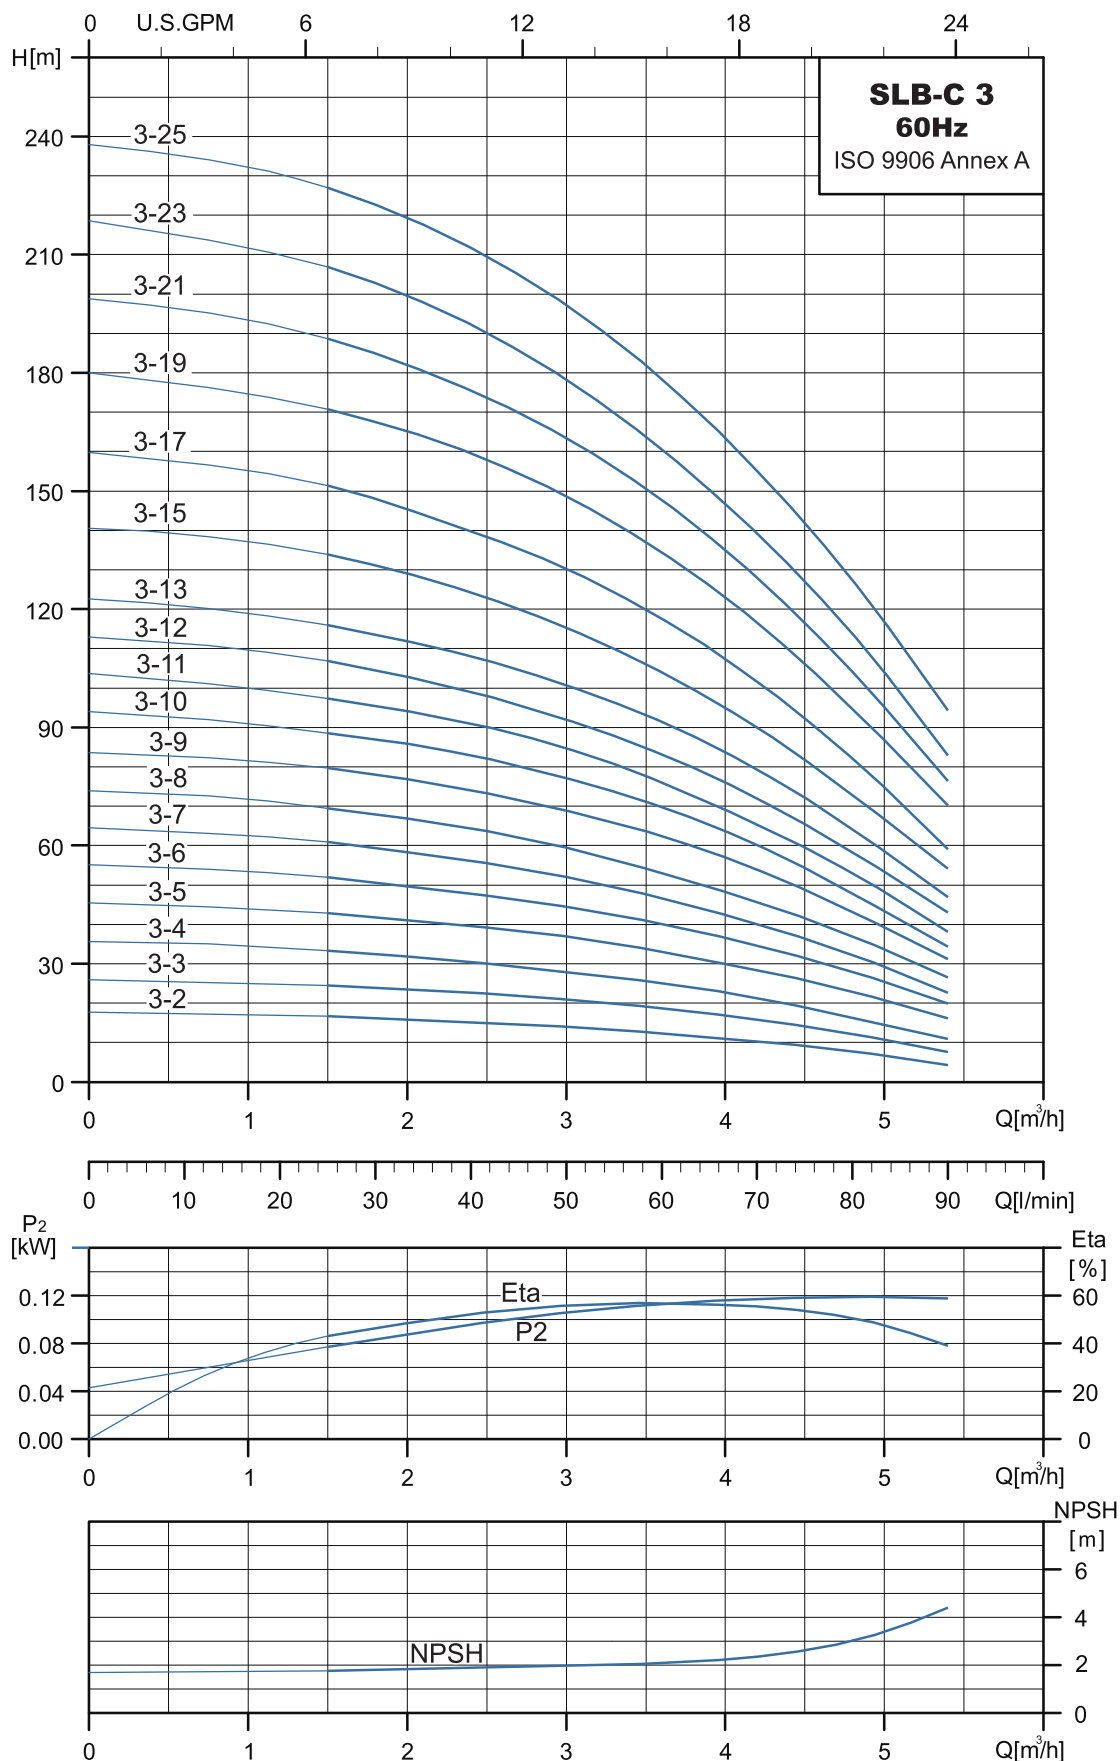


Dimensions and Weights

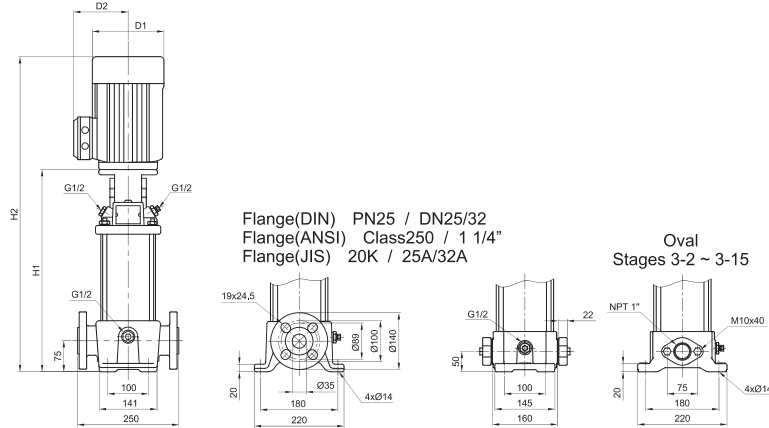


Pump Type	Dimension[mm]						Net Weight [kg]	
	flange		OVAL		D1	D2	flange	OVAL
	H1	H2	H1	H2				
SLB-C 3-2	279	474	254	449	141	115	23.4	19.3
SLB-C 3-3	279	474	254	449	141	115	23.9	19.8
SLB-C 3-4	297	492	272	467	141	115	24.3	20.2
SLB-C 3-5	321	556	296	531	141	115	26.8	22.7
SLB-C 3-6	339	628	314	603	177	141	33.9	29.8
SLB-C 3-7	357	646	332	621	177	141	34.3	30.2
SLB-C 3-8	375	664	350	639	177	141	34.6	30.5
SLB-C 3-9	409	704	384	679	177	141	39.1	35.0
SLB-C 3-10	427	722	402	697	177	141	39.5	35.4
SLB-C 3-11	445	740	420	715	177	141	39.9	35.8
SLB-C 3-12	463	758	438	733	177	141	42.0	37.9
SLB-C 3-13	481	776	456	751	177	141	42.4	38.3
SLB-C 3-15	517	812	492	787	177	141	43.1	39.0
SLB-C 3-17	553	848	-	-	177	141	43.8	-
SLB-C 3-19	593	909	-	-	197	147	53.5	-
SLB-C 3-21	629	945	-	-	197	147	53.9	-
SLB-C 3-23	665	981	-	-	197	147	55.0	-
SLB-C 3-25	701	1027	-	-	220	161	59.7	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø		3Ø			
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 3-2	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 3-3	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 3-4	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.0 - 1.0	-	-
SLB-C 3-5	0.37	0.5	6.2 / 3.1	-	1.7 - 1.7	1.7 - 1.7	-	-
SLB-C 3-6	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-
SLB-C 3-7	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-
SLB-C 3-8	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 3-9	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 3-10	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 3-11	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 3-12	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 3-13	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 3-15	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 3-17	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 3-19	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 3-21	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 3-23	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 3-25	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2


Performance Range

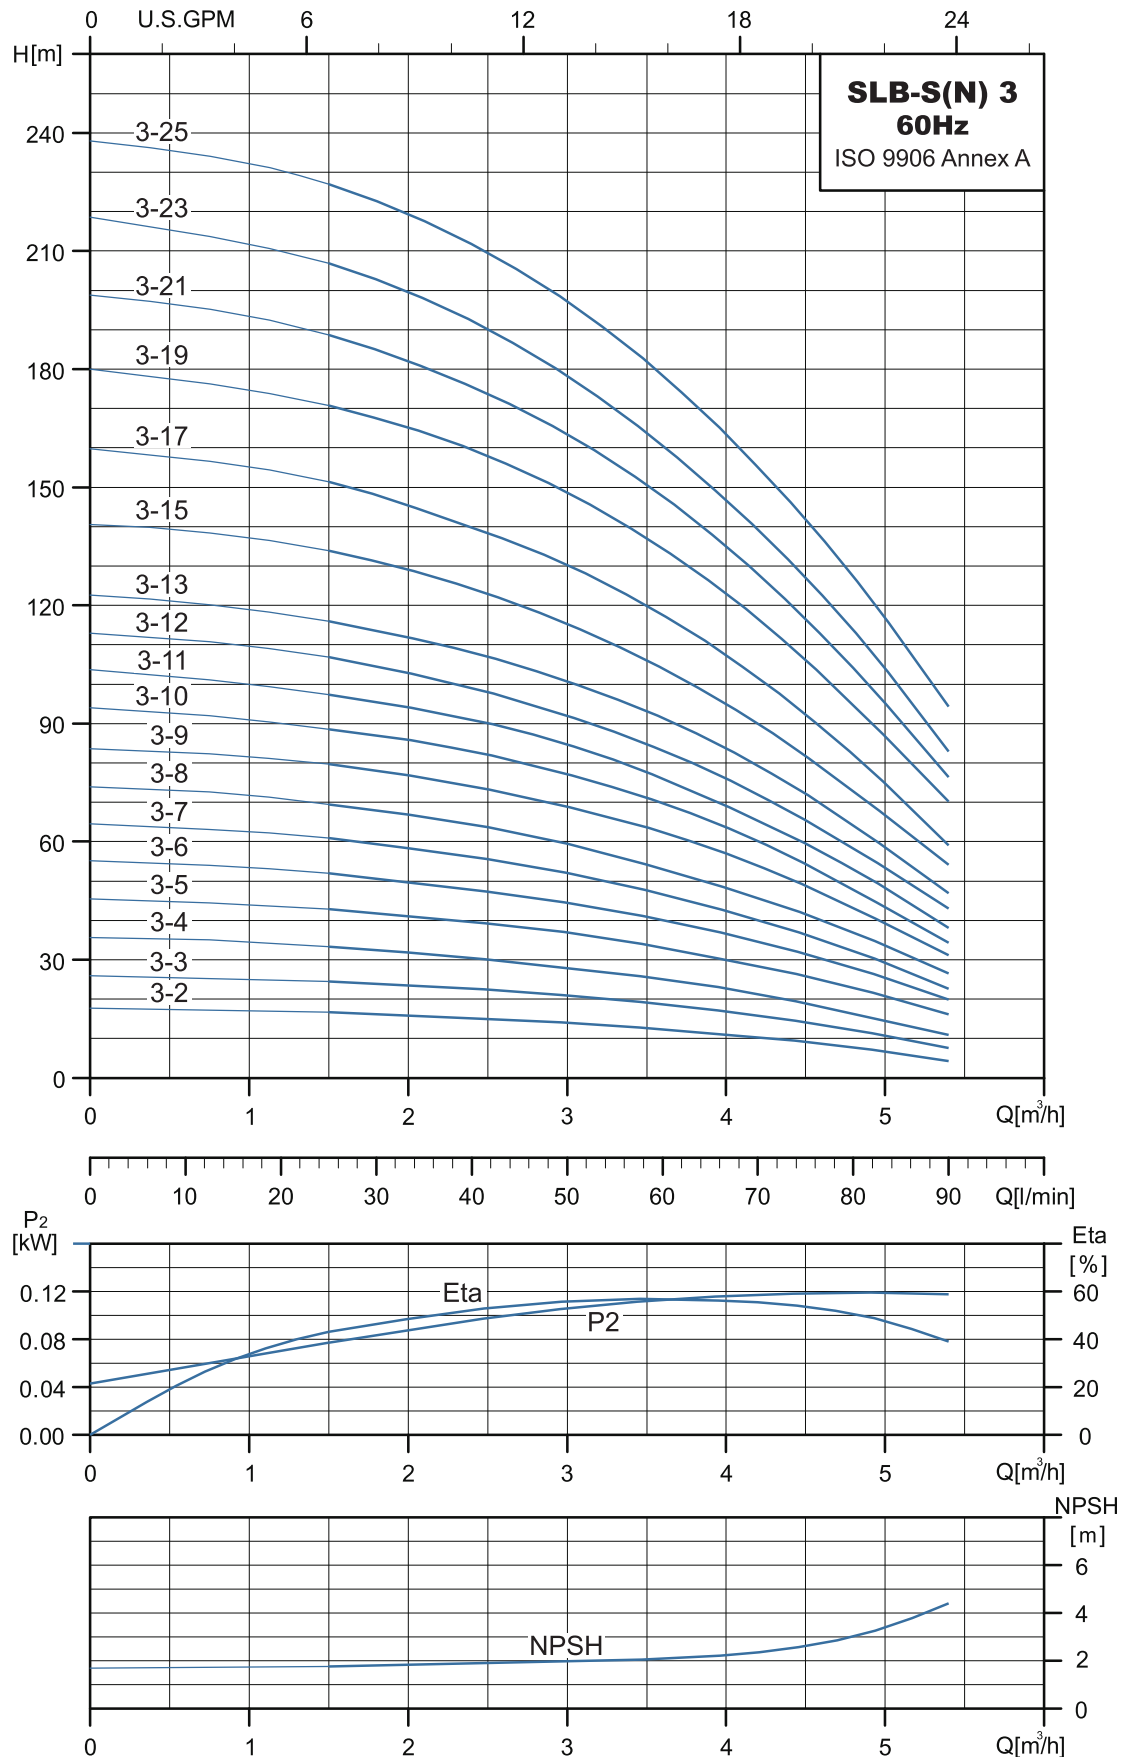

Performance Range

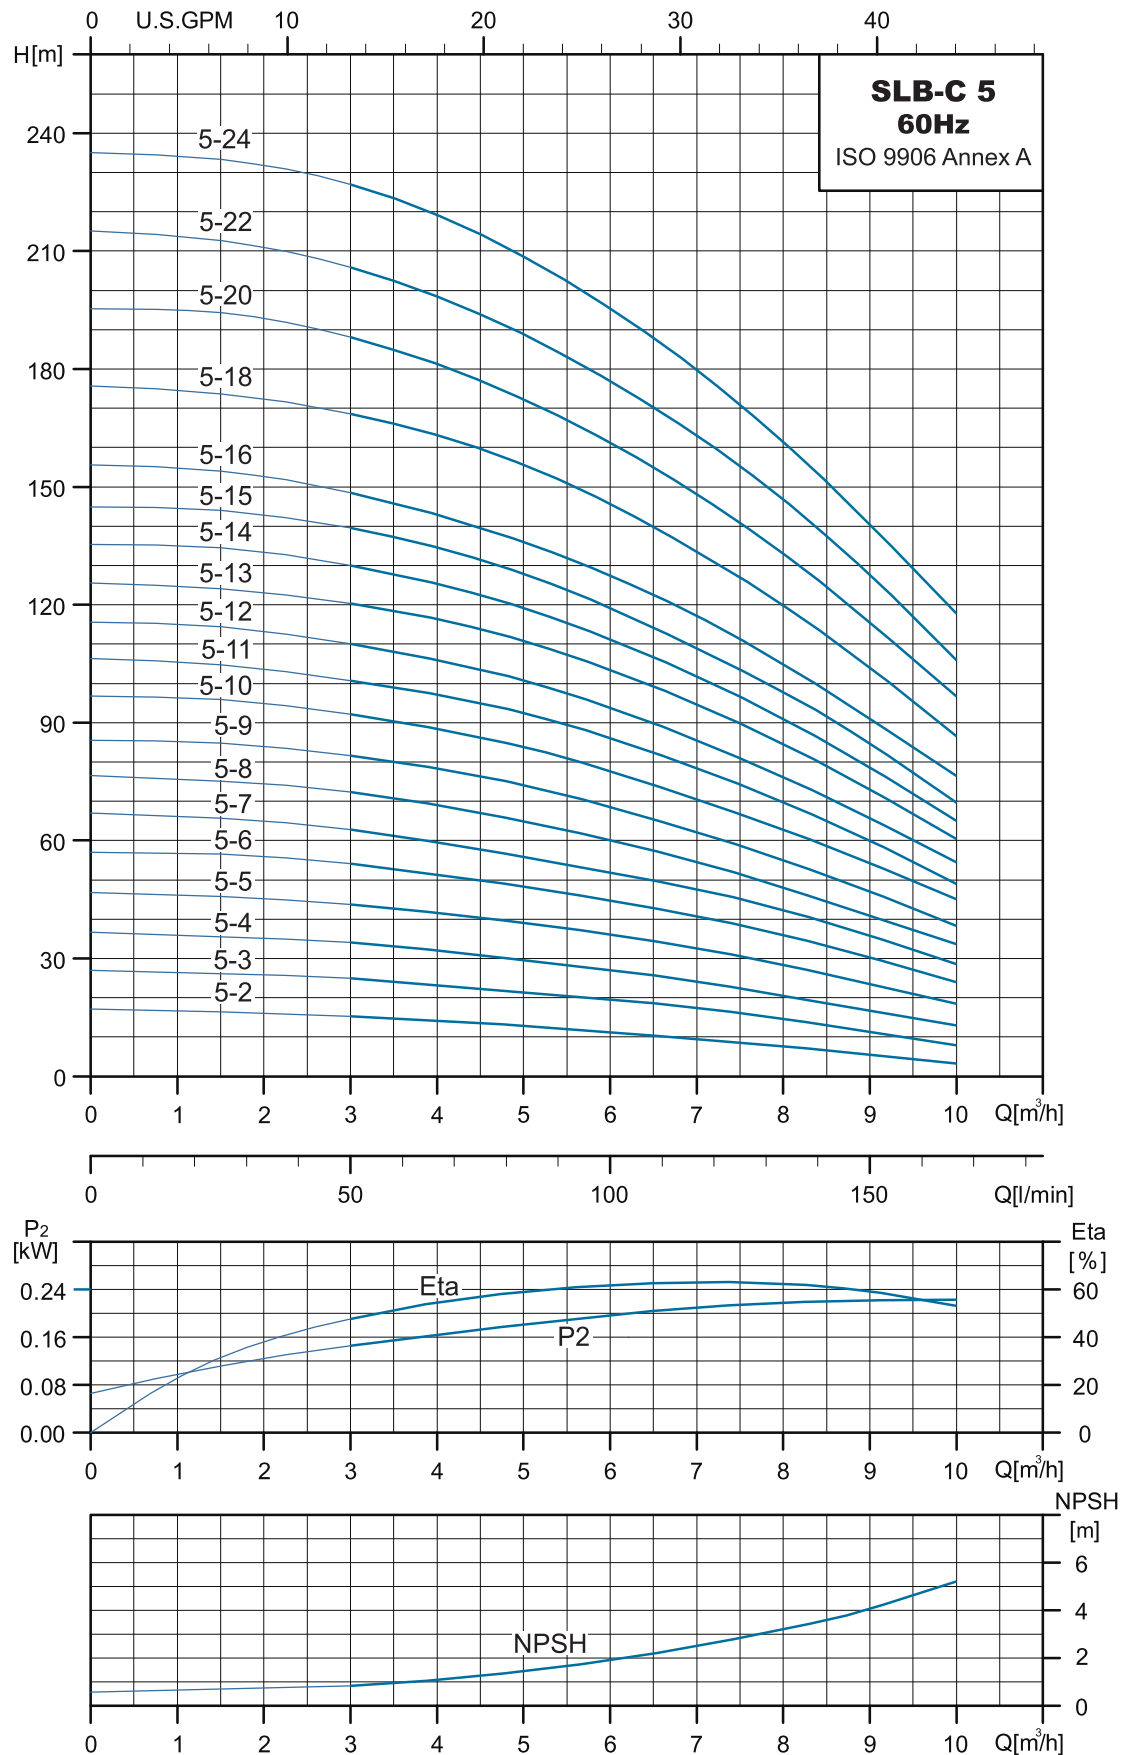


Dimensions and Weights

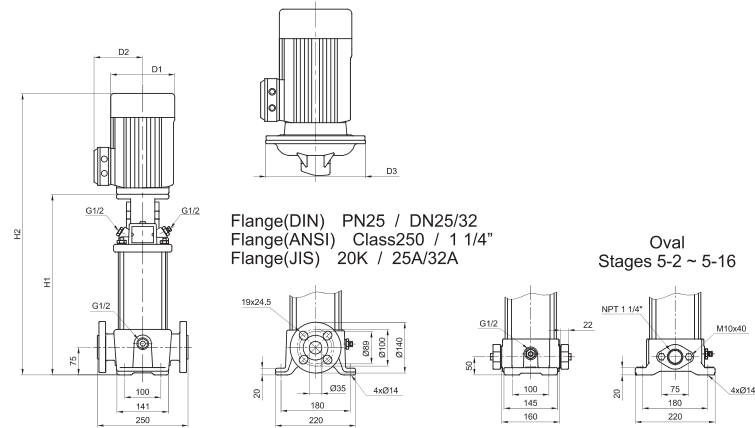


Pump Type	Dimension[mm]							Net Weight [kg]	
	flange		OVAL		D1	D2	D3	flange	OVAL
	H1	H2	H1	H2					
SLB-C 5-2	279	474	254	449	141	115	-	23.8	19.5
SLB-C 5-3	312	601	287	576	177	141	-	33.1	28.8
SLB-C 5-4	339	628	314	603	177	141	-	33.6	29.3
SLB-C 5-5	382	677	357	652	177	141	-	38.2	33.9
SLB-C 5-6	409	704	384	679	177	141	-	40.6	36.3
SLB-C 5-7	436	731	411	706	177	141	-	41.1	36.8
SLB-C 5-8	463	758	438	733	177	141	-	41.6	37.3
SLB-C 5-9	490	785	465	760	177	141	-	42.1	37.8
SLB-C 5-10	521	837	496	812	197	147	-	51.6	47.3
SLB-C 5-11	548	864	523	839	197	147	-	52.1	47.8
SLB-C 5-12	575	891	550	866	197	147	-	52.6	48.3
SLB-C 5-13	602	928	577	903	220	161	-	57.1	52.8
SLB-C 5-14	629	955	604	930	220	161	-	57.7	53.4
SLB-C 5-15	656	982	631	957	220	161	-	58.1	53.8
SLB-C 5-16	683	1009	658	984	220	161	-	58.7	54.4
SLB-C 5-18	767	1129	-	-	235	197	300	80.6	-
SLB-C 5-20	821	1183	-	-	235	197	300	81.8	-
SLB-C 5-22	875	1237	-	-	235	197	300	82.7	-
SLB-C 5-24	929	1334	-	-	235	197	300	89.6	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø		3Ø			
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 5-2	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-
SLB-C 5-3	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 5-4	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-
SLB-C 5-5	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 5-6	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 5-7	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 5-8	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 5-9	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 5-10	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 5-11	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 5-12	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 5-13	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 5-14	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 5-15	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 5-16	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 5-18	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 5-20	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 5-22	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 5-24	7.5	10	-	-	-	-	25.4 - 22.1	14.7 - 12.8

Performance Range

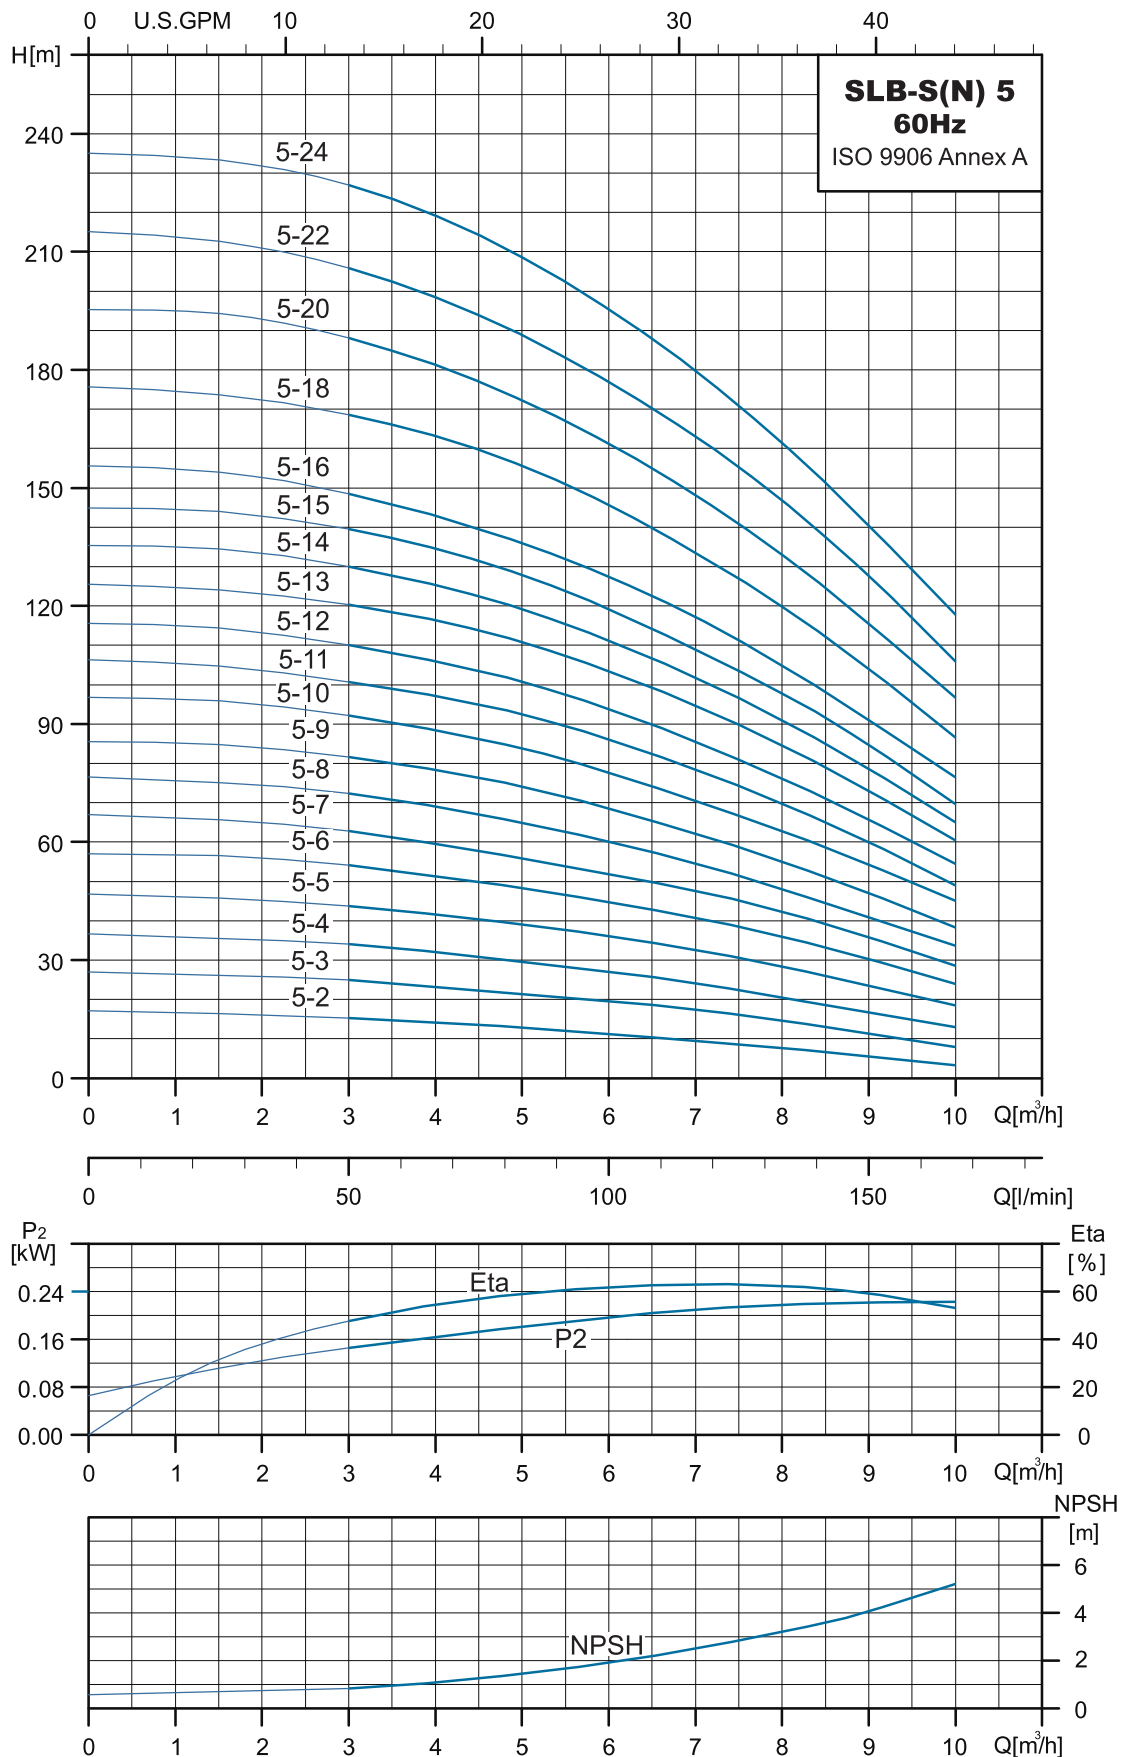


Dimensions and Weights

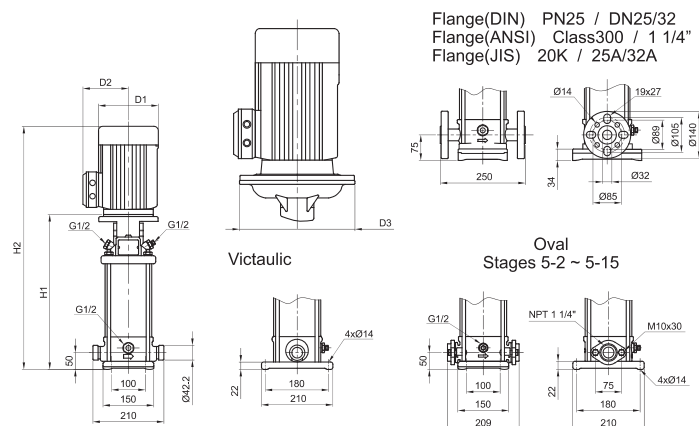


Pump Type	Dimension[mm]									Net Weight [kg]		
	Vactaolic		flange		OVAL		D1	D2	D3	Vactaolic	flange	OVAL
	H1	H2	H1	H2	H1	H2						
SLB-S(N) 5-2	257	452	282	477	257	452	141	115	-	19.7	20.6	17.4
SLB-S(N) 5-3	290	579	315	604	290	579	177	141	-	29.0	30.0	26.8
SLB-S(N) 5-4	317	606	342	631	317	606	177	141	-	29.6	30.5	27.3
SLB-S(N) 5-5	360	655	385	680	360	655	177	141	-	34.3	35.3	32.1
SLB-S(N) 5-6	387	682	412	707	387	682	177	141	-	36.6	37.6	34.4
SLB-S(N) 5-7	414	709	439	734	414	709	177	141	-	37.1	38.1	34.9
SLB-S(N) 5-8	441	736	466	761	441	736	177	141	-	37.7	38.6	35.4
SLB-S(N) 5-9	468	763	493	788	468	763	177	141	-	38.2	39.2	35.9
SLB-S(N) 5-10	500	816	525	841	500	816	197	147	-	47.4	48.3	45.1
SLB-S(N) 5-11	527	843	552	868	527	843	197	147	-	47.9	48.8	45.6
SLB-S(N) 5-12	554	870	579	895	554	870	197	147	-	48.4	49.4	46.2
SLB-S(N) 5-13	581	907	606	932	581	907	220	161	-	53.0	53.9	50.7
SLB-S(N) 5-14	608	934	633	959	608	934	220	161	-	53.5	54.5	51.3
SLB-S(N) 5-15	635	961	660	986	635	961	220	161	-	54.1	55.0	51.8
SLB-S(N) 5-16	662	988	687	1013	662	988	220	161	-	54.6	55.6	52.4
SLB-S(N) 5-18	745	1107	770	1132	-	-	235	197	300	76.5	77.5	-
SLB-S(N) 5-20	799	1161	824	1186	-	-	235	197	300	77.8	78.7	-
SLB-S(N) 5-22	853	1215	878	1240	-	-	235	197	300	78.6	79.6	-
SLB-S(N) 5-24	907	1312	932	1337	-	-	235	197	300	85.6	86.5	-

Pump Type	Motor		Nominal Current [A]						
	P2		1Ø		3Ø				
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V	
SLB-S(N) 5-2	0.55	0.75	8.0 / 4.0	-	2.4 - 2.4	1.4 - 1.4	-	-	
SLB-S(N) 5-3	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 5-4	1.1	1.5	-	7.6 - 8.9	4.0 - 3.5	2.3 - 2.0	-	-	
SLB-S(N) 5-5	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1	
SLB-S(N) 5-6	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 5-7	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 5-8	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 5-9	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 5-10	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 5-11	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 5-12	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 5-13	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 5-14	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 5-15	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 5-16	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 5-18	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 5-20	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 5-22	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 5-24	7.5	10	-	-	-	-	25.4 - 22.1	14.7 - 12.8	

Performance Range

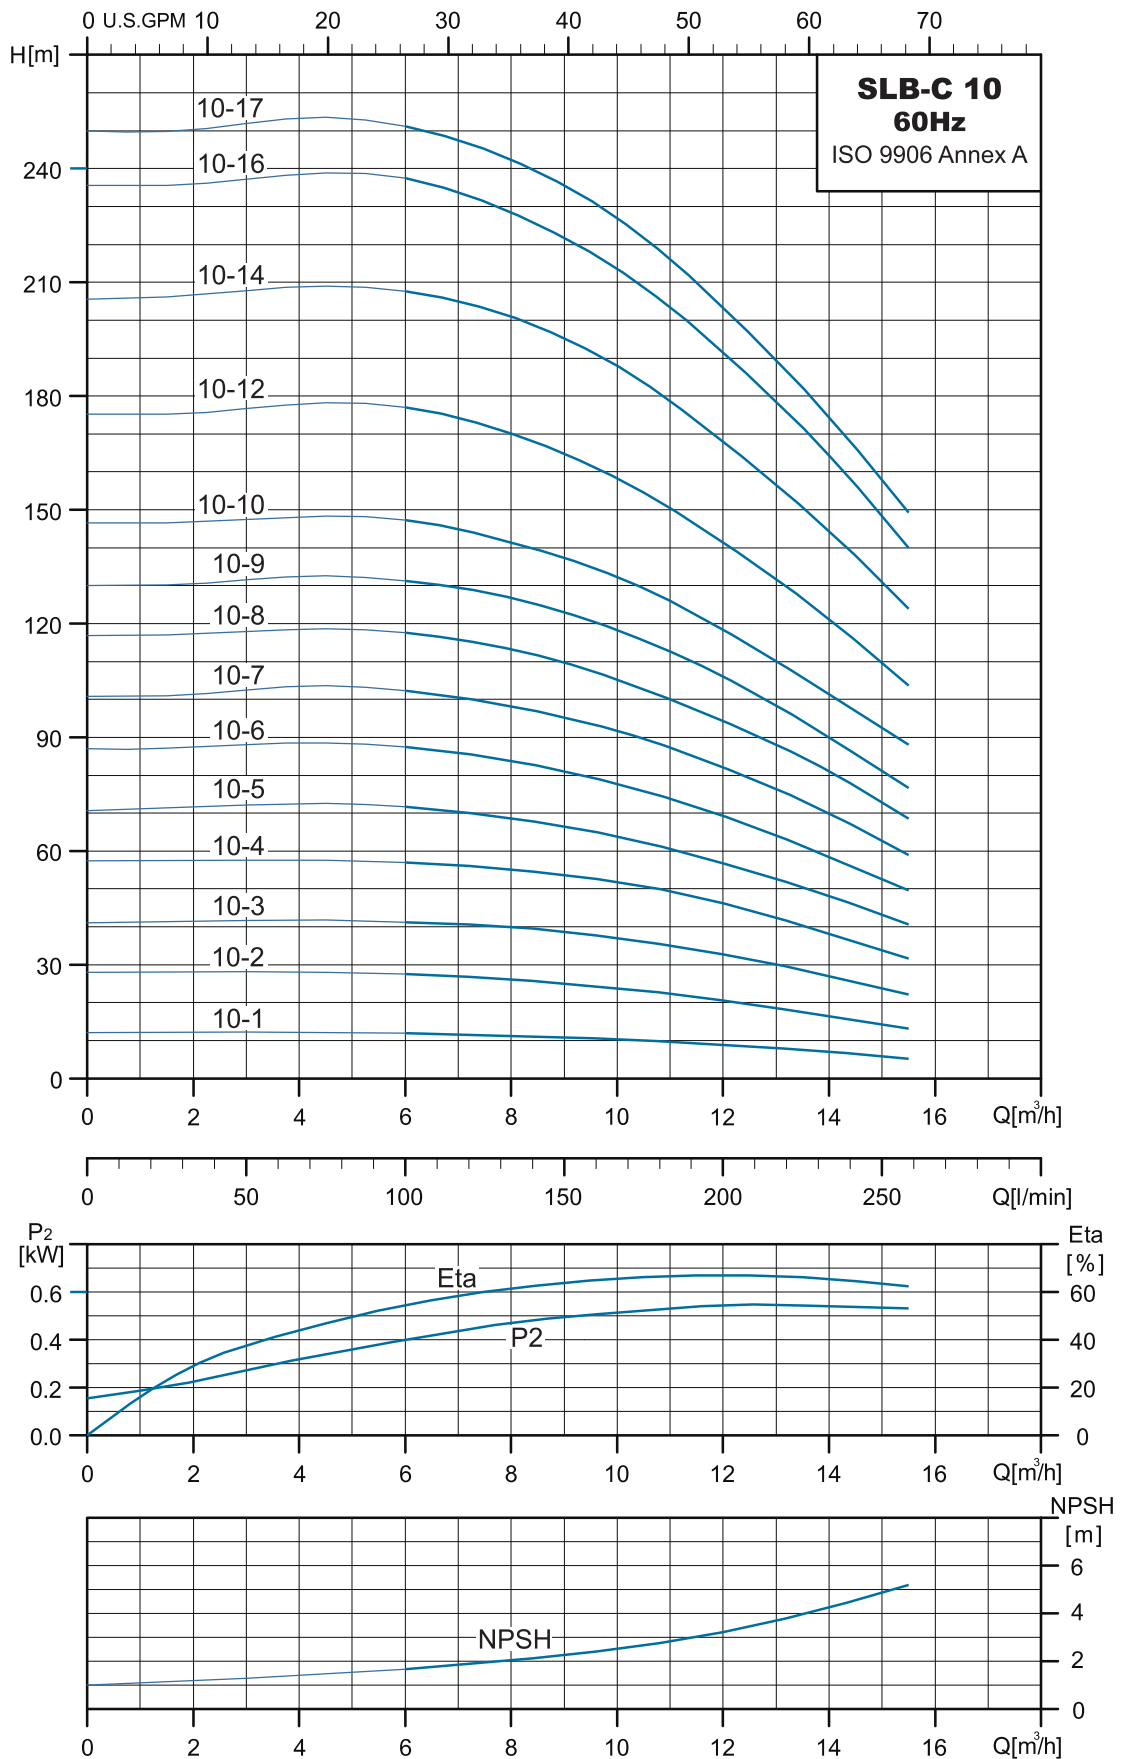


Dimensions and Weights

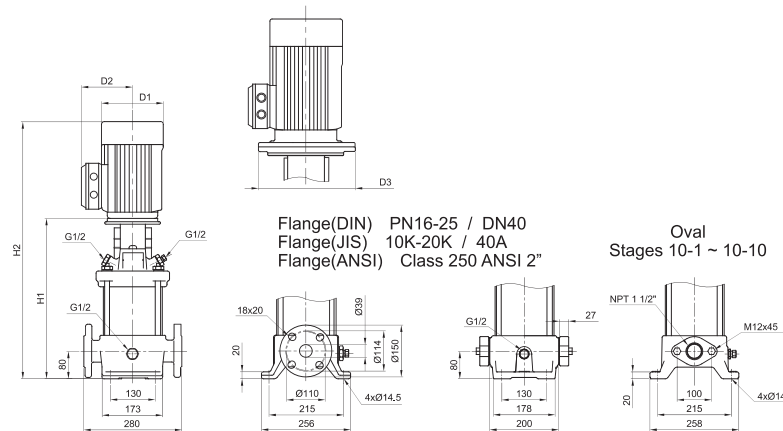


Pump Type	Dimension[mm]							Net Weight [kg]	
	flange		OVAL		D1	D2	D3	flange	OVAL
	H1	H2	H1	H2					
SLB-C 10-1	347	582	347	582	141	115	-	38.0	34.6
SLB-C 10-2	363	658	363	658	177	141	-	49.0	45.6
SLB-C 10-3	393	688	393	688	177	141	-	51.9	48.5
SLB-C 10-4	428	744	428	744	197	147	-	62.1	58.7
SLB-C 10-5	458	774	458	774	197	147	-	63.1	59.7
SLB-C 10-6	488	814	488	814	220	161	-	68.2	64.8
SLB-C 10-7	550	912	550	912	235	197	300	96.1	92.7
SLB-C 10-8	580	942	580	942	235	197	300	97.2	93.8
SLB-C 10-9	610	972	610	972	235	197	300	98.2	94.8
SLB-C 10-10	640	1045	640	1045	235	197	300	105.2	101.8
SLB-C 10-12	700	1105	-	-	235	197	300	107.2	-
SLB-C 10-14	837	1282	-	-	269	215	350	140.5	-
SLB-C 10-16	897	1342	-	-	269	215	350	142.6	-
SLB-C 10-17	927	1372	-	-	269	215	350	143.7	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø		3Ø			
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 10-1	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-
SLB-C 10-2	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 10-3	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2
SLB-C 10-4	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 10-5	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 10-6	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 10-7	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 10-8	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 10-9	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 10-10	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8
SLB-C 10-12	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8
SLB-C 10-14	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 10-16	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 10-17	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6

Performance Range

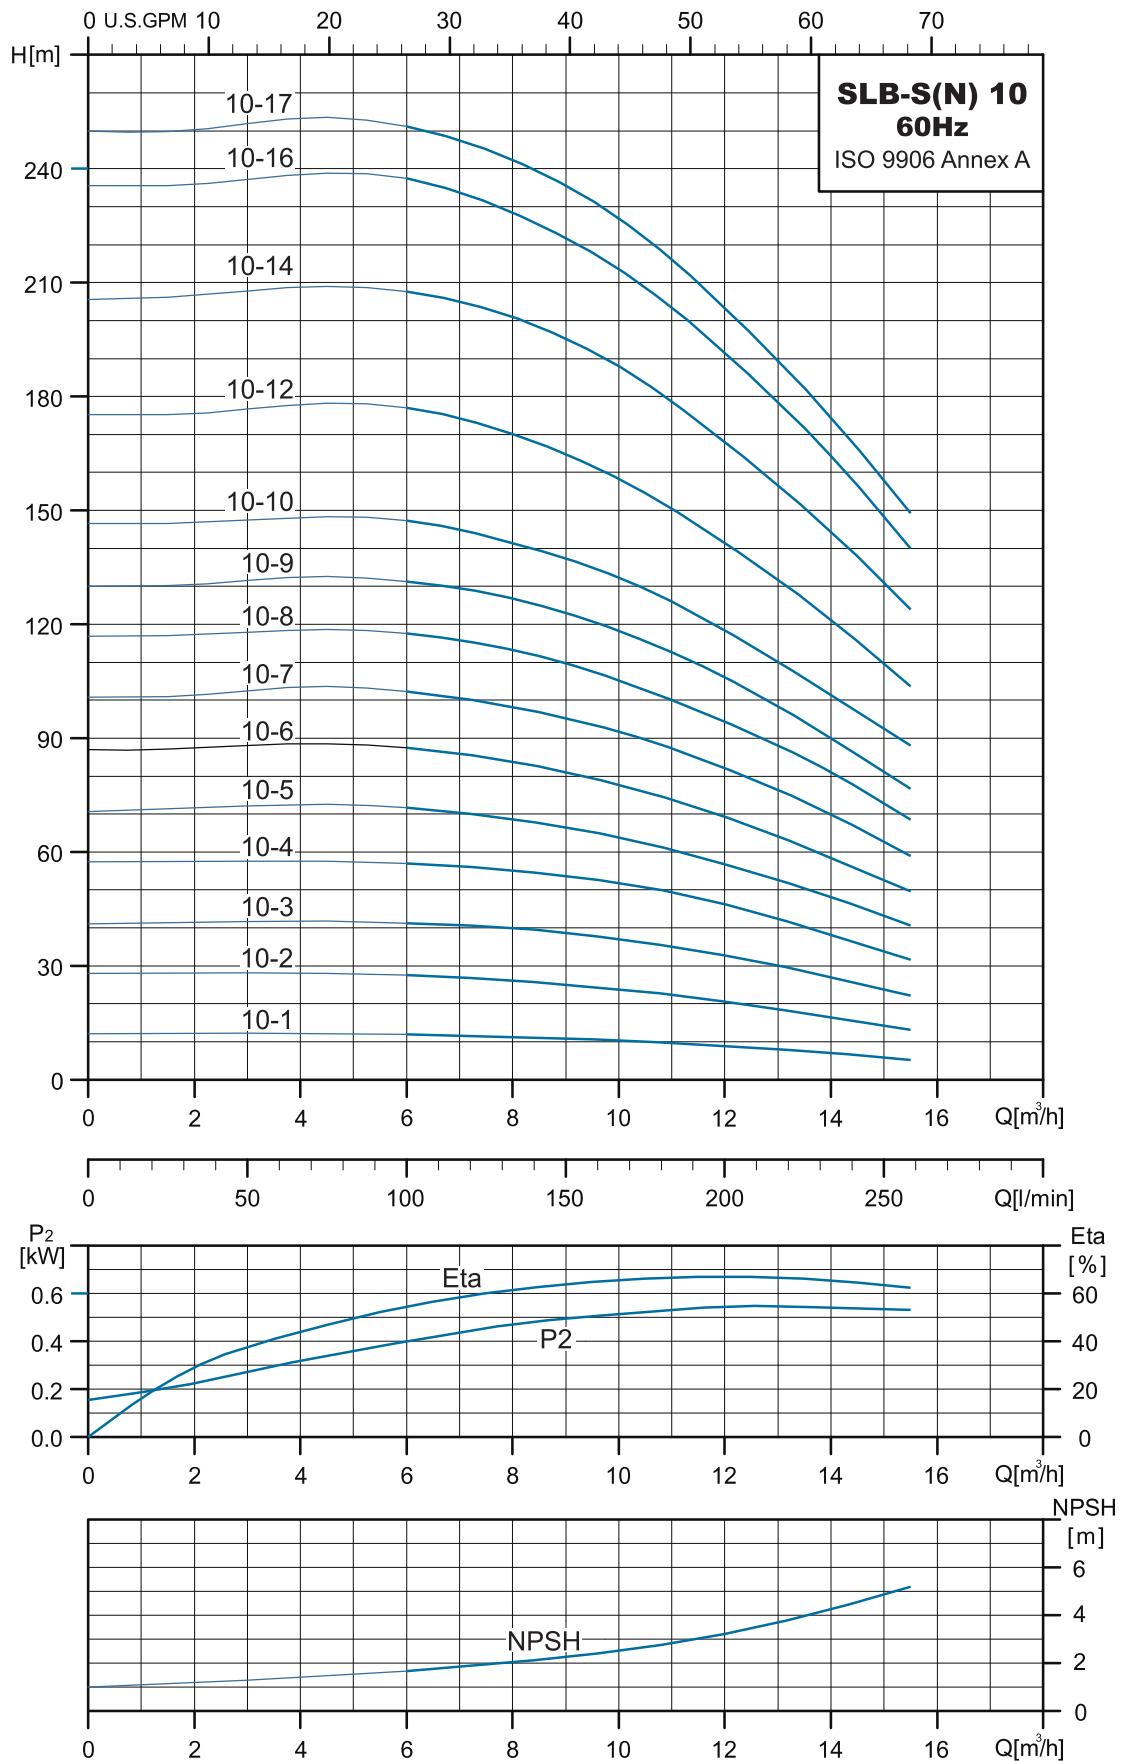


Dimensions and Weights

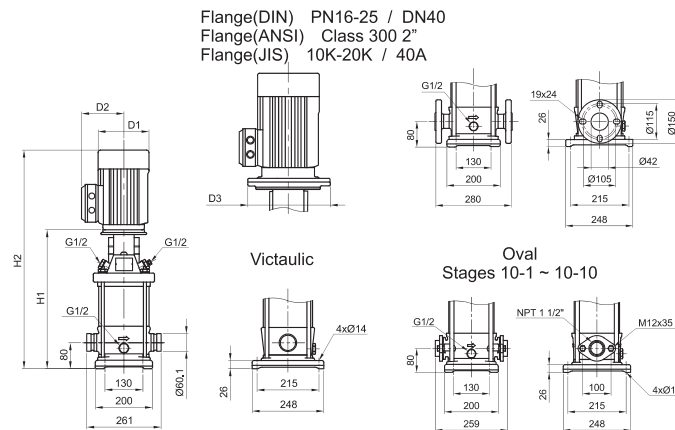


Pump Type	Dimension[mm]									Net Weight [kg]		
	Vactaulic		flange		OVAL		D1	D2	D3	Vactaulic	flange	OVAL
	H1	H2	H1	H2	H1	H2						
SLB-S(N) 10-1	357	592	357	592	357	592	141	115	-	34.1	34.0	32.5
SLB-S(N) 10-2	373	668	373	668	373	668	177	141	-	45.1	45.0	43.5
SLB-S(N) 10-3	403	698	403	698	403	698	177	141	-	47.9	47.8	46.3
SLB-S(N) 10-4	438	754	438	754	438	754	197	147	-	57.3	57.2	55.7
SLB-S(N) 10-5	468	784	468	784	468	784	197	147	-	58.4	58.2	56.7
SLB-S(N) 10-6	498	824	498	824	498	824	220	161	-	63.4	63.3	61.8
SLB-S(N) 10-7	560	922	560	922	560	922	235	197	300	92.5	92.4	90.9
SLB-S(N) 10-8	590	952	590	952	590	952	235	197	300	93.6	93.4	91.9
SLB-S(N) 10-9	620	982	620	982	620	982	235	197	300	94.6	94.4	92.9
SLB-S(N) 10-10	650	1055	650	1055	650	1055	235	197	300	101.5	101.4	99.9
SLB-S(N) 10-12	710	1115	710	1115	-	-	235	197	300	103.6	103.4	-
SLB-S(N) 10-14	847	1292	847	1292	-	-	269	215	350	137.2	137.0	-
SLB-S(N) 10-16	907	1352	907	1352	-	-	269	215	350	139.2	139.1	-
SLB-S(N) 10-17	937	1382	937	1382	-	-	269	215	350	140.4	140.2	-

Pump Type	Motor		Nominal Current [A]						
	P2		1Ø		3Ø				
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V	
SLB-S(N) 10-1	0.75	1.0	10.4 / 5.2	-	3.1 - 3.1	1.8 - 1.8	-	-	
SLB-S(N) 10-2	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1	
SLB-S(N) 10-3	2.2	3.0	-	13.8 - 12.5	-	-	8.1 - 7.2	4.7 - 4.2	
SLB-S(N) 10-4	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 10-5	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 10-6	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 10-7	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 10-8	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 10-9	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 10-10	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8	
SLB-S(N) 10-12	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8	
SLB-S(N) 10-14	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	
SLB-S(N) 10-16	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	
SLB-S(N) 10-17	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	

Performance Range

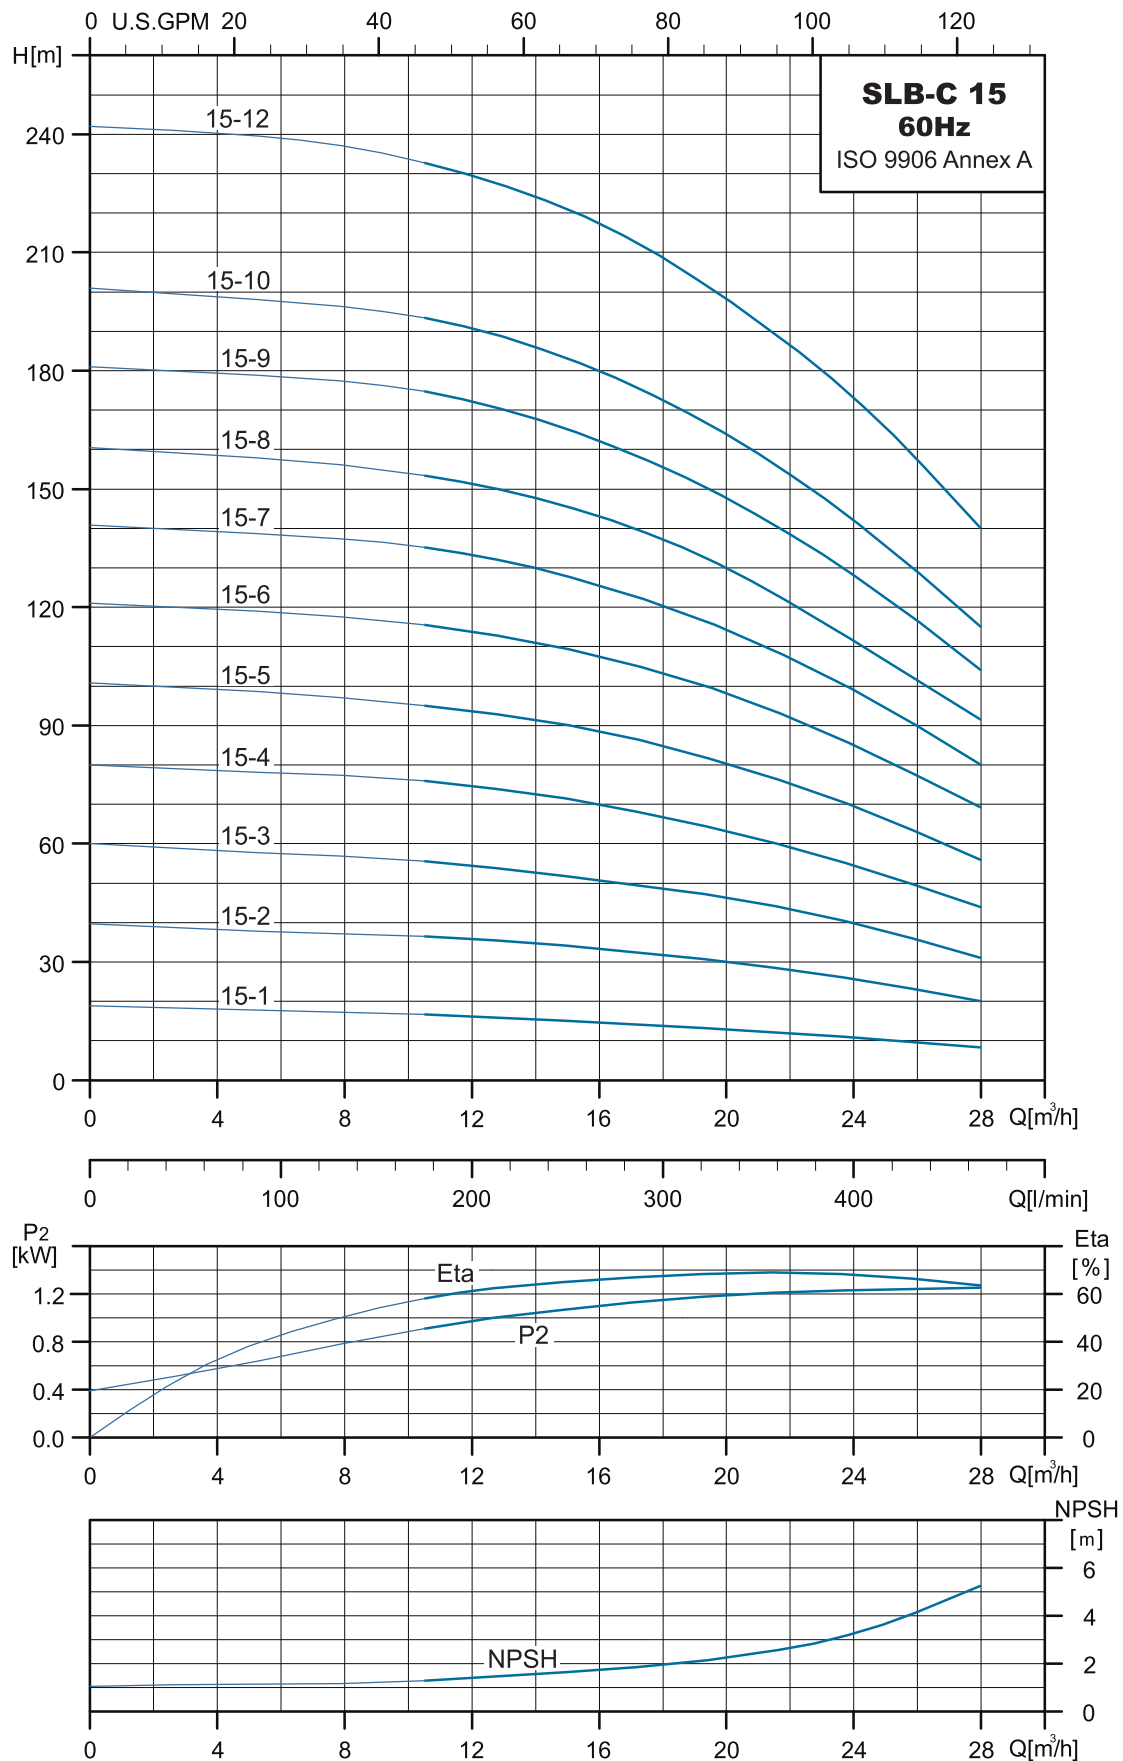


Dimensions and Weights

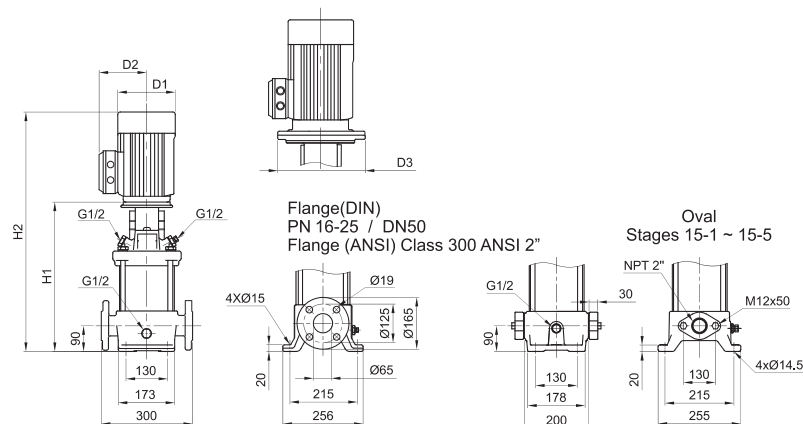


Pump Type	Dimension[mm]							Net Weight [kg]	
	flange		OVAL		D1	D2	D3	flange	OVAL
	H1	H2	H1	H2					
SLB-C 15-1	415	710	415	710	177	141	-	53.6	52.0
SLB-C 15-2	420	736	420	736	197	147	-	64.9	63.3
SLB-C 15-3	465	791	465	791	220	161	-	70.3	68.7
SLB-C 15-4	542	904	542	904	235	197	300	98.7	97.1
SLB-C 15-5	587	992	587	992	235	197	300	106.0	104.4
SLB-C 15-6	709	1154	-	-	269	215	350	138.7	-
SLB-C 15-7	754	1199	-	-	269	215	350	140.2	-
SLB-C 15-8	799	1244	-	-	269	215	350	141.6	-
SLB-C 15-9	844	1334	-	-	269	215	350	153.7	-
SLB-C 15-10	889	1379	-	-	269	215	350	155.2	-
SLB-C 15-12	979	1519	-	-	318	241	350	192.0	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø			3Ø		
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 15-1	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 15-2	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6
SLB-C 15-3	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 15-4	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 15-5	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8
SLB-C 15-6	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 15-7	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 15-8	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 15-9	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-C 15-10	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-C 15-12	18.5	25.0	-	-	-	-	59.7 - 49.3	34.5 - 28.5

Performance Range

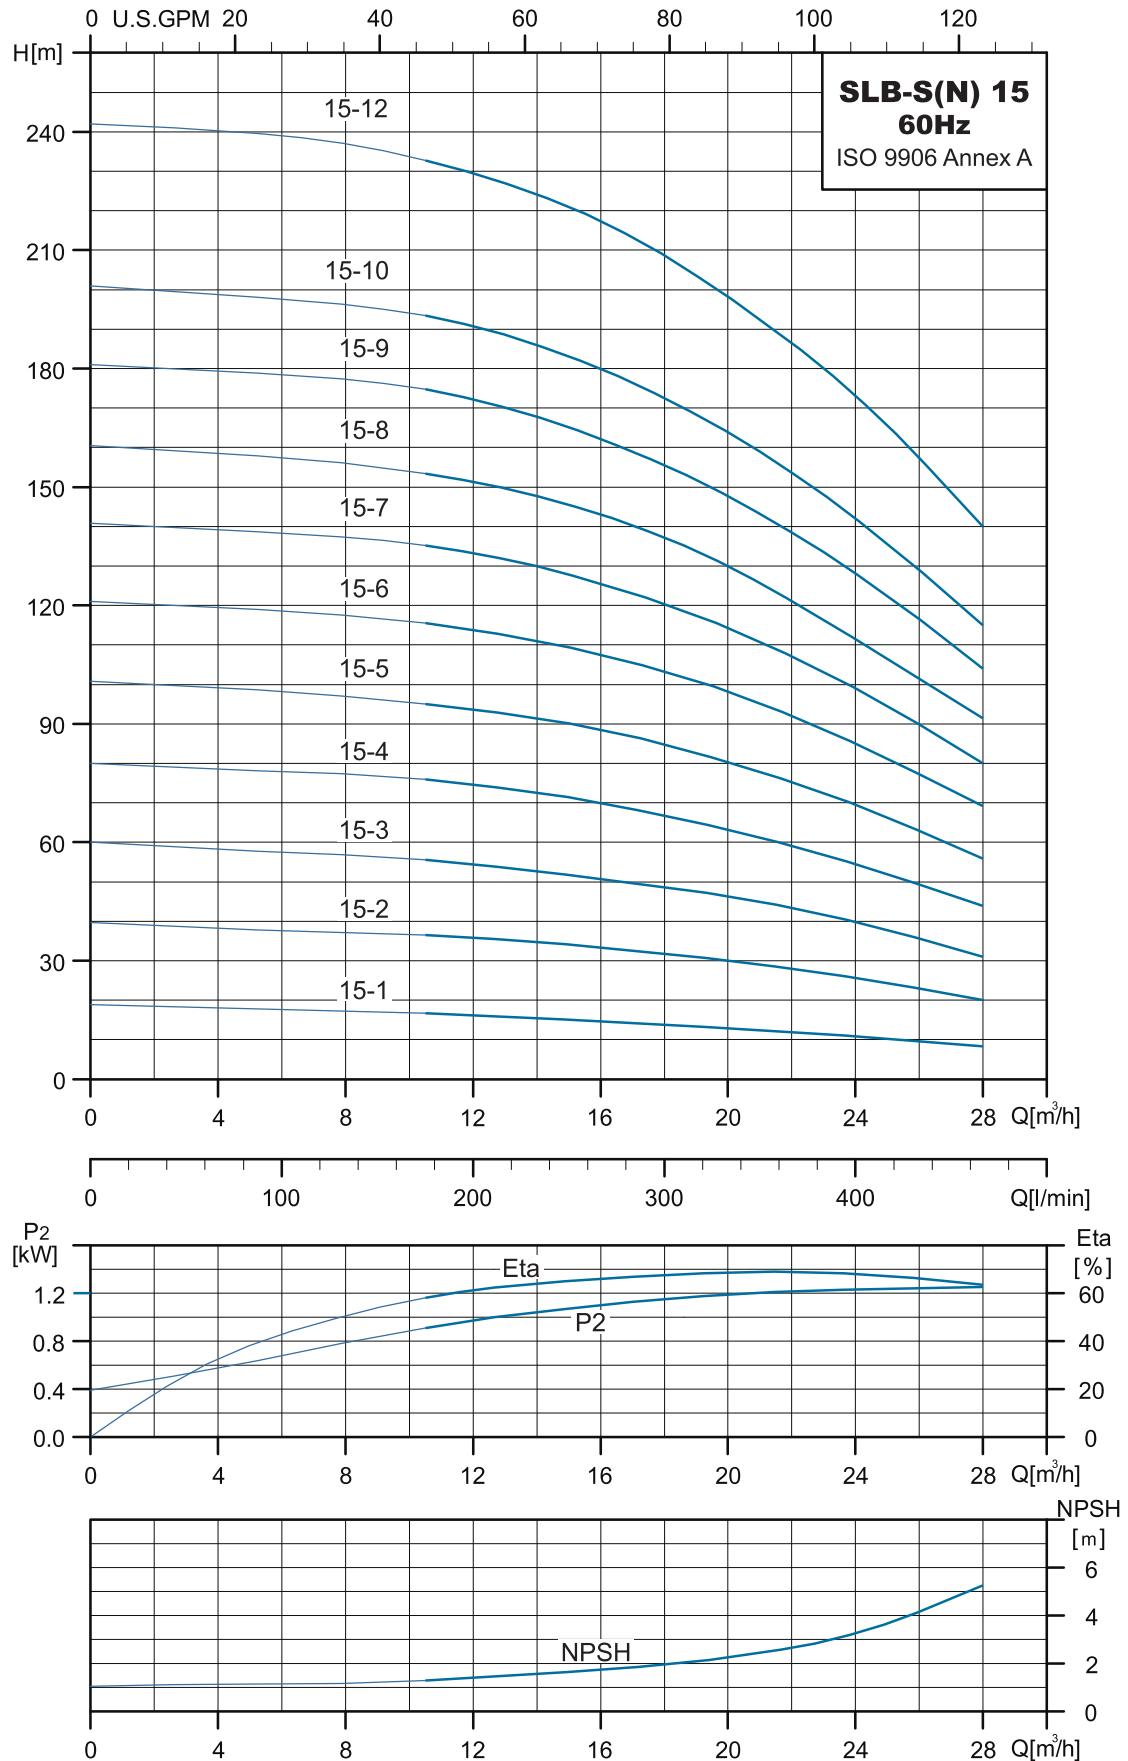


Dimensions and Weights

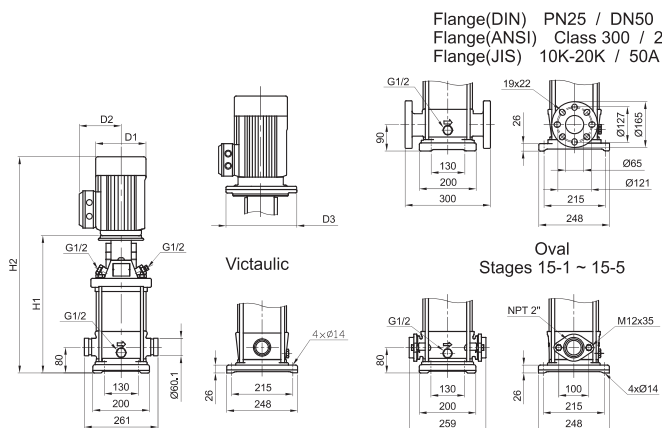


Pump Type	Dimension[mm]									Net Weight [kg]		
	Vactaulic		flange		OVAL		D1	D2	D3	Vactaulic	flange	OVAL
	H1	H2	H1	H2	H1	H2						
SLB-S(N) 15-1	403	698	413	708	403	698	177	141	-	45.6	46.3	42.7
SLB-S(N) 15-2	408	724	418	734	408	724	197	147	-	56.1	56.7	53.1
SLB-S(N) 15-3	453	779	463	789	453	779	220	161	-	61.5	62.1	58.5
SLB-S(N) 15-4	530	892	540	902	530	892	235	197	300	91.0	91.6	88.0
SLB-S(N) 15-5	575	980	585	990	575	980	235	197	300	98.3	99.0	95.3
SLB-S(N) 15-6	697	1142	707	1152	-	-	269	215	350	131.4	132.0	-
SLB-S(N) 15-7	742	1187	752	1197	-	-	269	215	350	132.8	133.4	-
SLB-S(N) 15-8	787	1232	797	1242	-	-	269	215	350	134.2	134.8	-
SLB-S(N) 15-9	832	1322	842	1332	-	-	269	215	350	146.4	147.0	-
SLB-S(N) 15-10	877	1367	887	1377	-	-	269	215	350	147.9	148.5	-
SLB-S(N) 15-12	967	1507	977	1517	-	-	318	241	350	184.5	182.2	-

Pump Type	Motor		Nominal Current [A]						
	P2		1Ø		3Ø				
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V	
SLB-S(N) 15-1	1.5	2.0	-	9.6 - 9.7	-	-	5.7 - 5.4	3.3 - 3.1	
SLB-S(N) 15-2	3.0	4.0	-	-	-	-	11.1 - 9.7	6.4 - 5.6	
SLB-S(N) 15-3	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6	
SLB-S(N) 15-4	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8	
SLB-S(N) 15-5	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8	
SLB-S(N) 15-6	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	
SLB-S(N) 15-7	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	
SLB-S(N) 15-8	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6	
SLB-S(N) 15-9	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9	
SLB-S(N) 15-10	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9	
SLB-S(N) 15-12	18.5	25.0	-	-	-	-	59.7 - 49.3	34.5 - 28.5	

Performance Range

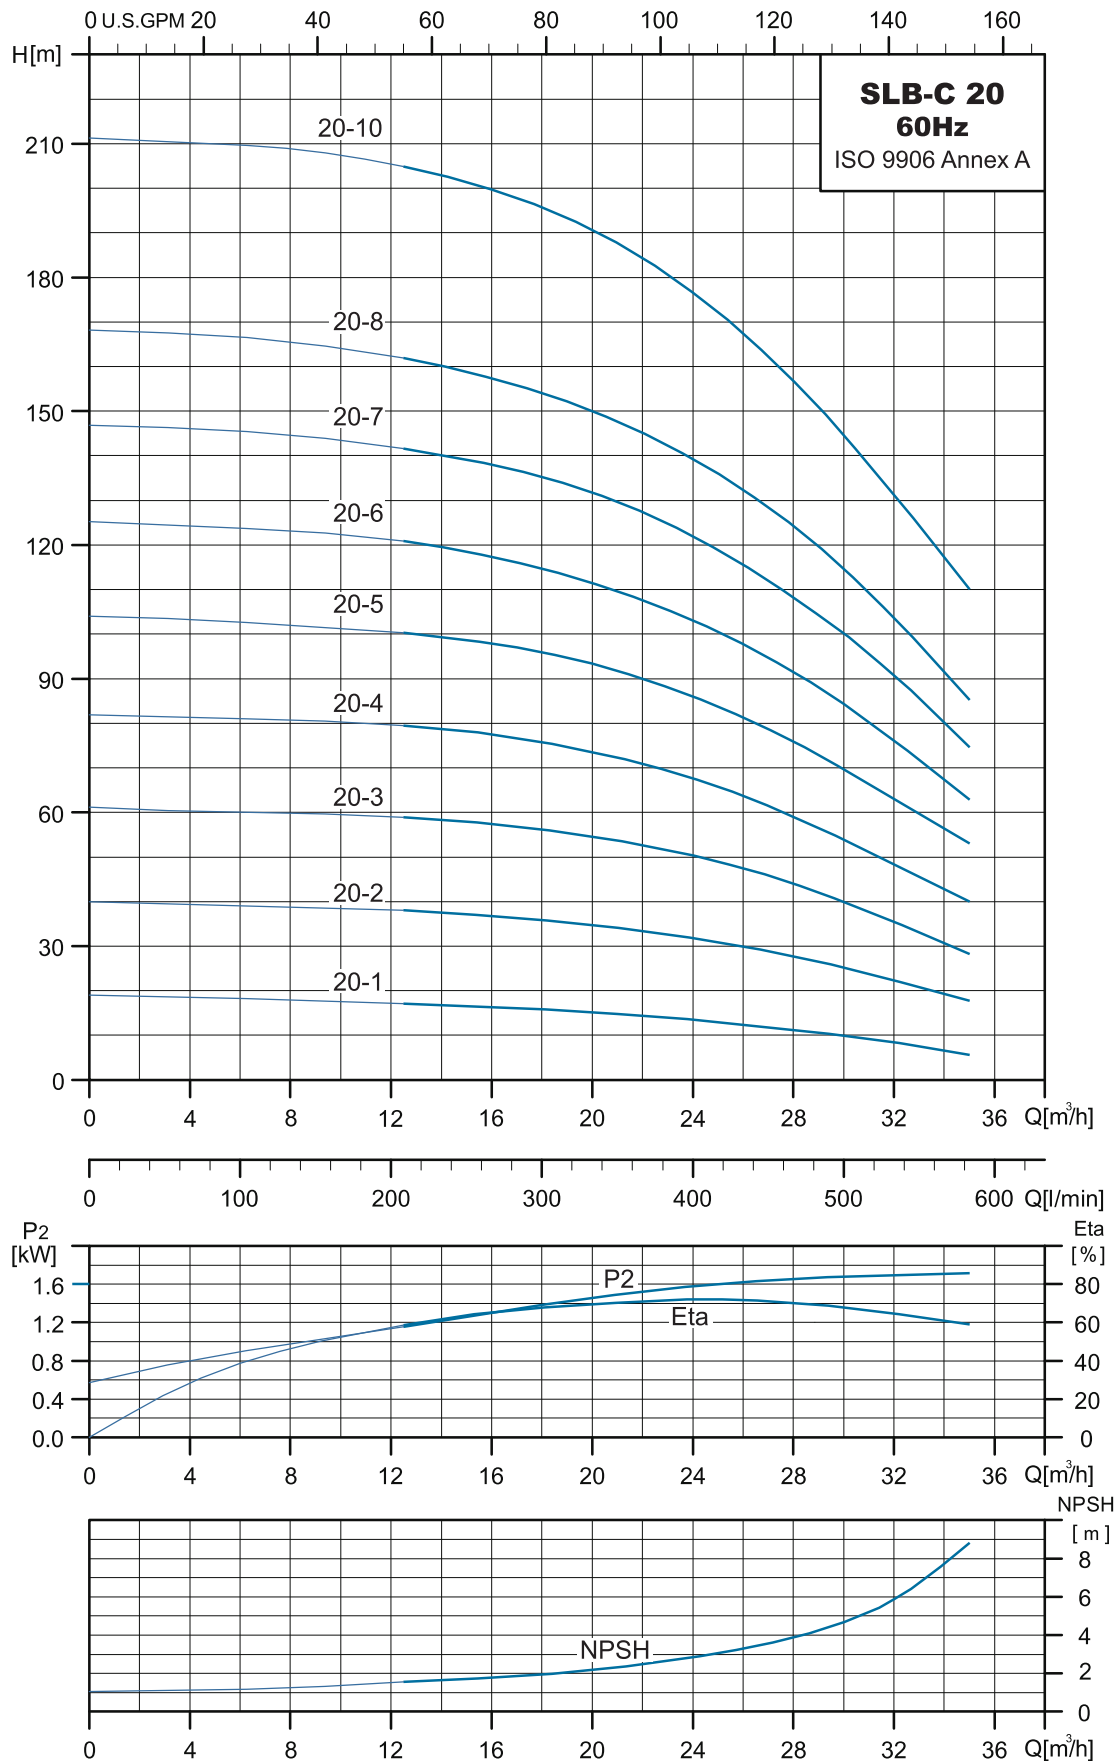


Dimensions and Weights

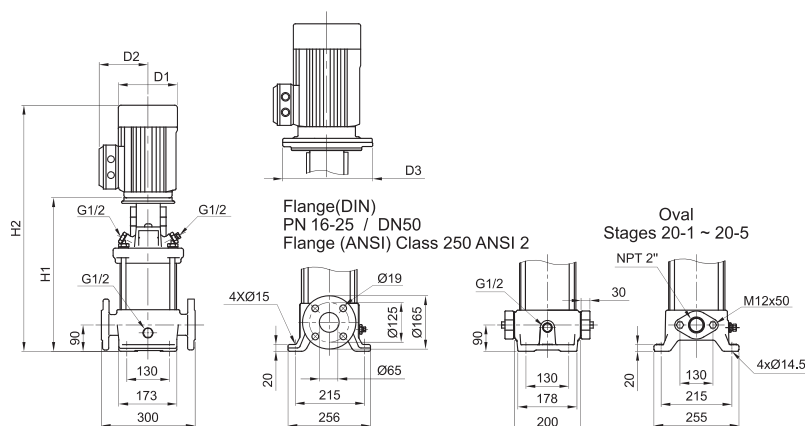


Pump Type	Dimension[mm]							Net Weight [kg]	
	flange		OVAL		D1	D2	D3	flange	OVAL
	H1	H2	H1	H2					
SLB-C 20-1	415	710	415	710	177	141	-	55.4	53.8
SLB-C 20-2	420	746	420	746	220	161	-	68.9	67.3
SLB-C 20-3	497	859	497	859	235	197	300	97.4	95.8
SLB-C 20-4	542	947	542	947	235	197	300	104.6	102.9
SLB-C 20-5	664	1109	664	1109	269	215	350	137.2	135.6
SLB-C 20-6	709	1154	-	-	269	215	350	138.7	-
SLB-C 20-7	754	1244	-	-	269	215	350	150.9	-
SLB-C 20-8	799	1289	-	-	269	215	350	152.3	-
SLB-C 20-10	889	1429	-	-	318	241	350	189.0	-

Pump Type	Motor		Nominal Current [A]					
	P2		1Ø		3Ø			
	[kW]	[HP]	110V/220V	220-240V	△220-255V	Y380-440V	△220-277V	Y380-480V
SLB-C 20-1	2.2	3.0	-	13.8 - 12.5	-	-	5.7 - 5.4	3.3 - 3.1
SLB-C 20-2	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-C 20-3	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-C 20-4	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8
SLB-C 20-5	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 20-6	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-C 20-7	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-C 20-8	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-C 20-10	18.5	25.0	-	-	-	-	59.7 - 49.3	34.5 - 28.5

Performance Range

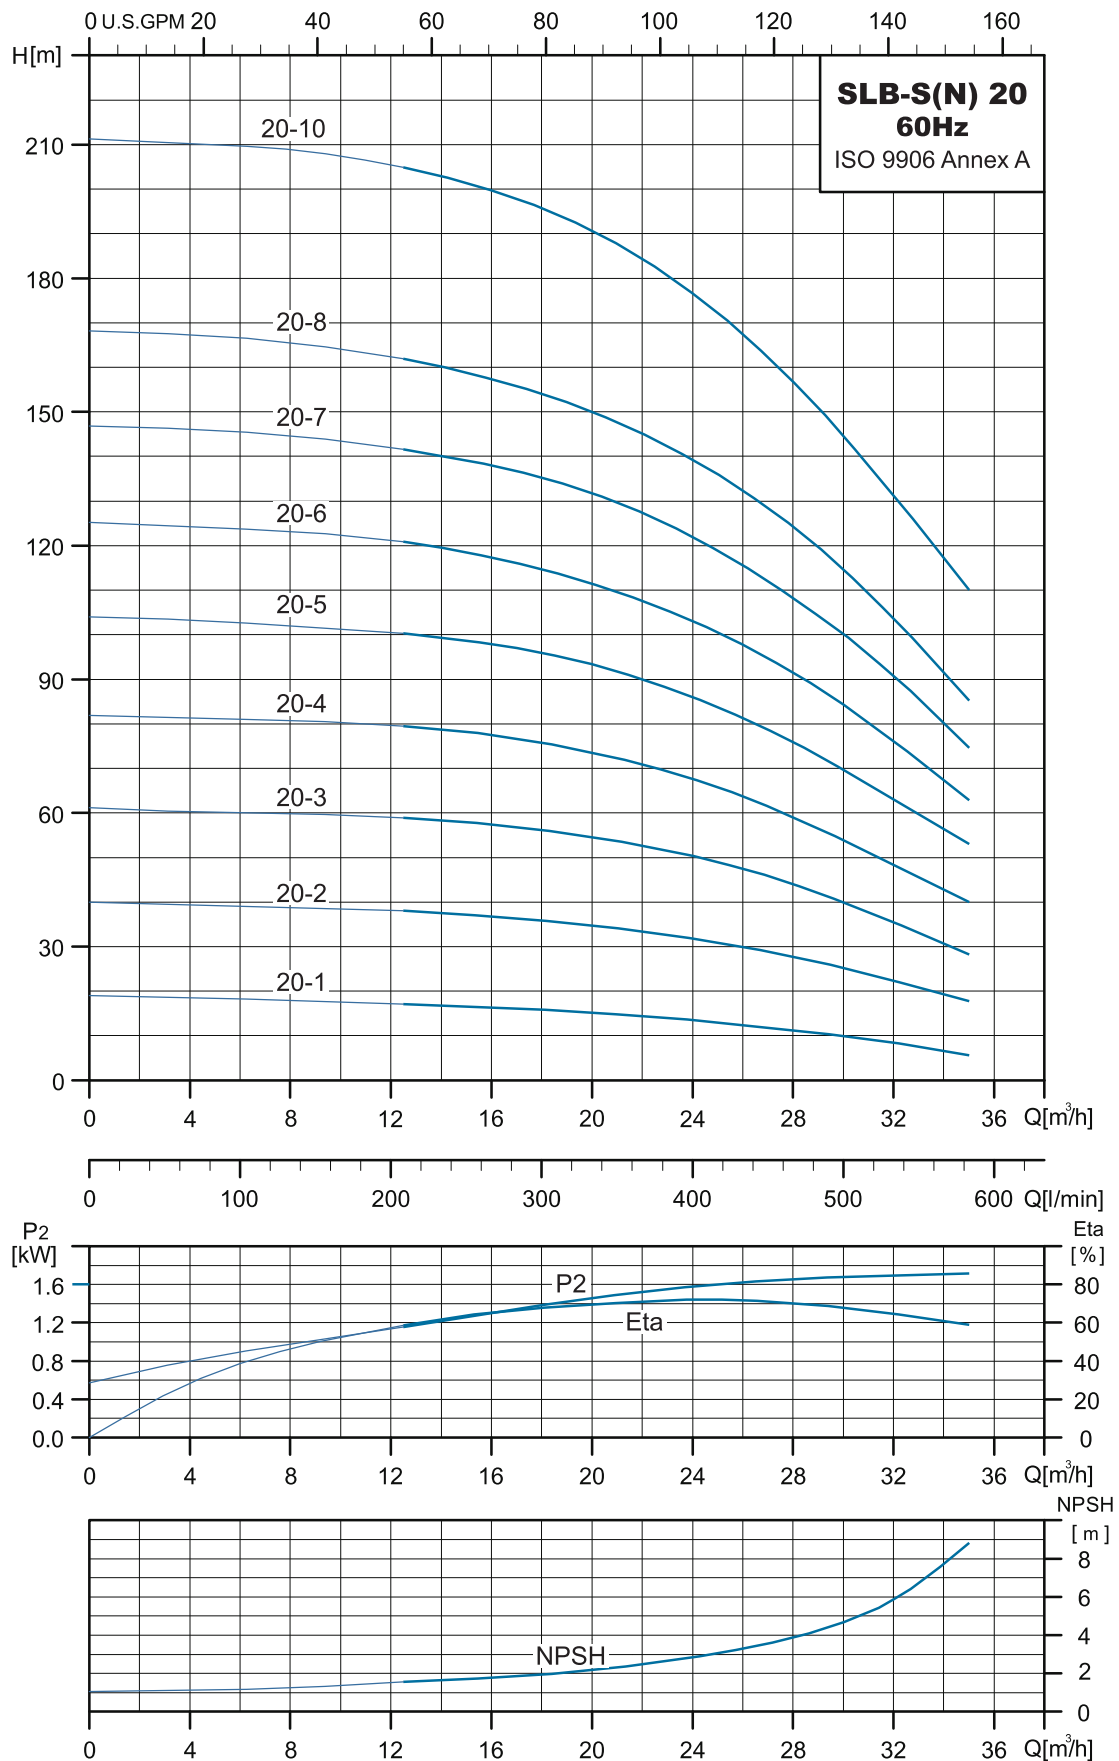


Dimensions and Weights

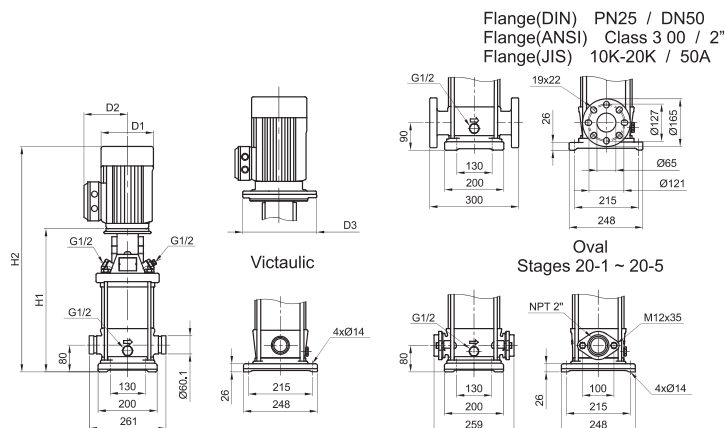


Pump Type	Dimension[mm]									Net Weight [kg]		
	Vactaulic		flange		OVAL		D1	D2	D3	Vactaulic	flange	OVAL
	H1	H2	H1	H2	H1	H2						
SLB-S(N) 20-1	405	700	415	710	405	700	177	141	-	47.4	48.1	44.4
SLB-S(N) 20-2	410	736	420	746	410	736	220	161	-	60.1	60.7	57.1
SLB-S(N) 20-3	487	849	497	859	487	849	235	197	300	89.6	90.2	86.6
SLB-S(N) 20-4	532	937	542	947	532	937	235	197	300	96.9	97.5	93.9
SLB-S(N) 20-5	654	1099	664	1109	654	1099	269	215	350	129.9	130.5	126.9
SLB-S(N) 20-6	699	1144	709	1154	-	-	269	215	350	131.4	132.0	-
SLB-S(N) 20-7	744	1234	754	1244	-	-	269	215	350	143.5	144.1	-
SLB-S(N) 20-8	789	1279	799	1289	-	-	269	215	350	144.9	145.5	-
SLB-S(N) 20-10	879	1419	889	1429	-	-	318	241	350	181.7	182.3	-

Pump Type	Motor		Nominal Current [A]					
	P2		1ø		3ø			
	[kW]	[HP]	110V/220V	220-240V	Δ220-255V	Y380-440V	Δ220-277V	Y380-480V
SLB-S(N) 20-1	2.2	3.0	-	13.8 - 12.5	-	-	5.7 - 5.4	3.3 - 3.1
SLB-S(N) 20-2	4.0	5.5	-	-	-	-	14.3 - 13.1	8.3 - 7.6
SLB-S(N) 20-3	5.5	7.5	-	-	-	-	19.2 - 16.9	11.1 - 9.8
SLB-S(N) 20-4	7.5	10.0	-	-	-	-	25.4 - 22.1	14.7 - 12.8
SLB-S(N) 20-5	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-S(N) 20-6	11.0	15.0	-	-	-	-	37.0 - 33.9	21.4 - 19.6
SLB-S(N) 20-7	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-S(N) 20-8	15.0	20.0	-	-	-	-	49.2 - 41.4	28.5 - 23.9
SLB-S(N) 20-10	18.5	25.0	-	-	-	-	59.7 - 49.3	34.5 - 28.5

Performance Range

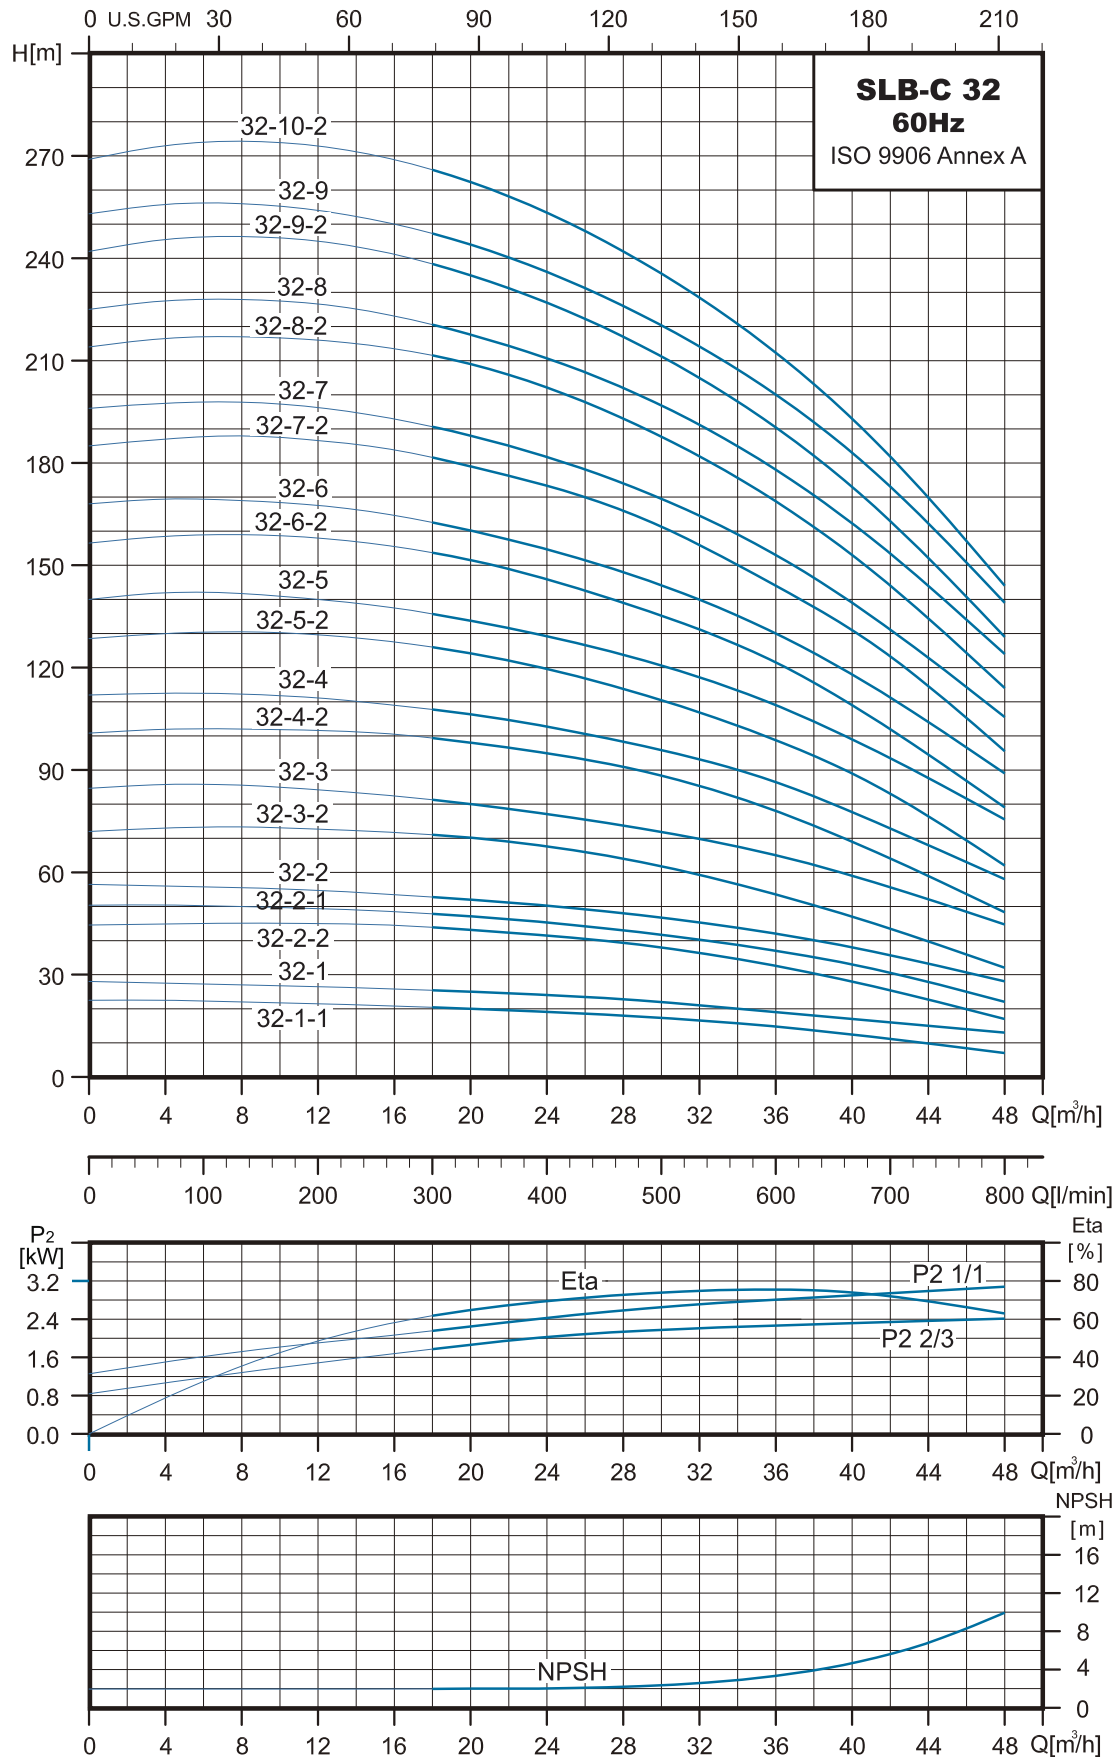


Dimensions and Weights

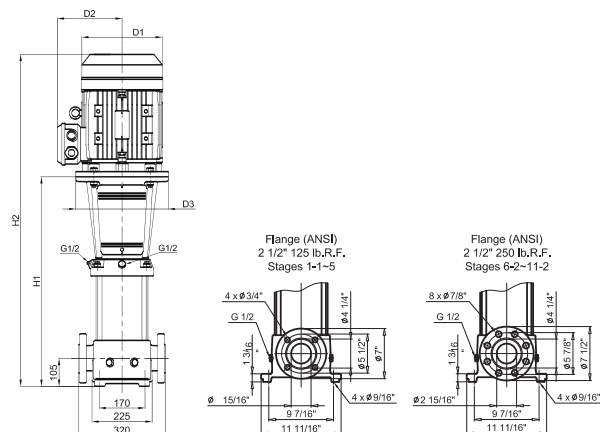


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				
SLB-C 32-1-1	504	799	177	141	280	74.3
SLB-C 32-1	504	820	197	147	280	82.5
SLB-C 32-2-2	574	936	235	197	300	106.4
SLB-C 32-2-1	574	936	235	197	300	106.4
SLB-C 32-2	574	979	235	197	300	112.3
SLB-C 32-3-2	754	1199	269	215	350	151.6
SLB-C 32-3	754	1199	269	215	350	151.6
SLB-C 32-4-2	824	1269	269	215	350	154.7
SLB-C 32-4	824	1314	269	215	350	165.4
SLB-C 32-5-2	894	1384	269	215	350	168.5
SLB-C 32-5	894	1434	318	241	350	202.3
SLB-C 32-6-2	964	1504	318	241	350	205.3
SLB-C 32-6	964	1504	318	241	350	205.3
SLB-C 32-7-2	1034	1574	318	241	350	221.2
SLB-C 32-7	1034	1574	318	241	350	221.2
SLB-C 32-8-2	1104	1764	390	295	400	328.1
SLB-C 32-8	1104	1764	390	295	400	328.1
SLB-C 32-9-2	1174	1834	390	295	400	330.8
SLB-C 32-9	1174	1834	390	295	400	330.8
SLB-C 32-10-2	1244	1904	390	295	400	333.5

Pump Type	Motor		Nominal Current [A]				
	P2		1Ø	3Ø			
	[kW]	[HP]		220-240V	△220-277V	Y380-480V	△208-230V
SLB-C 32-1-1	2.2	3.0	13.8 - 12.5	8.1 - 7.2	4.7 - 4.2	-	-
SLB-C 32-1	3.0	4.0	-	11.1 - 9.7	6.4 - 5.6	-	-
SLB-C 32-2-2	5.5	7.5	-	19.2 - 16.9	11.1 - 9.8	-	-
SLB-C 32-2-1	5.5	7.5	-	19.2 - 16.9	11.1 - 9.8	-	-
SLB-C 32-2	7.5	10.0	-	25.4 - 22.1	14.7 - 12.8	-	-
SLB-C 32-3-2	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 32-3	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 32-4-2	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 32-4	15.0	20.0	-	49.2 - 41.4	28.5 - 23.9	-	-
SLB-C 32-5-2	15.0	20.0	-	49.2 - 41.4	28.5 - 23.9	-	-
SLB-C 32-5	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 32-6-2	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 32-6	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 32-7-2	22.0	30.0	-	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 32-7	22.0	30.0	-	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 32-8-2	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-C 32-8	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-C 32-9-2	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-C 32-9	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-C 32-10-2	30.0	40.0	-	-	-	101 - 91.6	45.8

Performance Range

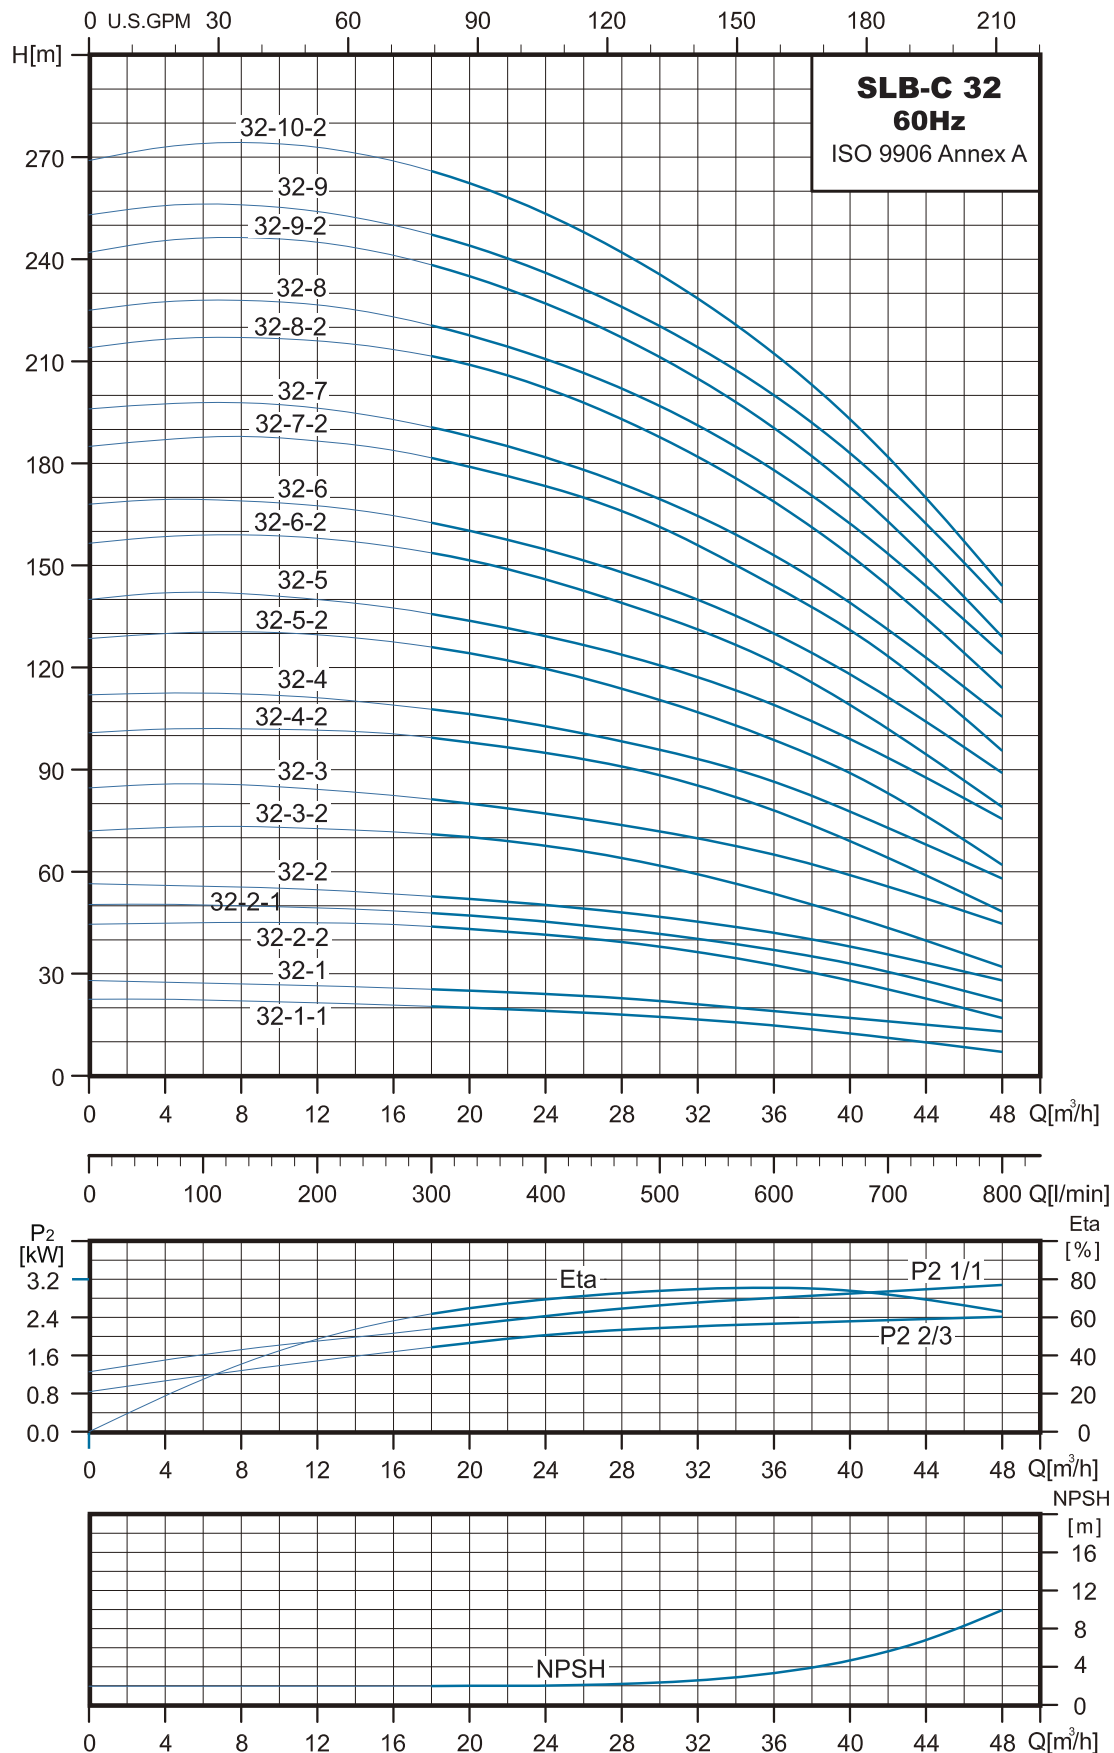


Dimensions and Weights

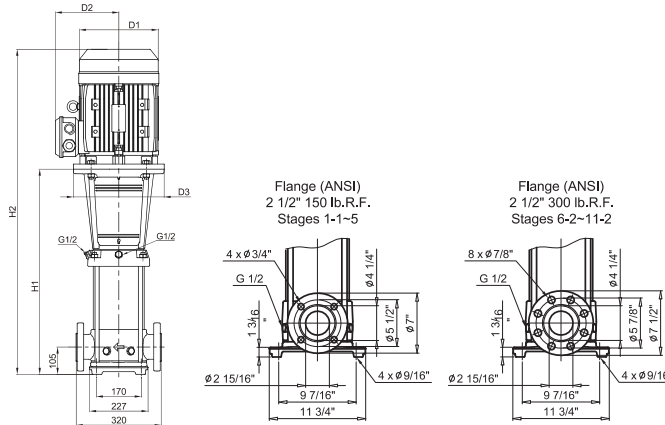


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				flange
SLB-S(N) 32-1-1	504	799	177	141	280	69.3
SLB-S(N) 32-1	504	820	197	147	280	77.4
SLB-S(N) 32-2-2	574	936	235	197	300	101.3
SLB-S(N) 32-2-1	574	936	235	197	300	101.3
SLB-S(N) 32-2	574	979	235	197	300	107.2
SLB-S(N) 32-3-2	754	1199	269	215	350	146.5
SLB-S(N) 32-3	754	1199	269	215	350	146.5
SLB-S(N) 32-4-2	824	1269	269	215	350	149.6
SLB-S(N) 32-4	824	1314	269	215	350	160.3
SLB-S(N) 32-5-2	894	1384	269	215	350	163.4
SLB-S(N) 32-5	894	1434	318	241	350	197.3
SLB-S(N) 32-6-2	964	1504	318	241	350	200.4
SLB-S(N) 32-6	964	1504	318	241	350	200.4
SLB-S(N) 32-7-2	1034	1574	318	241	350	216.2
SLB-S(N) 32-7	1034	1574	318	241	350	216.2
SLB-S(N) 32-8-2	1104	1764	390	295	400	323.1
SLB-S(N) 32-8	1104	1764	390	295	400	323.1
SLB-S(N) 32-9-2	1174	1834	390	295	400	325.9
SLB-S(N) 32-9	1174	1834	390	295	400	325.9
SLB-S(N) 32-10-2	1244	1904	390	295	400	328.5

Pump Type	Motor		Nominal Current [A]				
	P2		1Ø	3Ø			
	[kW]	[HP]		220-240V	△220-277V	Y380-480V	△208-230V Y460V
SLB-S(N) 32-1-1	2.2	3.0	13.8 - 12.5	8.1 - 7.2	4.7 - 4.2	-	-
SLB-S(N) 32-1	3.0	4.0	-	11.1 - 9.7	6.4 - 5.6	-	-
SLB-S(N) 32-2-2	5.5	7.5	-	19.2 - 16.9	11.1 - 9.8	-	-
SLB-S(N) 32-2-1	5.5	7.5	-	19.2 - 16.9	11.1 - 9.8	-	-
SLB-S(N) 32-2	7.5	10.0	-	25.4 - 22.1	14.7 - 12.8	-	-
SLB-S(N) 32-3-2	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 32-3	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 32-4-2	11.0	15.0	-	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 32-4	15.0	20.0	-	49.2 - 41.4	28.5 - 23.9	-	-
SLB-S(N) 32-5-2	15.0	20.0	-	49.2 - 41.4	28.5 - 23.9	-	-
SLB-S(N) 32-5	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 32-6-2	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 32-6	18.5	25.0	-	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 32-7-2	22.0	30.0	-	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 32-7	22.0	30.0	-	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 32-8-2	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-S(N) 32-8	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-S(N) 32-9-2	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-S(N) 32-9	30.0	40.0	-	-	-	101 - 91.6	45.8
SLB-S(N) 32-10-2	30.0	40.0	-	-	-	101 - 91.6	45.8

Performance Range

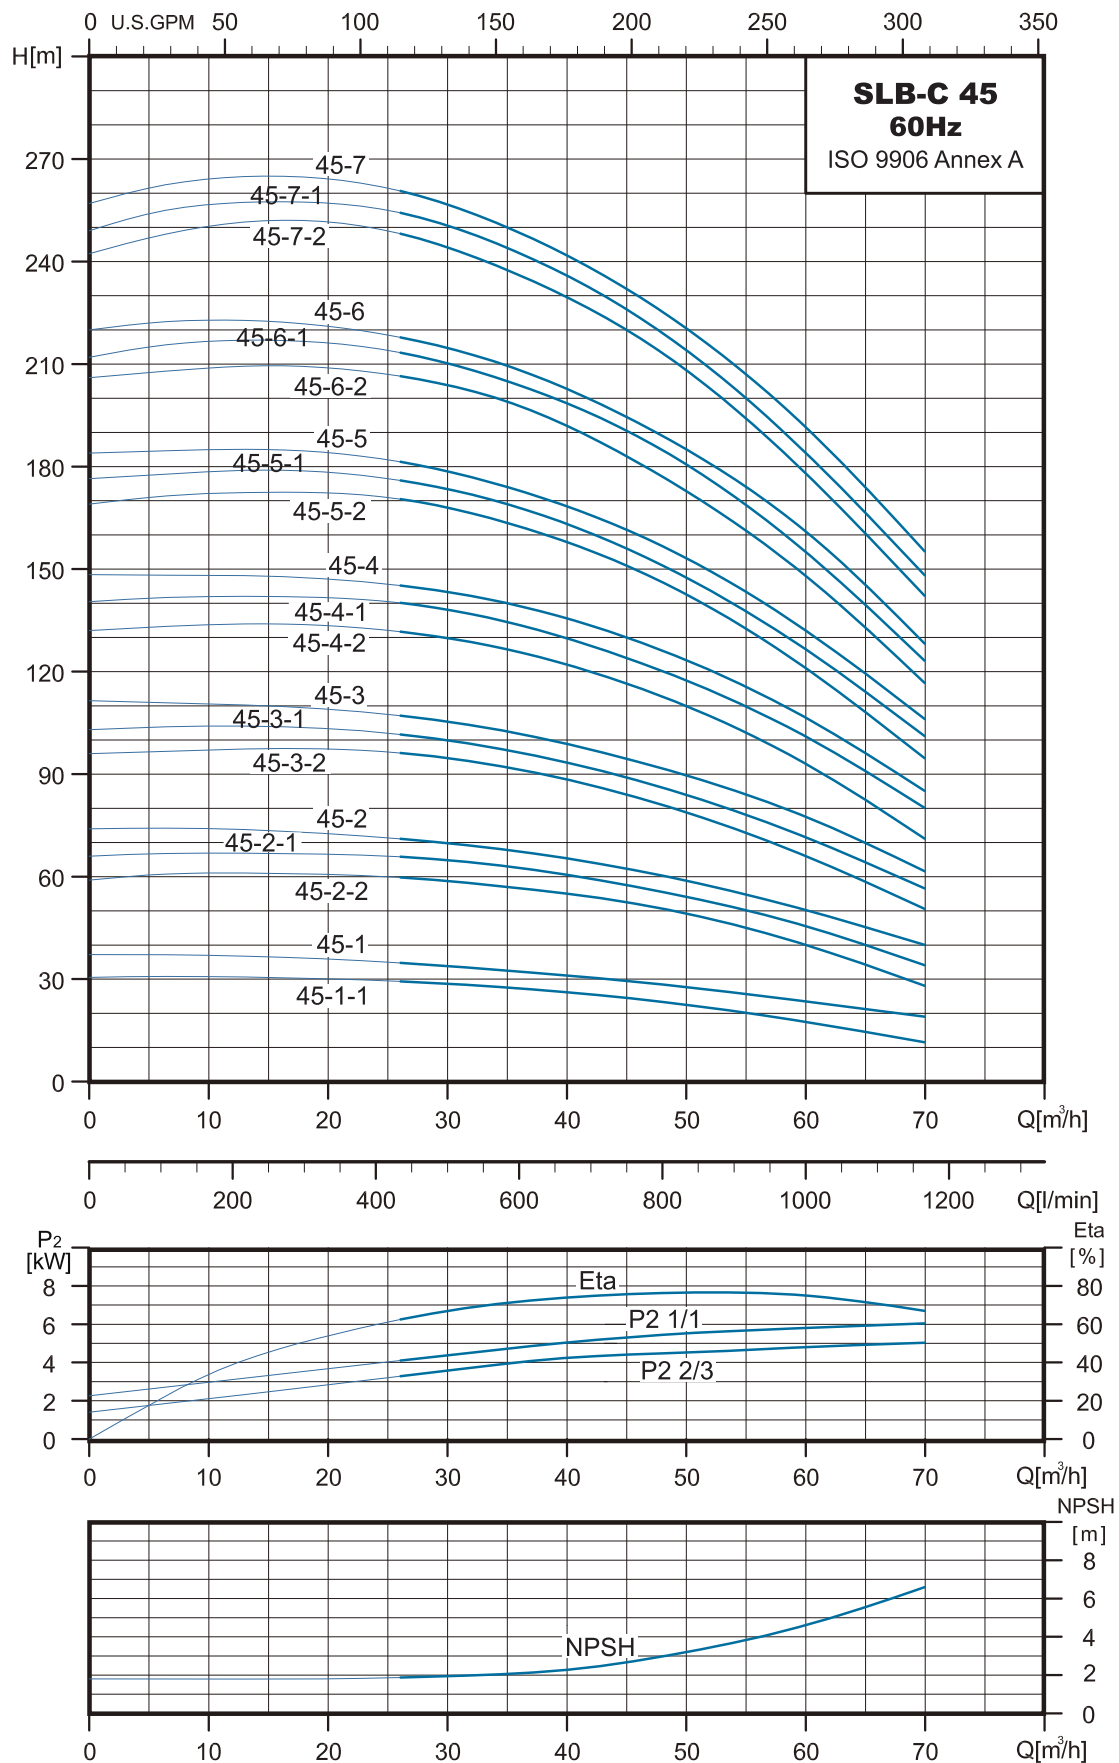


Dimensions and Weights

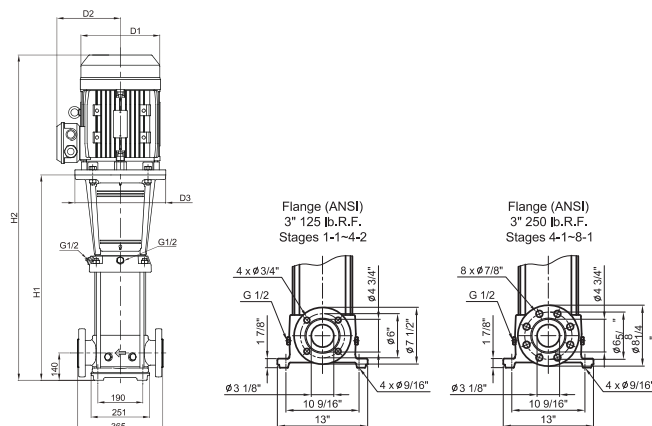


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				
SLB-C 45-1-1	561	923	235	197	300	113.9
SLB-C 45-1	561	966	235	197	300	119.8
SLB-C 45-2-2	751	1196	269	215	350	159.7
SLB-C 45-2-1	751	1196	269	215	350	159.7
SLB-C 45-2	751	1241	269	215	350	170.4
SLB-C 45-3-2	831	1371	318	241	350	208.0
SLB-C 45-3-1	831	1371	318	241	350	208.0
SLB-C 45-3	831	1371	318	241	350	208.0
SLB-C 45-4-2	911	1451	318	241	350	224.5
SLB-C 45-4-1	911	1571	390	295	400	328.1
SLB-C 45-4	911	1571	390	295	400	328.1
SLB-C 45-5-2	991	1651	390	295	400	331.9
SLB-C 45-5-1	991	1651	390	295	400	331.9
SLB-C 45-5	991	1651	390	295	400	331.9
SLB-C 45-6-2	1071	1731	390	295	400	353.7
SLB-C 45-6-1	1071	1731	390	295	400	353.7
SLB-C 45-6	1071	1731	390	295	400	353.7
SLB-C 45-7-2	1151	1841	446	325	450	433.6
SLB-C 45-7-1	1151	1841	446	325	450	433.6
SLB-C 45-7	1151	1841	446	325	450	433.6

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-C 45-1-1	5.5	7.5	19.2 - 16.9	11.1 - 9.8	-	-
SLB-C 45-1	7.5	10.0	25.4 - 22.1	14.7 - 12.8	-	-
SLB-C 45-2-2	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 45-2-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 45-2	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-C 45-3-2	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 45-3-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 45-3	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 45-4-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 45-4-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 45-4	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 45-5-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 45-5-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 45-5	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 45-6-2	37.0	50.0	-	-	124 - 112	56.1
SLB-C 45-6-1	37.0	50.0	-	-	124 - 112	56.1
SLB-C 45-6	37.0	50.0	-	-	124 - 112	56.1
SLB-C 45-7-2	45.0	60.0	-	-	150 - 136	67.8
SLB-C 45-7-1	45.0	60.0	-	-	150 - 136	67.8
SLB-C 45-7	45.0	60.0	-	-	150 - 136	67.8

Performance Range

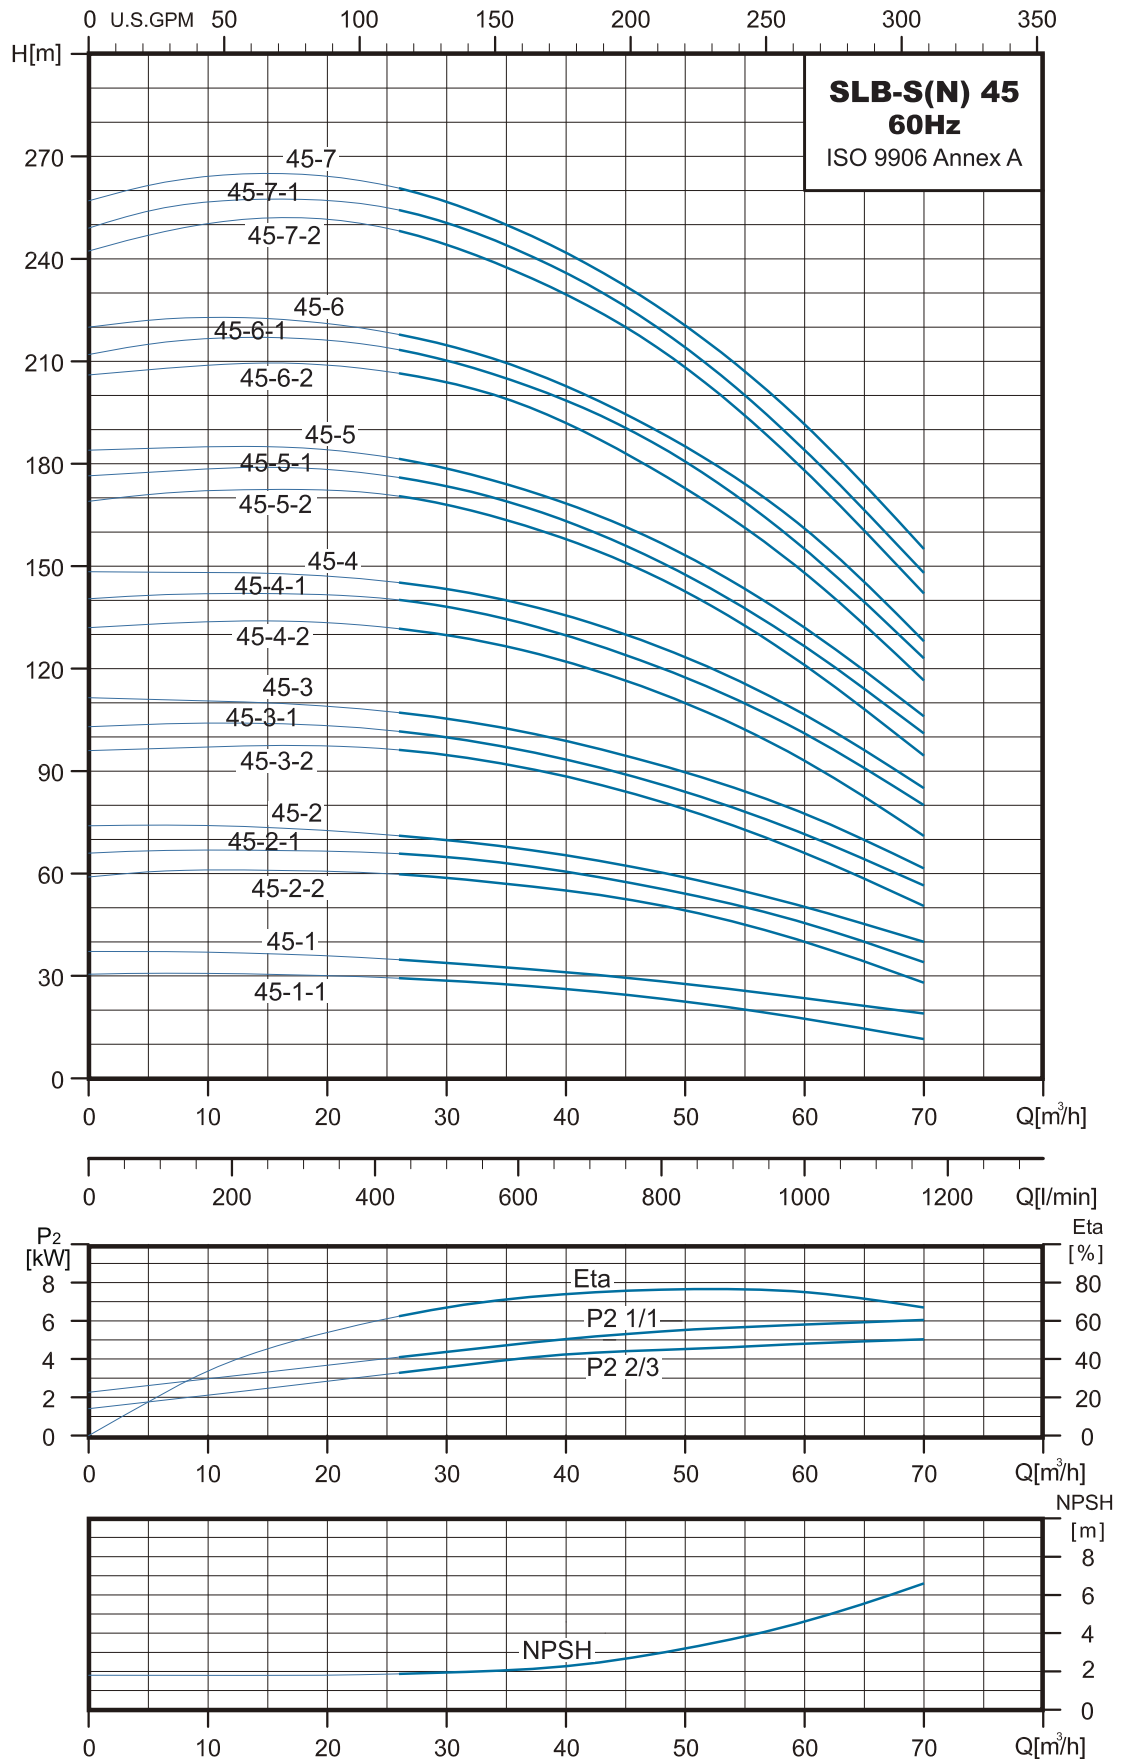


Dimensions and Weights

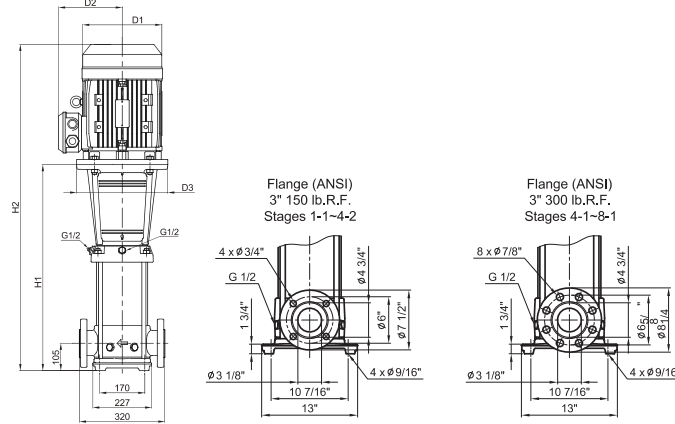


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				
SLB-S(N) 45-1-1	559	921	235	197	300	105.1
SLB-S(N) 45-1	559	964	235	197	300	111.0
SLB-S(N) 45-2-2	749	1194	269	215	350	150.9
SLB-S(N) 45-2-1	749	1194	269	215	350	150.9
SLB-S(N) 45-2	749	1239	269	215	350	161.6
SLB-S(N) 45-3-2	829	1369	318	241	350	199.2
SLB-S(N) 45-3-1	829	1369	318	241	350	199.2
SLB-S(N) 45-3	829	1369	318	241	350	199.2
SLB-S(N) 45-4-2	909	1449	318	241	350	215.7
SLB-S(N) 45-4-1	909	1569	390	295	400	319.3
SLB-S(N) 45-4	909	1569	390	295	400	319.3
SLB-S(N) 45-5-2	989	1649	390	295	400	323.1
SLB-S(N) 45-5-1	989	1649	390	295	400	323.1
SLB-S(N) 45-5	989	1649	390	295	400	323.1
SLB-S(N) 45-6-2	1069	1729	390	295	400	344.9
SLB-S(N) 45-6-1	1069	1729	390	295	400	344.9
SLB-S(N) 45-6	1069	1729	390	295	400	344.9
SLB-S(N) 45-7-2	1149	1839	446	325	450	424.8
SLB-S(N) 45-7-1	1149	1839	446	325	450	424.8
SLB-S(N) 45-7	1149	1839	446	325	450	424.8

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-S(N) 45-1-1	5.5	7.5	19.2 - 16.9	11.1 - 9.8	-	-
SLB-S(N) 45-1	7.5	10.0	25.4 - 22.1	14.7 - 12.8	-	-
SLB-S(N) 45-2-2	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 45-2-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 45-2	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-S(N) 45-3-2	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 45-3-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 45-3	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 45-4-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 45-4-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 45-4	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 45-5-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 45-5-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 45-5	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 45-6-2	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 45-6-1	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 45-6	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 45-7-2	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 45-7-1	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 45-7	45.0	60.0	-	-	150 - 136	67.8

Performance Range

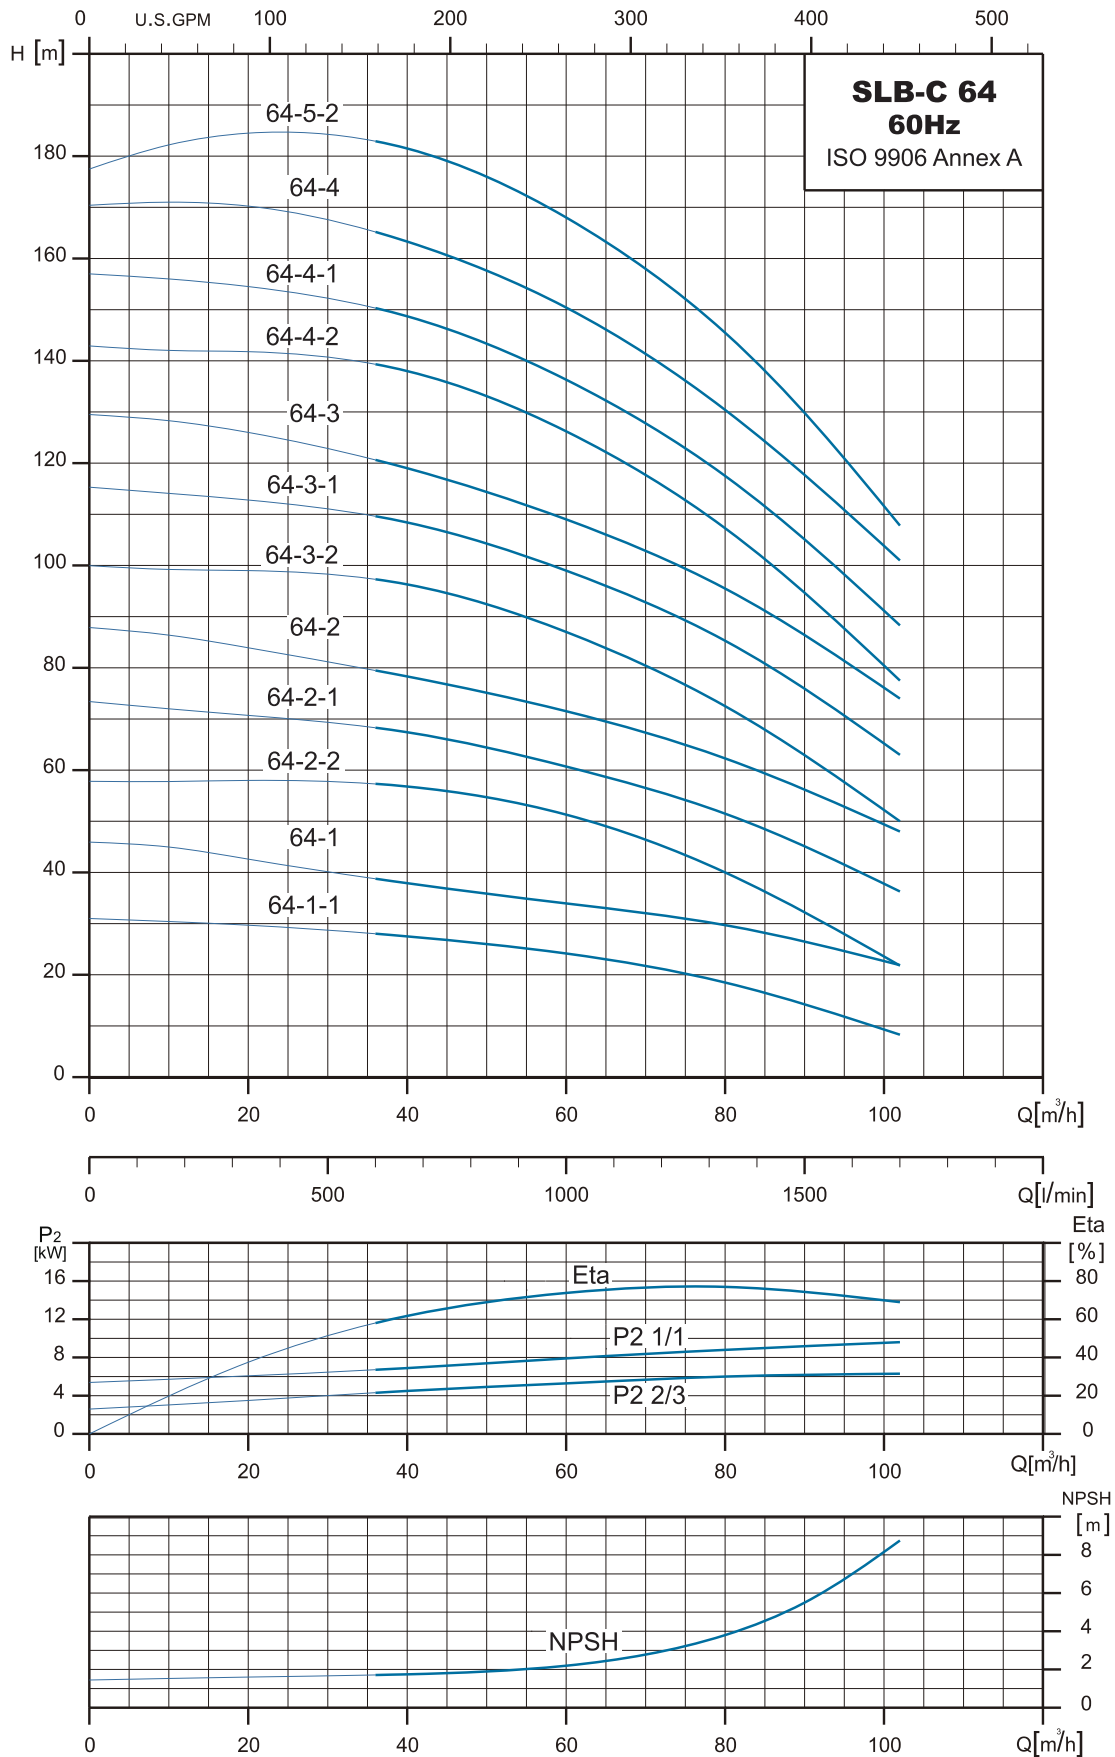


Dimensions and Weights

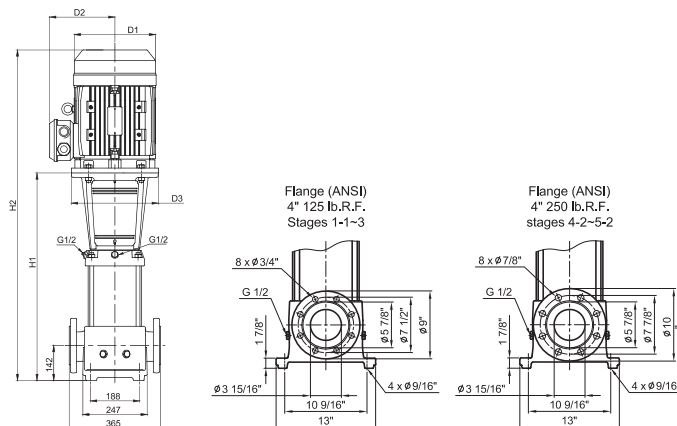


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				
SLB-C 64-1-1	563	968	235	197	300	113,5
SLB-C 64-1	673	1118	269	215	350	149,7
SLB-C 64-2-2	756	1246	269	215	350	164,5
SLB-C 64-2-1	756	1296	318	241	350	198,3
SLB-C 64-2	756	1296	318	241	350	211,0
SLB-C 64-3-2	838	1378	318	241	350	215,6
SLB-C 64-3-1	838	1498	390	295	400	319,2
SLB-C 64-3	838	1498	390	295	400	319,2
SLB-C 64-4-2	921	1581	390	295	400	341,2
SLB-C 64-4-1	921	1581	390	295	400	341,2
SLB-C 64-4	925	1615	446	325	450	417,4
SI B-C 64-5-2	1007	1697	446	325	450	421,4

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-C 64-1-1	7.5	10.0	25.4 - 22.1	14.7 - 12.8	-	-
SLB-C 64-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 64-2-2	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-C 64-2-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 64-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 64-3-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 64-3-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 64-3	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 64-4-2	37.0	50.0	-	-	124 - 112	56.1
SLB-C 64-4-1	37.0	50.0	-	-	124 - 112	56.1
SLB-C 64-4	45.0	60.0	-	-	150 - 136	67.8
SLB-C 64-5-2	45.0	60.0	-	-	150 - 136	67.8

Performance Range

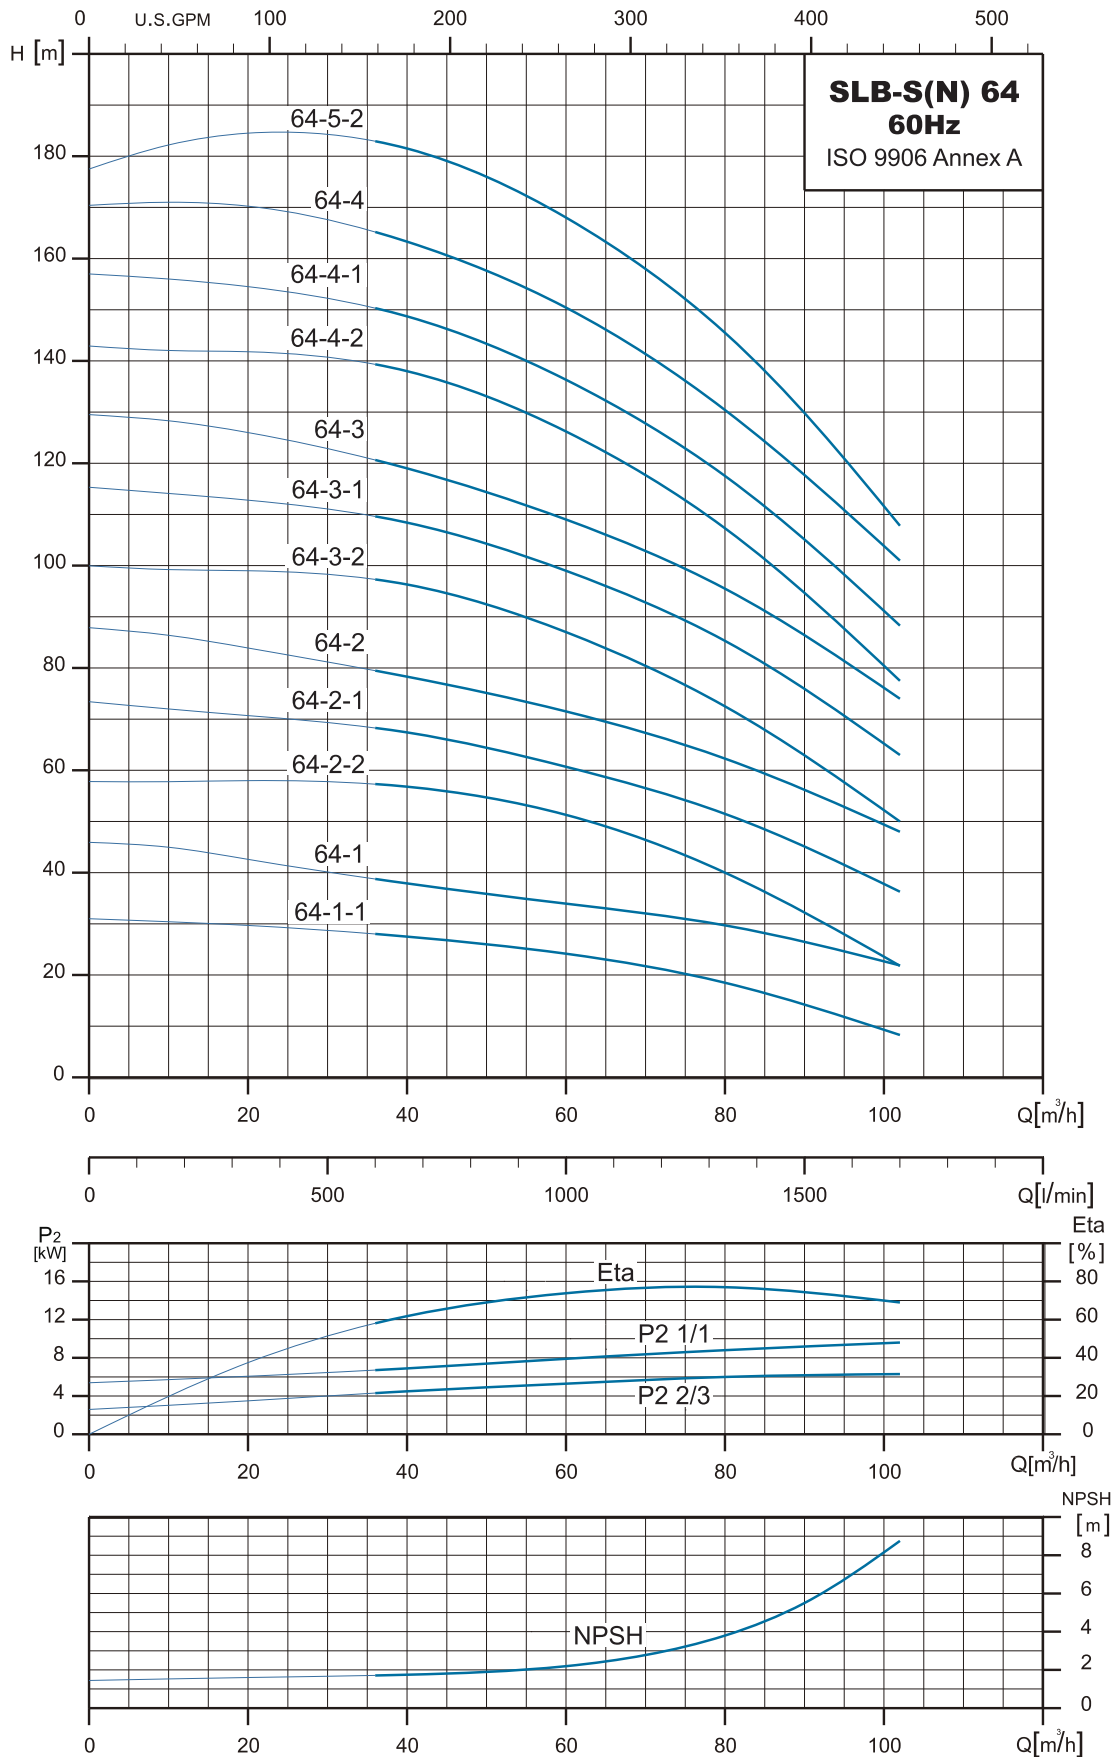


Dimensions and Weights

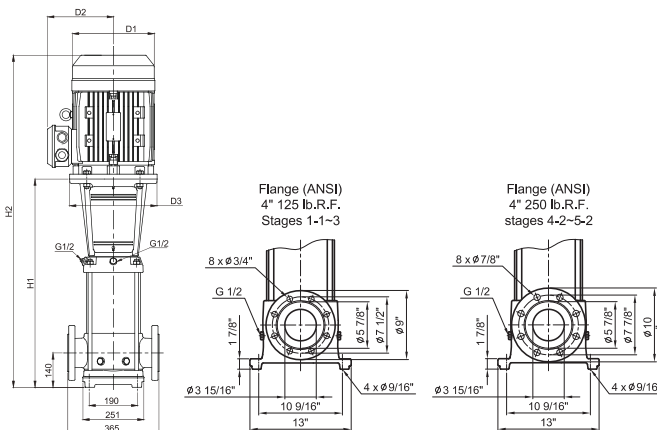


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				flange
SLB-S(N) 64-1-1	563	968	235	197	300	106.5
SLB-S(N) 64-1	673	1118	269	215	350	142.7
SLB-S(N) 64-2-2	756	1246	269	215	350	157.5
SLB-S(N) 64-2-1	756	1296	318	241	350	191.3
SLB-S(N) 64-2	756	1296	318	241	350	204.0
SLB-S(N) 64-3-2	838	1378	318	241	350	208.1
SLB-S(N) 64-3-1	838	1498	390	295	400	311.7
SLB-S(N) 64-3	838	1498	390	295	400	311.7
SLB-S(N) 64-4-2	921	1581	390	295	400	333.7
SLB-S(N) 64-4-1	921	1581	390	295	400	333.7
SLB-S(N) 64-4	925	1615	446	325	450	409.8
SLB-S(N) 64-5-2	1007	1697	446	325	450	413.8

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△ 220-277V	Y 380-480V	△ 208-230V	Y 460V
SLB-S(N) 64-1-1	7.5	10.0	25.4 - 22.1	14.7 - 12.8	-	-
SLB-S(N) 64-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 64-2-2	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-S(N) 64-2-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 64-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 64-3-2	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 64-3-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 64-3	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 64-4-2	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 64-4-1	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 64-4	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 64-5-2	45.0	60.0	-	-	150 - 136	67.8

Performance Range

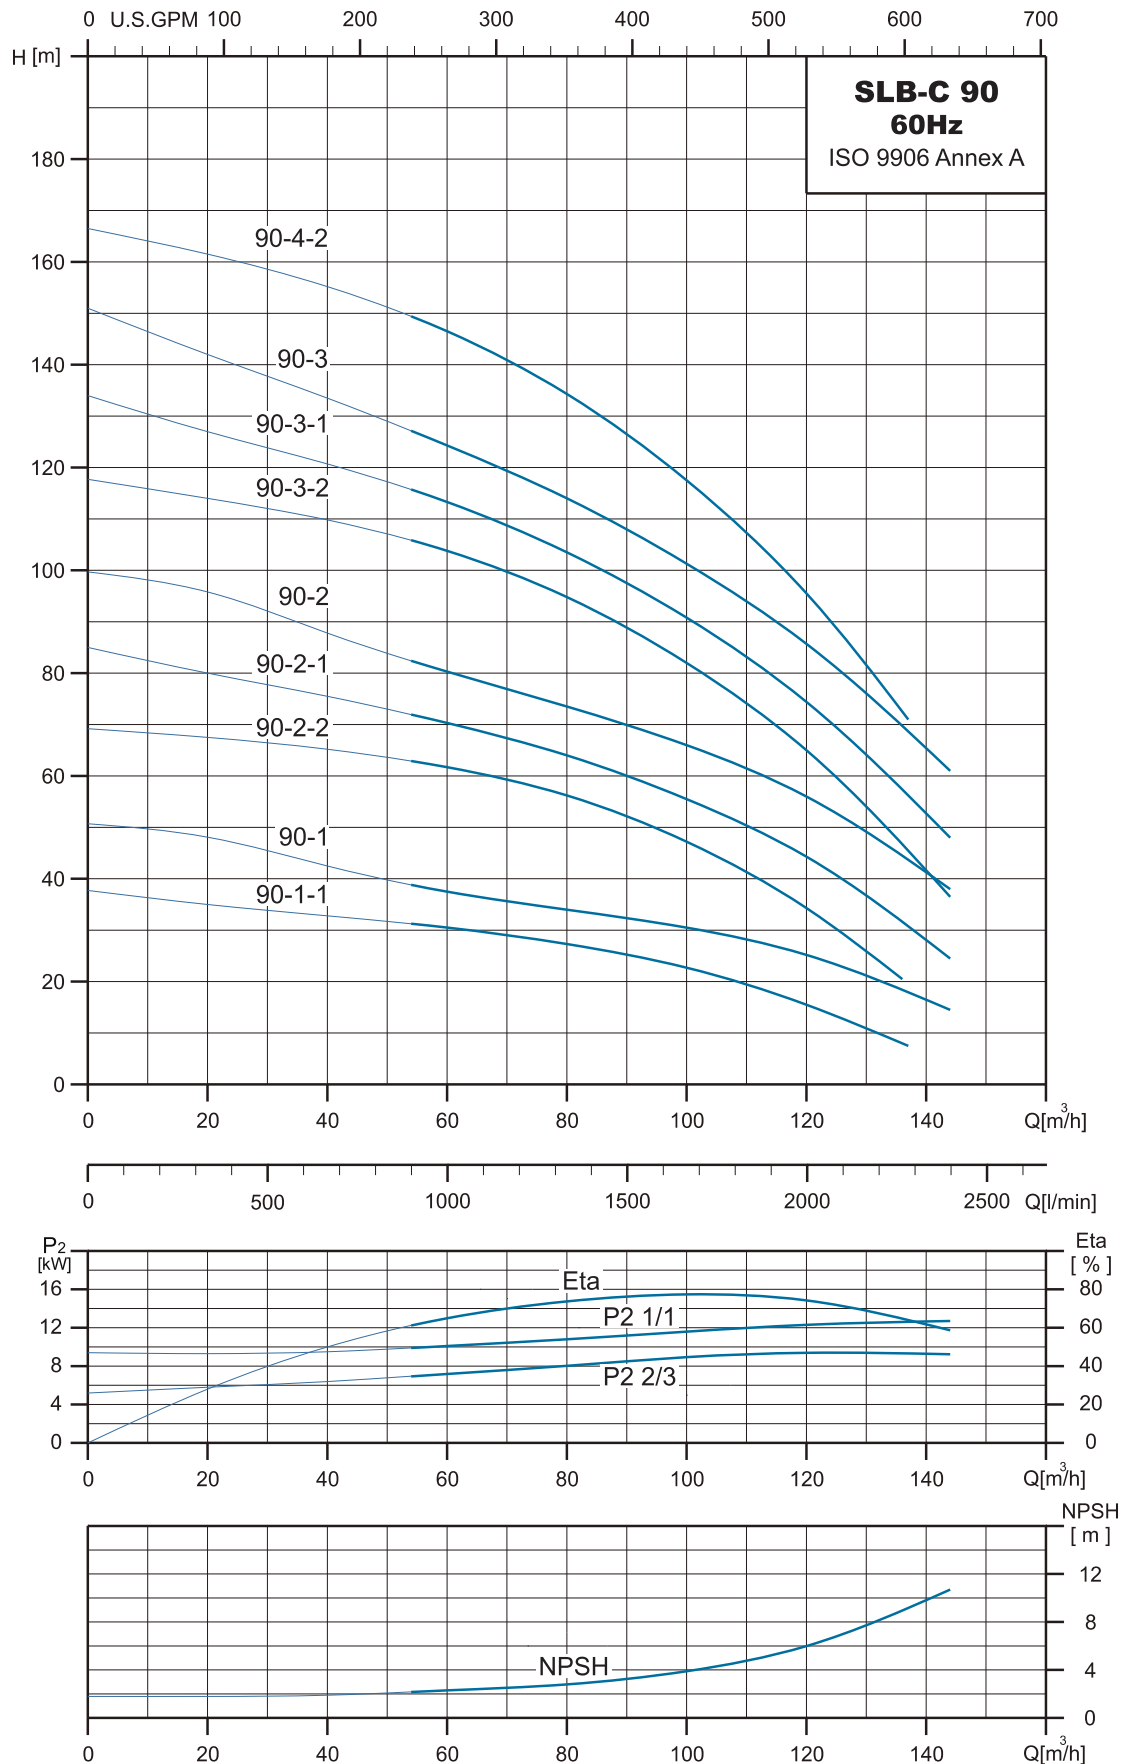


Dimensions and Weights

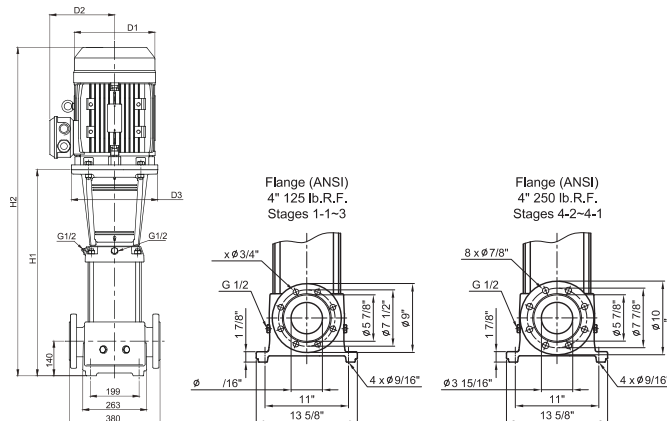


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	
	H1	H2				flange
SLB-C 90-1-1	682	1127	269	215	350	157.1
SLB-C 90-1	682	1172	269	215	350	167.7
SLB-C 90-2-2	774	1314	318	241	350	207.0
SLB-C 90-2-1	774	1314	318	241	350	219.7
SLB-C 90-2	774	1434	390	295	400	323.3
SLB-C 90-3-2	866	1526	390	295	400	346.6
SLB-C 90-3-1	866	1526	390	295	400	346.6
SLB-C 90-3	866	1556	446	325	450	422.7
SLB-C 90-4-2	958	1648	446	325	450	427.9

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-C 90-1-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-C 90-1	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-C 90-2-2	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 90-2-1	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 90-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 90-3-2	37.0	50.0	-	-	124 - 112	56.1
SLB-C 90-3-1	37.0	50.0	-	-	124 - 112	56.1
SLB-C 90-3	45.0	60.0	-	-	150 - 136	67.8
SLB-C 90-4-2	45.0	60.0	-	-	150 - 136	67.8

Performance Range

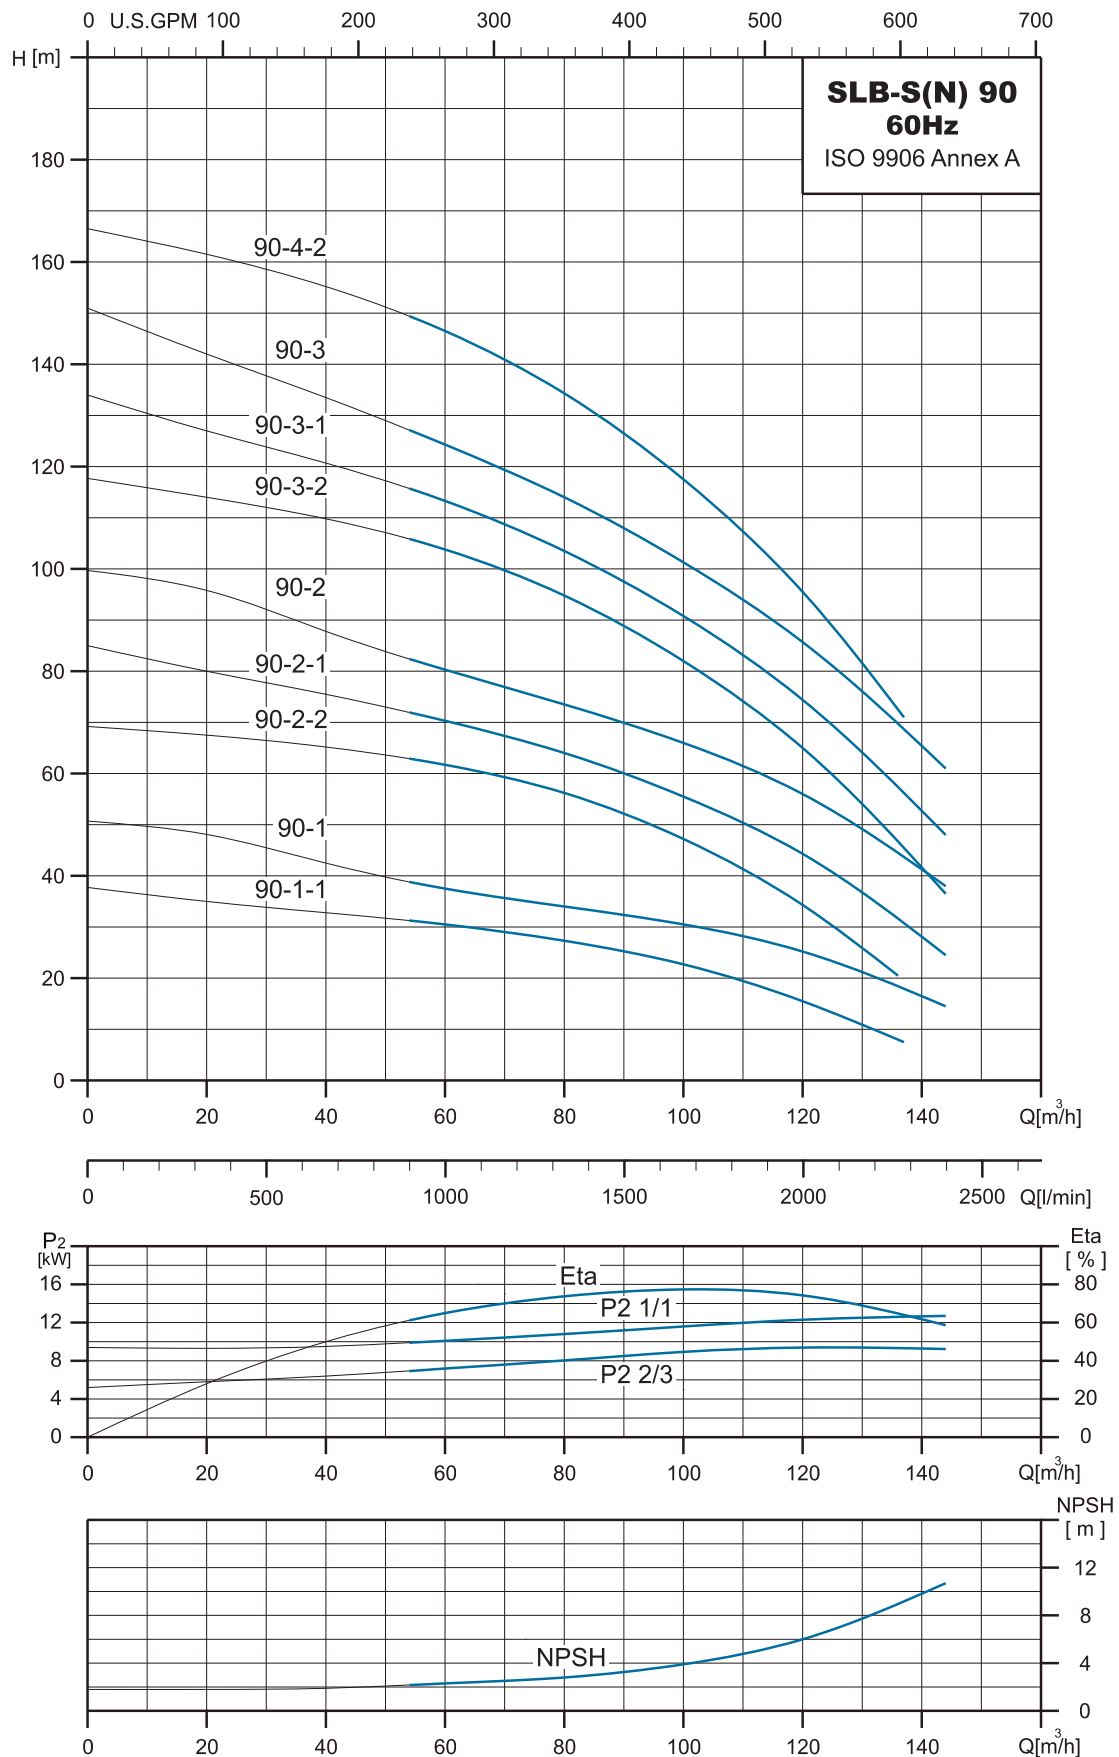


Dimensions and Weights

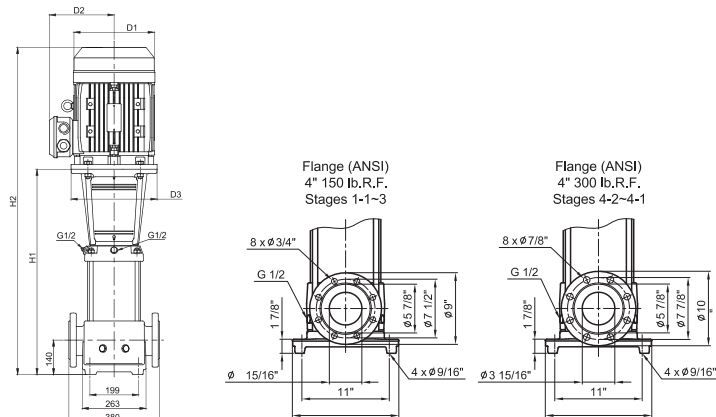


Pump Type	Dimension[mm]					Net Weight [kg]
	flange		D1	D2	D3	flange
	H1	H2				
SLB-S(N) 90-1-1	686	1131	269	215	350	153,5
SLB-S(N) 90-1	686	1176	269	215	350	164,1
SLB-S(N) 90-2-2	778	1318	318	241	350	203,2
SLB-S(N) 90-2-1	778	1318	318	241	350	216,0
SLB-S(N) 90-2	778	1438	390	295	400	319,6
SLB-S(N) 90-3-2	870	1530	390	295	400	342,8
SLB-S(N) 90-3-1	870	1530	390	295	400	342,8
SLB-S(N) 90-3	870	1560	446	325	450	418,9
SLB-S(N) 90-4-2	962	1652	446	325	450	425,9

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-S(N) 90-1-1	11.0	15.0	37.0 - 33.9	21.4 - 19.6	-	-
SLB-S(N) 90-1	15.0	20.0	49.2 - 41.4	28.5 - 23.9	-	-
SLB-S(N) 90-2-2	18,5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 90-2-1	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 90-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 90-3-2	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 90-3-1	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 90-3	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 90-4-2	45.0	60.0	-	-	150 - 136	67.8

Performance Range

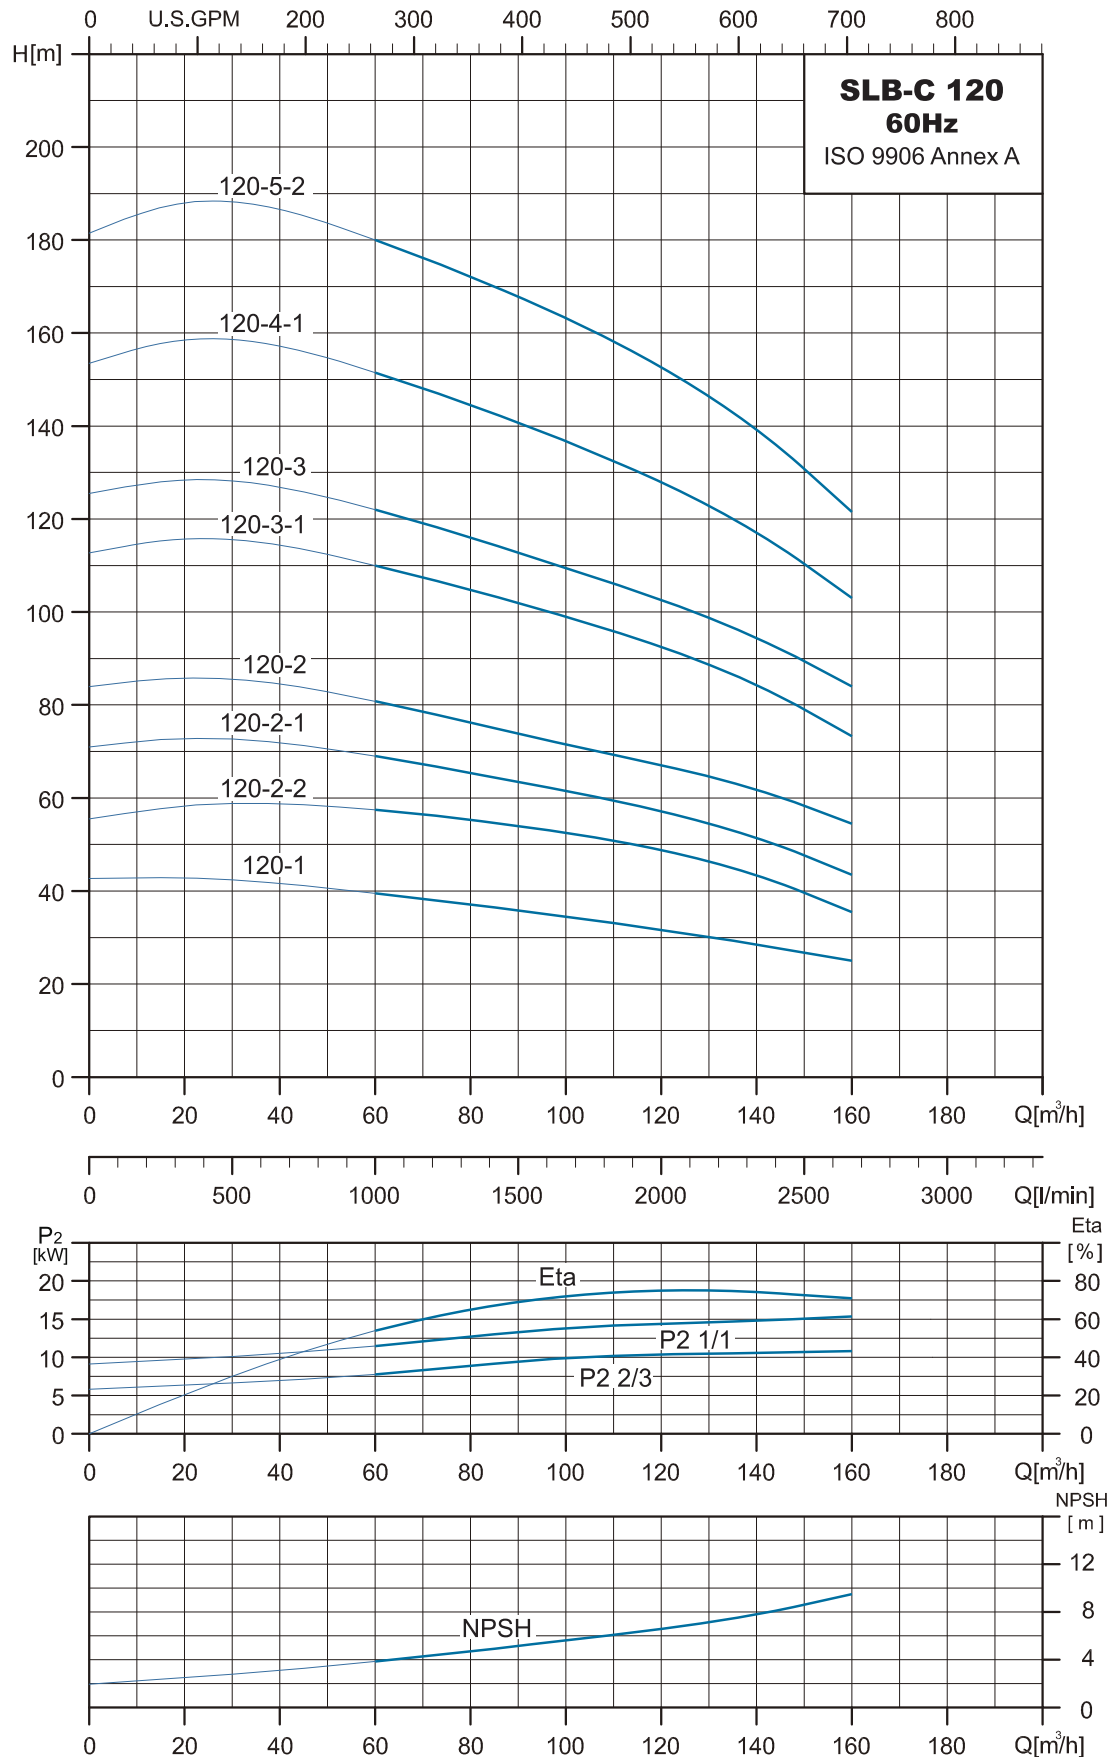


Dimensions and Weights

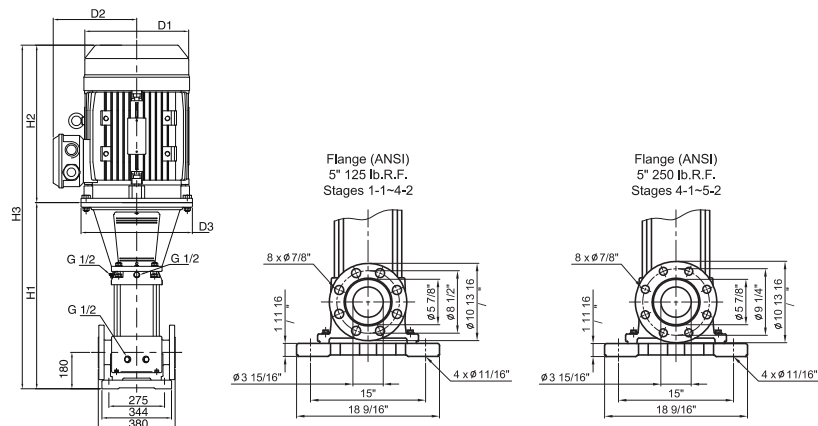


Pump Type	Dimension[mm]						Net Weight [kg]
	flange			D1	D2	D3	
	H1	H2	H3				flange
SLB-C 120-1	834	540	1374	318	241	350	239.1
SLB-C 120-2-2	990	660	1650	390	295	400	365.5
SLB-C 120-2-1	990	660	1650	390	295	400	365.5
SLB-C 120-2	990	660	1650	390	295	400	383.5
SLB-C 120-3-1	1149	690	1839	446	325	450	469.5
SLB-C 120-3	1175	770	1945	485	355	550	589.8
SLB-C 120-4-1	1331	845	2176	550	410	550	716.2
SLB-C 120-5-2	1486	845	2331	550	410	550	726.2

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-C 120-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 120-2-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 120-2-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-C 120-2	37.0	50.0	-	-	124 - 112	56.1
SLB-C 120-3-1	45.0	60.0	-	-	150 - 136	67.8
SLB-C 120-3	55.0	75.0	-	-	183 - 166	82.9
SLB-C 120-4-1	75.0	100.0	-	-	248 - 224	112
SLB-C 120-5-2	75.0	100.0	-	-	248 - 224	112

Performance Range

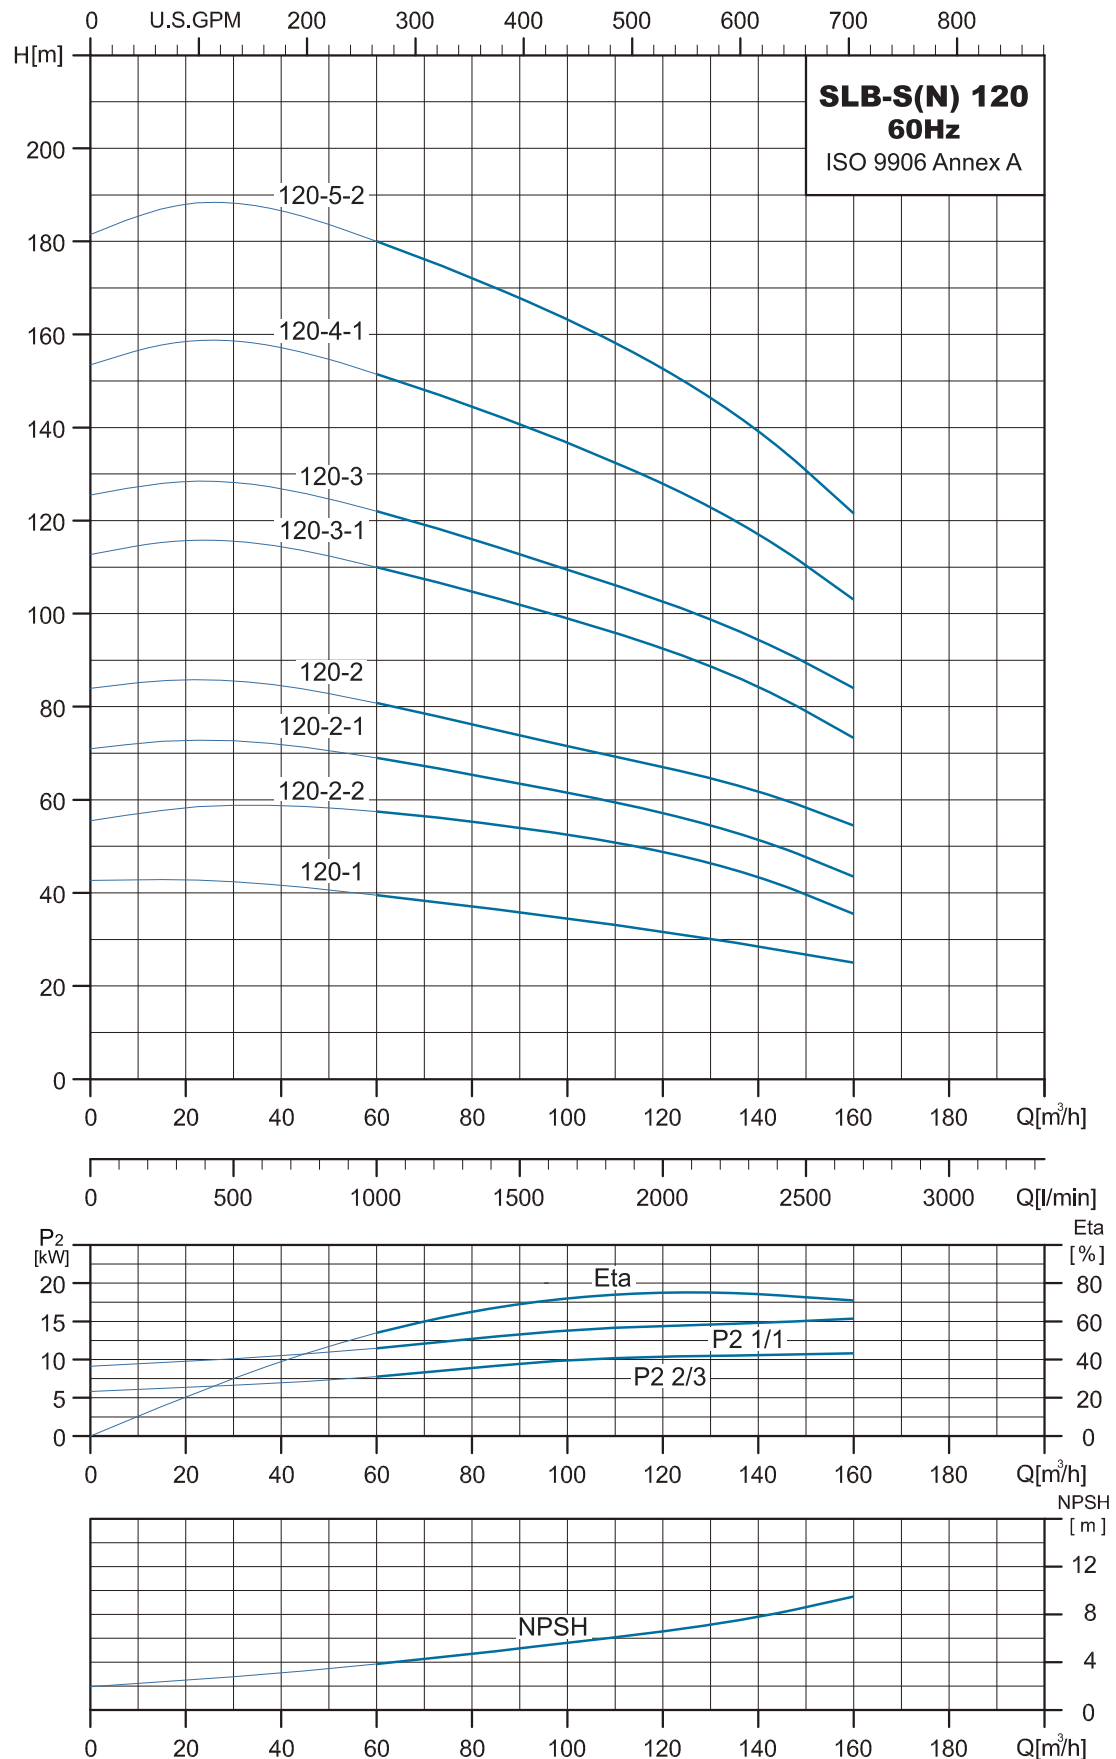


Dimensions and Weights

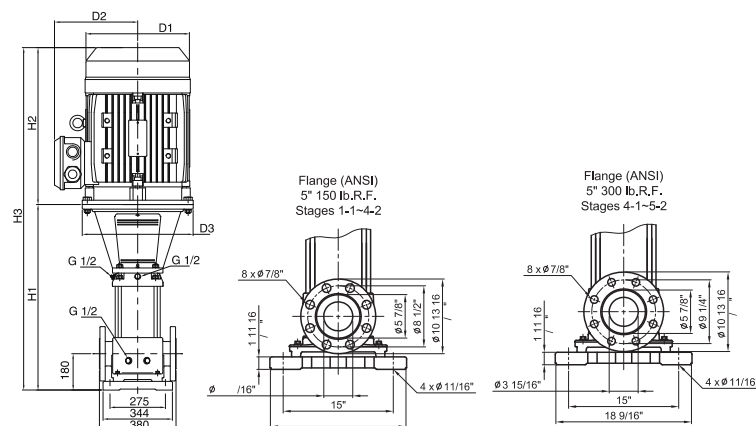


Pump Type	Dimension[mm]						Net Weight [kg]
	flange			D1	D2	D3	
	H1	H2	H3				
SLB-S(N) 120-1	837	540	1377	318	241	350	219.2
SLB-S(N) 120-2-2	993	660	1653	390	295	400	349.8
SLB-S(N) 120-2-1	993	660	1653	390	295	400	349.8
SLB-S(N) 120-2	993	660	1653	390	295	400	367.9
SLB-S(N) 120-3-1	1152	690	1842	446	325	450	454.0
SLB-S(N) 120-3	1178	770	1948	485	355	550	574.4
SLB-S(N) 120-4-1	1334	845	2179	550	410	550	701.0
SLB-S(N) 120-5-2	1489	845	2334	550	410	550	711.0

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-S(N) 120-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 120-2-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 120-2-1	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 120-2	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 120-3-1	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 120-3	55.0	75.0	-	-	183 - 166	82.9
SLB-S(N) 120-4-1	75.0	100.0	-	-	248 - 224	112
SLB-S(N) 120-5-2	75.0	100.0	-	-	248 - 224	112

Performance Range

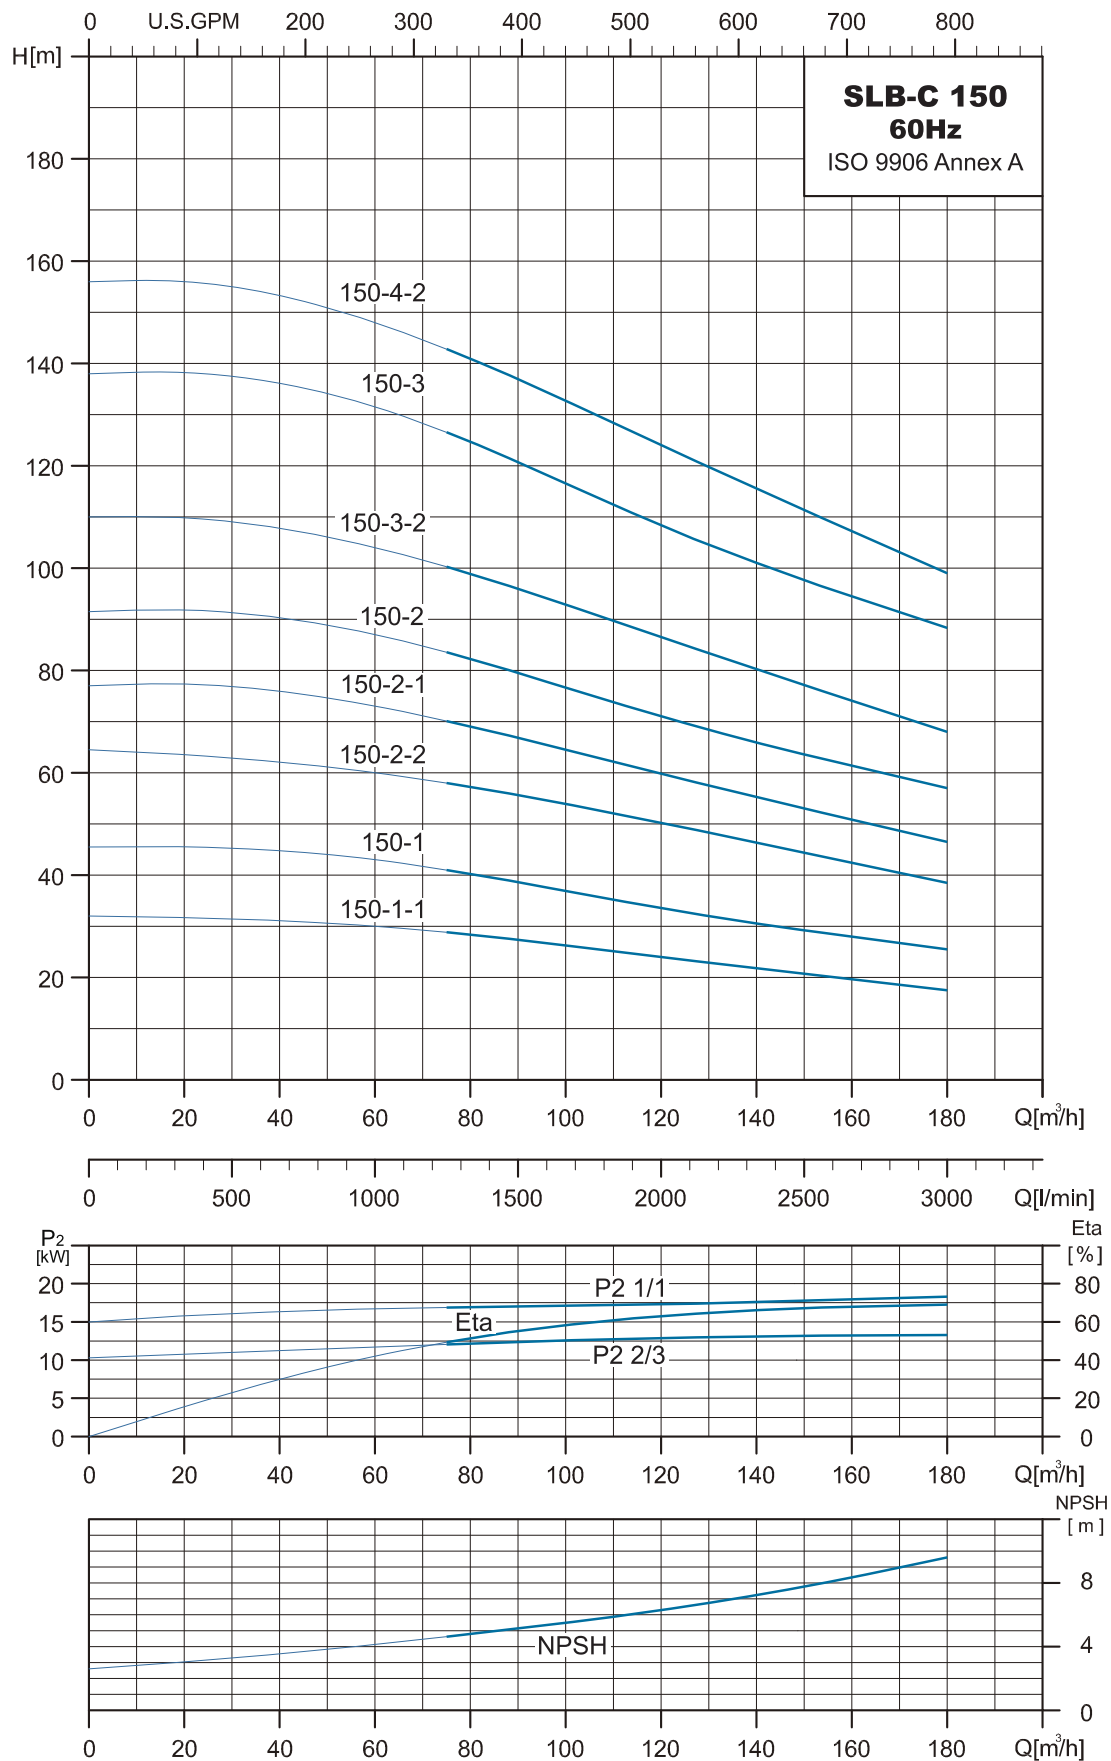


Dimensions and Weights

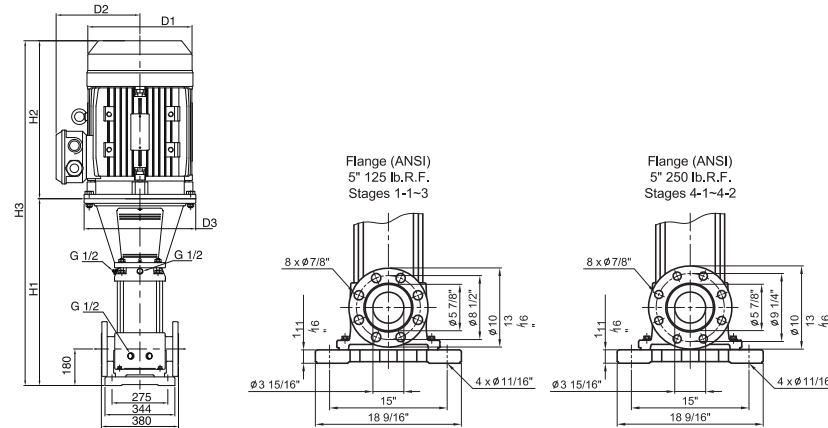


Pump Type	Dimension[mm]						Net Weight [kg]
	flange			D1	D2	D3	
	H1	H2	H3				
SLB-C 150-1-1	837	540	1377	318	241	350	219.2
SLB-C 150-1	993	660	1653	390	295	400	349.8
SLB-C 150-2-2	993	660	1653	390	295	400	349.8
SLB-C 150-2-1	993	660	1653	390	295	400	367.9
SLB-C 150-2	1152	690	1842	446	325	450	454.0
SLB-C 150-3-2	1178	770	1948	485	355	550	574.4
SLB-C 150-3	1334	845	2179	550	410	550	701.0
SLB-C 150-4-2	1489	845	2334	550	410	550	711.0

Pump Type	Motor		Nominal Current [A]			
	P2		3Ø			
	[kW]	[HP]	△220-277V	Y380-480V	△208-230V	Y460V
SLB-C 150-1-1	18,5	25,0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-C 150-1	22,0	30,0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-C 150-2-2	30,0	40,0	-	-	101 - 91.6	45.8
SLB-C 150-2-1	37,0	50,0	-	-	124 - 112	56.1
SLB-C 150-2	45,0	60,0	-	-	150 - 136	67.8
SLB-C 150-3-2	55,0	75,0	-	-	183 - 166	82.9
SLB-C 150-3	75,0	100,0	-	-	248 - 224	112
SLB-C 150-4-2	75,0	100,0	-	-	248 - 224	112

Performance Range

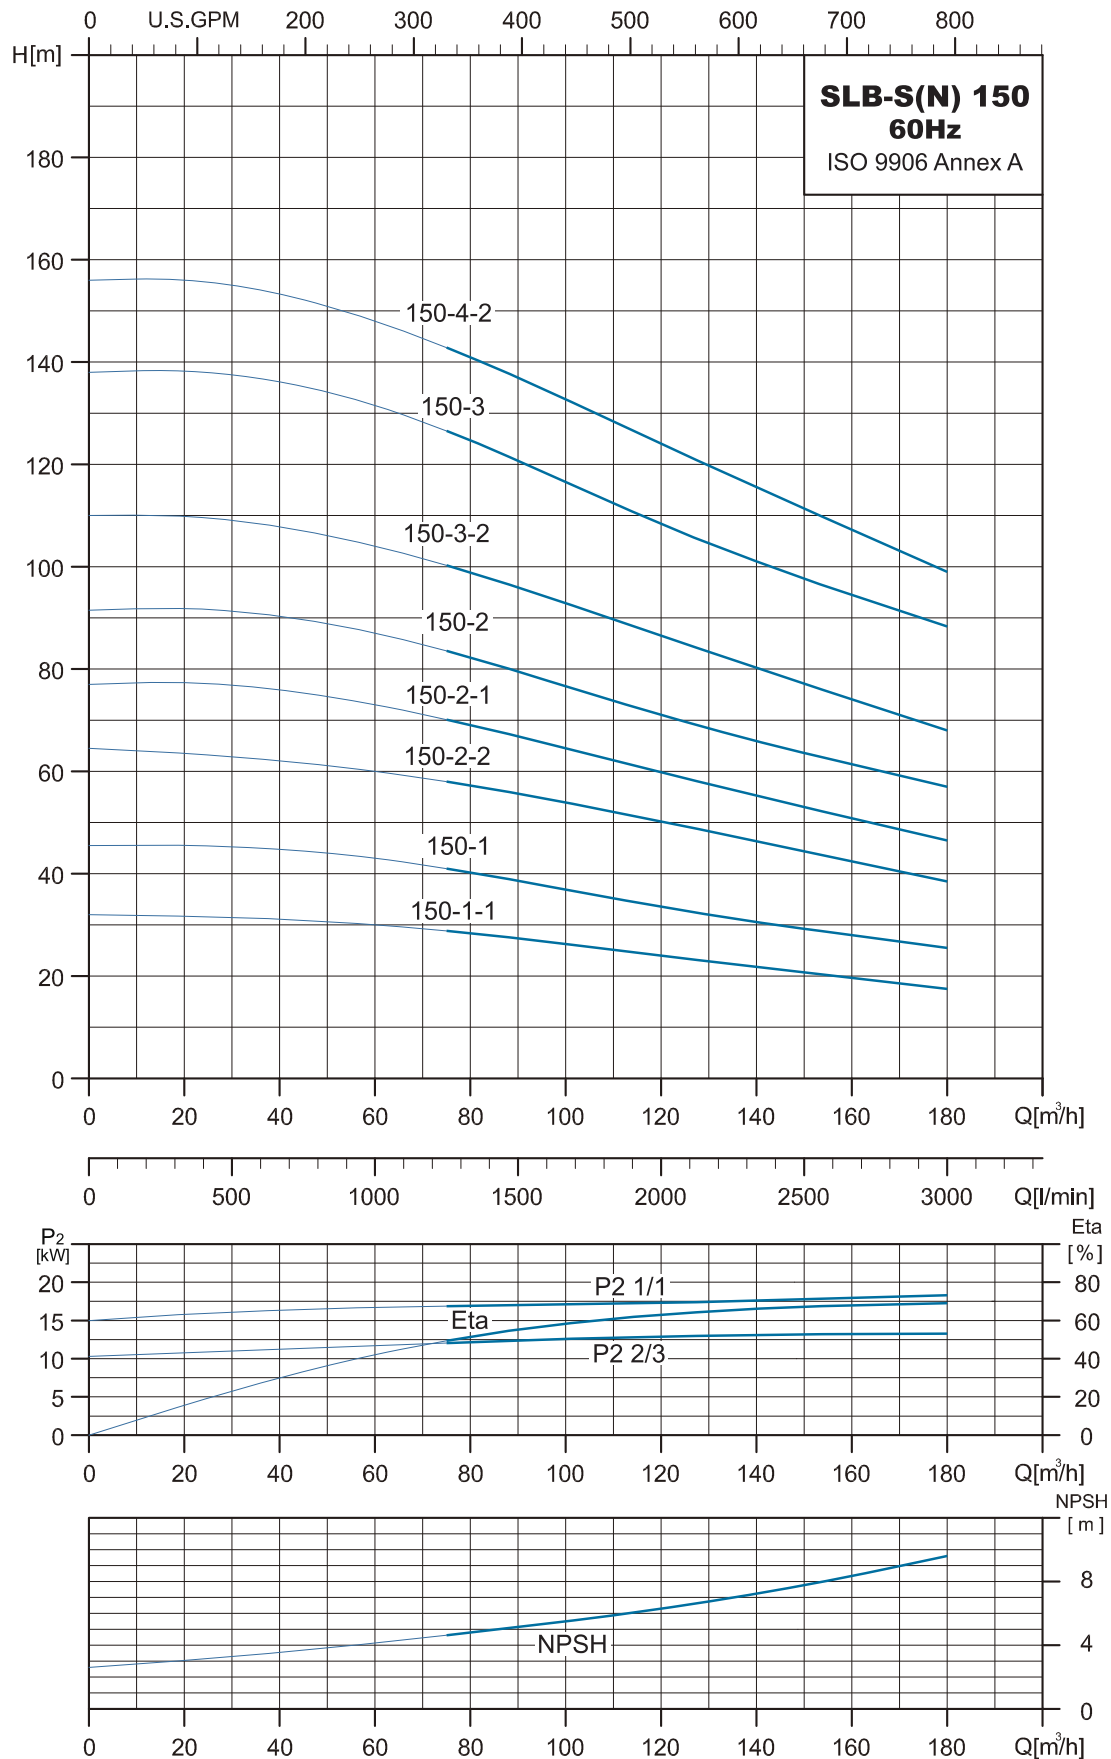

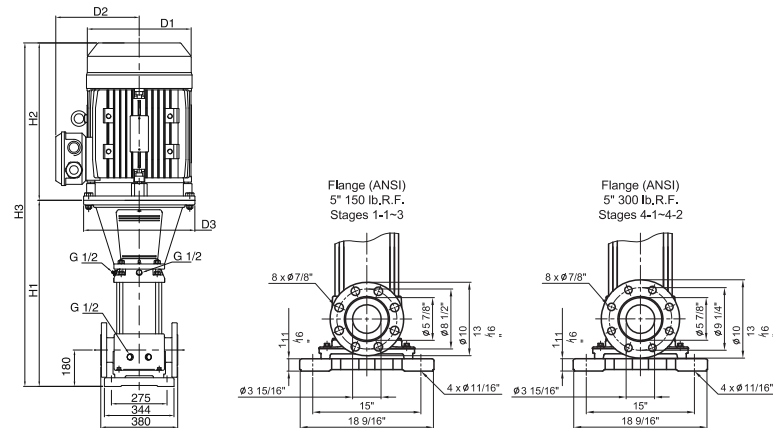

Pump Type	Dimension[mm]						Net Weight [kg]
	flange			D1	D2	D3	
	H1	H2	H3				
SLB-S(N) 150-1-1	837	540	1377	318	241	350	219.2
SLB-S(N) 150-1	993	660	1653	390	295	400	349.8
SLB-S(N) 150-2-2	993	660	1653	390	295	400	349.8
SLB-S(N) 150-2-1	993	660	1653	390	295	400	367.9
SLB-S(N) 150-2	1152	690	1842	446	325	450	454.0
SLB-S(N) 150-3-2	1178	770	1948	485	355	550	574.4
SLB-S(N) 150-3	1334	845	2179	550	410	550	701.0
SLB-S(N) 150-4-2	1489	845	2334	550	410	550	711.0

Pump Type	Motor		Nominal Current [A]			
	P2		3ø			
	[kW]	[HP]	Δ220-277V	Y380-480V	Δ208-230V	Y460V
SLB-S(N) 150-1-1	18.5	25.0	59.7 - 49.3	34.5 - 28.5	-	-
SLB-S(N) 150-1	22.0	30.0	70.4 - 58.5	40.7 - 33.8	-	-
SLB-S(N) 150-2-2	30.0	40.0	-	-	101 - 91.6	45.8
SLB-S(N) 150-2-1	37.0	50.0	-	-	124 - 112	56.1
SLB-S(N) 150-2	45.0	60.0	-	-	150 - 136	67.8
SLB-S(N) 150-3-2	55.0	75.0	-	-	183 - 166	82.9
SLB-S(N) 150-3	75.0	100.0	-	-	248 - 224	112
SLB-S(N) 150-4-2	75.0	100.0	-	-	248 - 224	112



SYSTEMFLO

Walrus America Inc.
20220 Hempstead Road, Suite #30
Houston, TX 77065

Tel:(281) 955-8035
Fax:(281) 955-8037
E-mail: sales@walrusamerica.com